



Rev.	Description	Date
A0	New release	2021.03.12

### 1. PHYSICAL CHARACTERISTICS (mm)

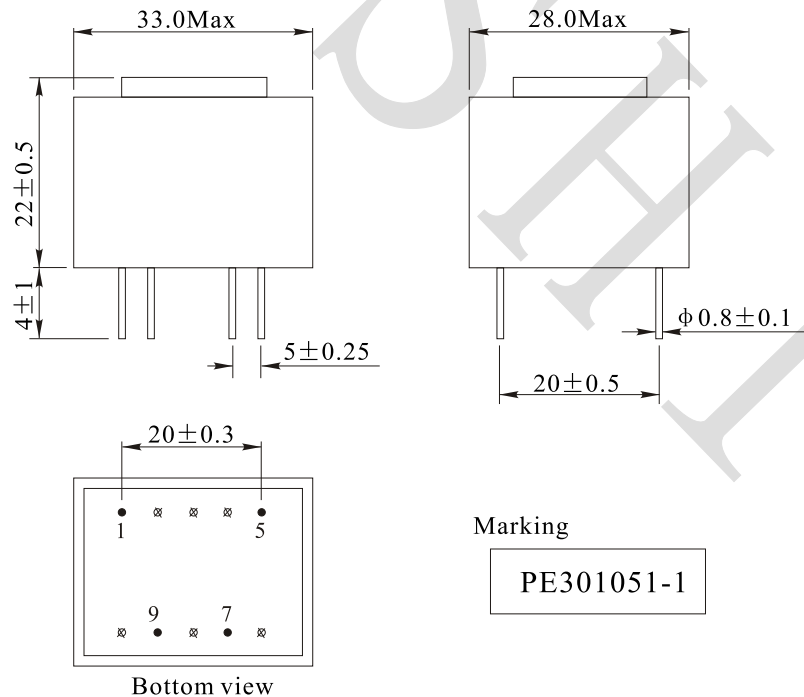

### 2. ELECTRONICAL SCHEMATIC

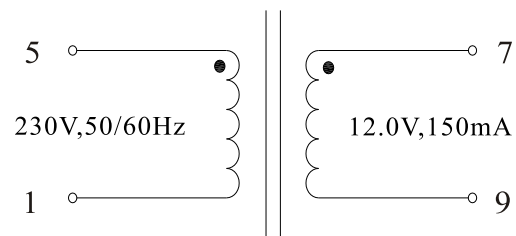

### 3. ELECTRONICAL SPECIFICATIONS

Pri Voltage: 230V, 50/60Hz

Load sec voltage: 12.0VAC

Load sec current: 150mA

Noload sec voltage: 16.6V

Electric strength: 3600V/AC, 10mA, 2sec

Test Instrument:

L: HP4284A

RDC: HM2540

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

NAME:	Potting transformer		
CUSTOMER P/N:	BVEI3022022	DATE:	2021-03-12
SHINHOM P/N:	PE301051-1	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



**SHINHOM**  
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization