
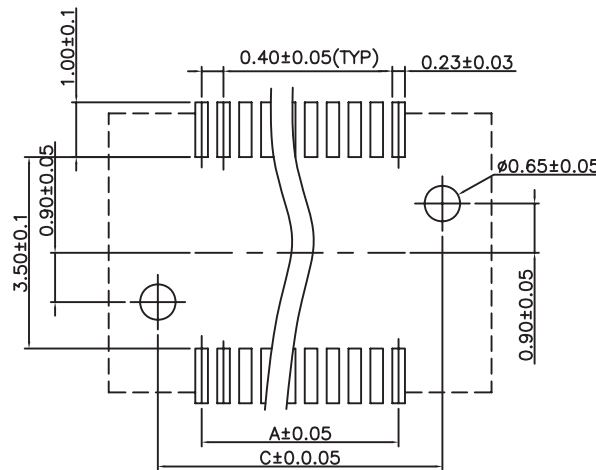


Specifications


1. Current Rating : 0.3A AC/DC
2. Voltage Rating : 50V AC/DC
3. Contact Resistance : 40m ohm. max.
4. Insulation Resistance : 100M ohm. min.at 100V DC
5. Withstanding Voltage :100V AC for one minute
6. Operating Temperature Range : -25° C to +85° C

Material and Plating

- 1.Housing : LCP (Natural Color)UL94V-0
 - 2.Contact : Phosphor Bronze
 - 3.Plating : 3u" Gold Flash
- Number Of Connector:2500pcs/Reel

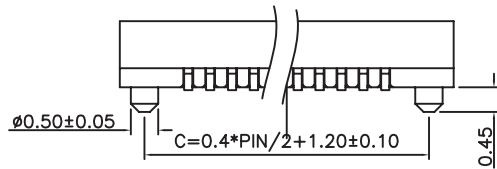

PCB LAYOUT

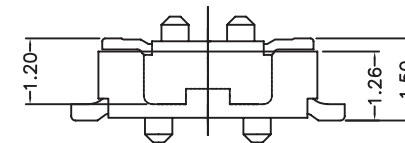

Mating Height Draw (Reference)

Contact Diminsion

N(PIN)	DIM.A	DIM.B	DIM.C	N(PIN)	DIM.A	DIM.B	DIM.C
16P	2.80	5.30	4.40	40P	7.60	10.10	9.20
20P	3.60	6.10	5.20	50P	9.60	12.10	11.20
24P	4.40	6.90	6.00	60P	11.60	14.10	13.20
30P	5.60	8.10	7.20	70P	13.60	16.10	15.20
32P	6.00	8.50	7.60	80P	15.60	18.10	17.20
34P	6.40	8.90	8.00				

NPF-S13P-xxx-LF
LEADFREE

RoHS Compliant



PART NO. NPF-S13P-xxx

DWG NO. NPF-S13P-xxx

FILE NO.

UNIT / mm SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ± 0.15
.XXX ±
AWG

DESCRIPTION:

0.4mm Board To Board Female
1.26mm High

AREA

REVISIONS

HK

DATE

www.promelec.ru