

CUSTOMER :

DATE _____ :

PRELIMINARY

SPECIFICATIONS FOR APPROVAL

PRODUCT NAME : Top View Type White SMD LED


MODEL NAME :

CUSTOMER P/N :

APPROVAL	REMARK

APPENDIX


Designed	Checked	Approved	LG Innotek Co., Ltd.	
			DOCUMENT No.	
			PAGE	1 / 18

		DOCUMENT No :
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 2 / 18

Change History of Revision

PRELIMINARY

Revision	Date	Contents of Revision Change	Remark

 LG Innotek	DOCUMENT No :	
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 3 / 18

PRELIMINARY

CONTENTS

1. Features	-----	4 / 18
2. Outline dimensions	-----	4 / 18
3. Applications	-----	5 / 18
4. Absolute Maximum Ratings	-----	5 / 18
5. Electro-Optical characteristics	-----	5 / 18
6. Rank Sorting Method	-----	6 ~ 7 / 18
7. Typical Characteristic Curves	-----	8 ~ 9 / 18
8. Reliability Test Items and Conditions	-----	10 / 18
9. Package and Marking of Products	-----	11 ~ 14 / 18
10. Cautions on use	-----	15 ~ 17 / 18
11. Others	-----	18 / 18


PRELIMINARY

1. Features

- Lighting Color : White
- Small size surface mount type : 5.1 × 5.2 × 1.0 mm (L × W × H)
- Soldering methods : IR reflow soldering
- Taping : 12 mm conductive black carrier tape & antistatic clear cover tape.
1,000pcs/reel, Φ178 mm wheel

2. Outline Dimensions

(Unit : mm)

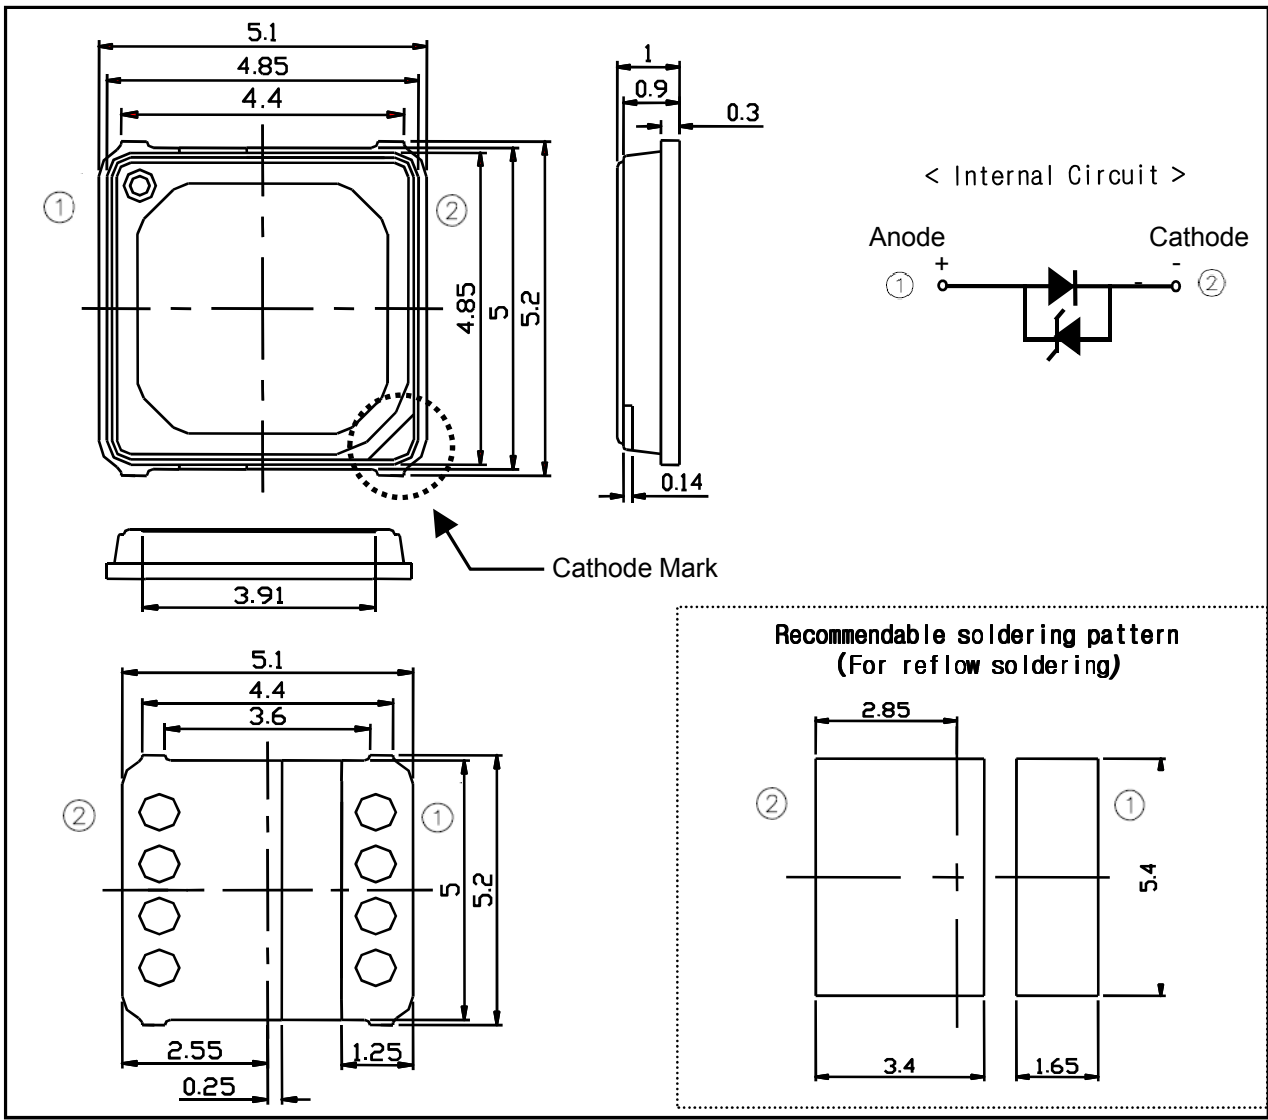



REG. DATE : '11. 07. 25

SPECIFICATION

REV.NO : 0

REV. DATE :

MODEL NAME : LEMWS51Q80GZ00

PAGE : 5 / 18

3. Applications

PRELIMINARY

- Interior and Exterior Illumination, Automotive Lighting

4. Absolute Maximum Ratings

Items	Symbol	Ratings	Unit
Forward Current	I_F	140	mA
Pulse Forward Current *1)	I_{Fp}	260	mA
Power Consumption	P_D	476	mW
Operating Temperature	T_{opr}	-30 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Junction Temperature	T_j	< 110	°C

*1) Pulse Width ≤ 30msec, Duty ≤ 10%

5. Electro – Optical –Thermal Characteristics

(Ta=25°C)

Items	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=65[mA]$	2.9	-	3.3	V
Reverse Voltage *1) (Zener Diode)	V_R	$I_R=10[mA]$	0.6	-	1.2	V
Luminous Flux	Φ_V	$I_F=65[mA]$	22	-		lm
Luminous Intensity	I_v	$I_F=65[mA]$	7.2	-		cd
CIE Value	X / Y	$I_F=65[mA]$	Refer to '6. Rank Sorting Method'			-
Viewing Angle	2 Θ 1/2	$I_F=65[mA]$	-	120	-	deg
Color Rendering Index	Ra	$I_F=65[mA]$	80	-	-	-

*1) The value is based on 1-die performance of Zener Diode.

※ These values measured by Optical Spectrum Analyzer of LG Innotek Co., LTD and tolerances are followings as below

- Luminous Flux (Φ_V) : ±10%, Forward Voltage(V_F) : ±0.1, CIE Value : ±0.01
- CRI Value : ±3%



PRELIMINARY

6. Rank Sorting Method

Rank of Luminous Flux (@65mA)

Rank	Φ_V (lm, @65mA)		
	Min	Typ	Max
Q	22	-	-

Rank of CIE Value (@65mA)

CCT	Rank	CIE X	CIE Y
5700K (5665K ± 355K)	G1	0.3207	0.3462
		0.3291	0.3538
		0.3292	0.3382
		0.3217	0.3314
	G2	0.3217	0.3314
		0.3292	0.3382
		0.3293	0.3305
		0.3222	0.3243
	G3	0.3291	0.3538
		0.3376	0.3616
		0.3369	0.3449
		0.3292	0.3382
	G4	0.3292	0.3382
		0.3369	0.3449
		0.3366	0.3369
		0.3293	0.3305

Rank of Luminous Intensity (@65mA)

Rank	I_V (cd, 60mA)		
	Min	Typ	Max
Q	7.2	-	-

Rank of CRI (@65mA)

Rank	CRI (Ra, @65mA)		
	Min	Typ	Max
80	80	-	-

Rank of Forward Voltage (@65mA)

Rank	VF(V, @65mA)		
	Min	Typ	Max
0	2.90	2.95	3.00
1	3.00	3.05	3.10
2	3.10	3.15	3.20
3	3.20	3.25	3.30

※ Rank name method: Please refer to the following

example Rank Name : Q – G1 – 2

Φ_V rank = Q, CIE rank = G1, VF Rank = 2

* Voltages are tested at a current pulse duration of 1 ms and an accuracy of ± 5.0%.

* This categories are established for classification of products.


* VF values are based on 1-die performance.

* Φ_V , CIE values are based on 1-die performance.



PRELIMINARY

Chromaticity Diagram

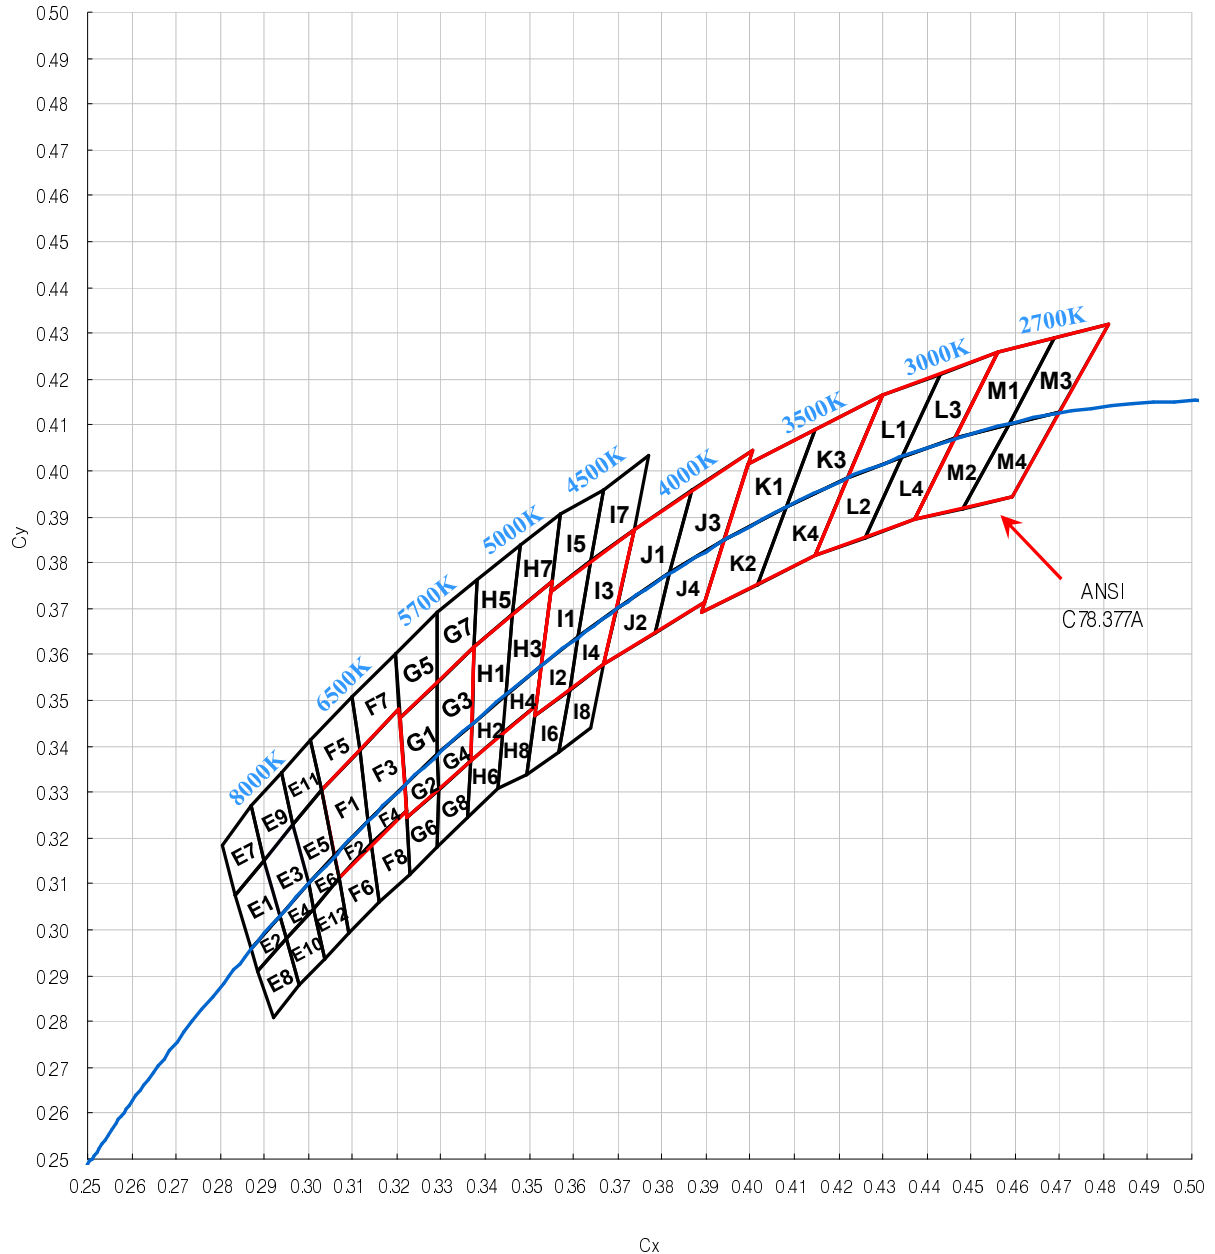


* The quantity-ratio of CIE ranks is decided by LGIT
 * Color Coordinate is based on the CIE 1931 Chromaticity Diagram


PRELIMINARY

7. Typical Characteristic Curves


■ Forward Voltage vs. Forward Current

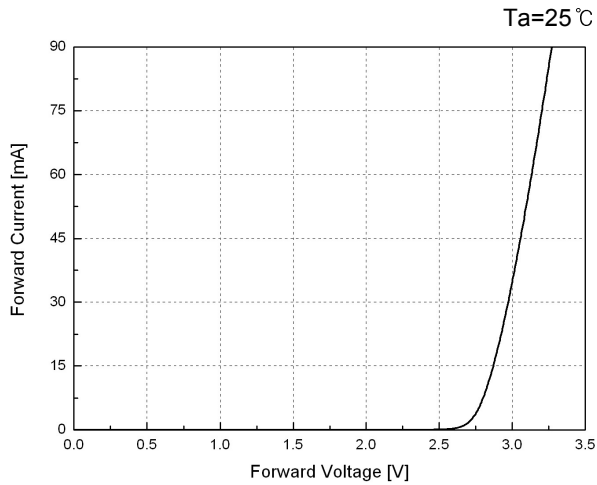


■ Forward Current vs. Luminous Flux

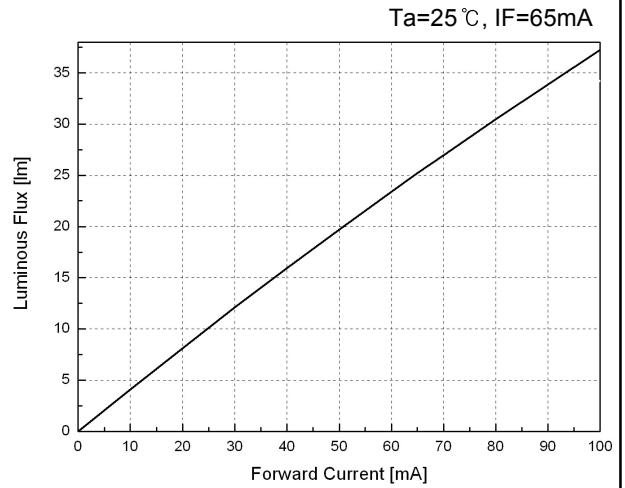

■ Spectrum

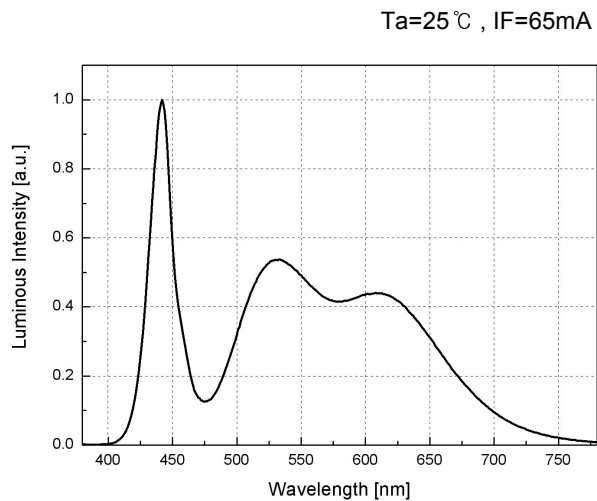

■ Radiation Characteristics

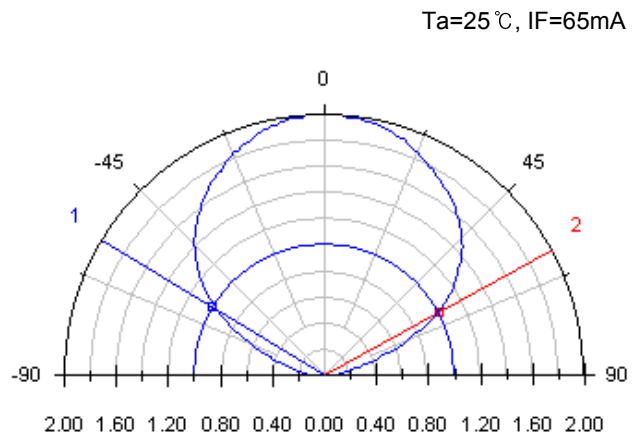





PRELIMINARY

7. Typical Characteristic Curves


■ Luminous Flux vs. Temp.

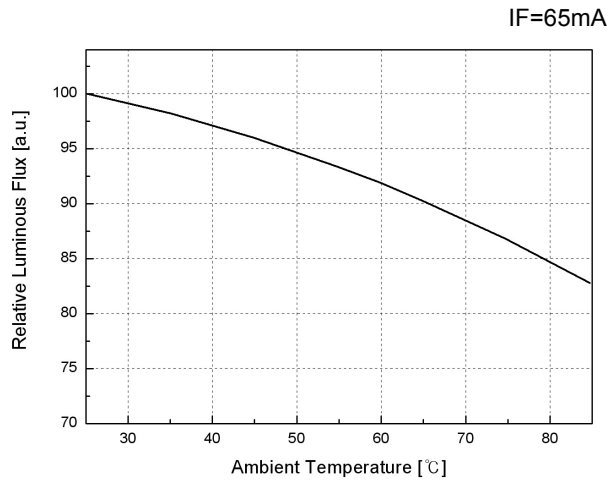


■ VF vs. Temp.

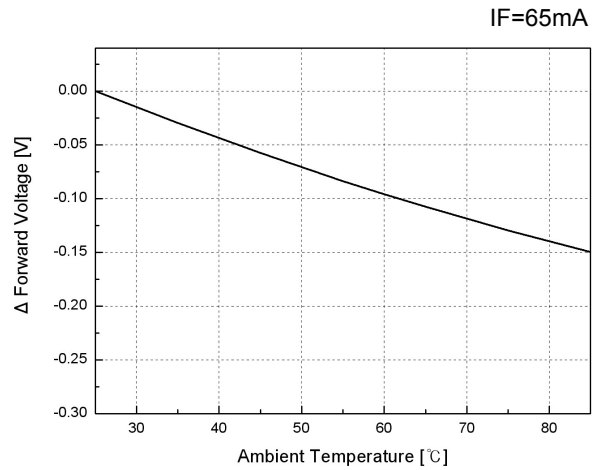


■ Cx vs. Temp.

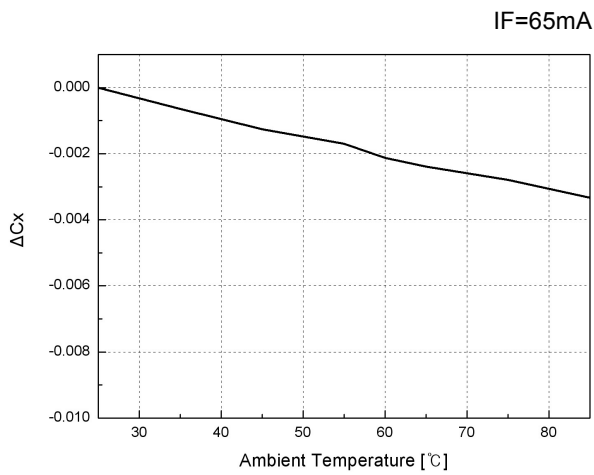

■ Cy vs. Temp.

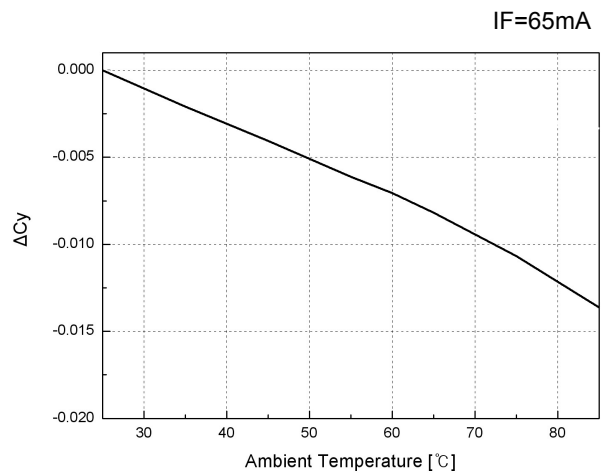

	DOCUMENT No :	
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 10 / 18

8. Reliability Test Items and Conditions

PRELIMINARY


8-1. Results of Reliability Test1

Item	Symbol	Test Condition	Criteria	
			Min.	Max.
Forward Voltage	V_F	$I_F = 65\text{mA}$	-	U.S.L.× 1.1
Luminous intensity	I_v	$I_F = 65\text{mA}$	$S \times 0.7$	-

*U.S.L : Upper Spec Limit, *L.S.L : Lower Spec Limit *S : Initial Value

※ The Reliability criteria of ESD Test is judged by V_F shift ($\pm 0.2\text{V}@8\text{mA}$) or impedance(Ω) check data.

8-2. Results of Reliability Test

No	Item	Test Condition	Test Hours/ Cycles	Sample No	Ac/Re
1	Steady State Operating Life	$T_a=25^\circ\text{C}$, $I_F=65\text{mA}$	1000hr	22 pcs	0 / 1
2	High Temp. Humidity Life I	$T_a=60^\circ\text{C}$, $\text{RH}=90\%$, $I_F=65\text{mA}$	1000hr	22 pcs	0 / 1
3	Steady State Operating Life of High Temperature	$T_a=85^\circ\text{C}$, $I_F=65\text{mA}$	1000hr	22 pcs	0 / 1
4	Steady State Operating Life of Low Temperature	$T_a= -30^\circ\text{C}$, $I_F=65\text{mA}$	1000hr	22 pcs	0 / 1
5	High Temp. Storage	$T_a=100^\circ\text{C}$	1000hr	22 pcs	0 / 1
6	Low Temp. Storage	$T_a=-40^\circ\text{C}$	1000hr	22 pcs	0 / 1
7	High Temperature High Humidity Storage	$T_a=85^\circ\text{C}$, $\text{RH}=85\%$	1000hr	22 pcs	0 / 1
8	Temperature Cycle	$-40^\circ\text{C}(30\text{min}) \sim 25^\circ\text{C}(5\text{min})$ $\sim 100^\circ\text{C}(30\text{min}) \sim 25^\circ\text{C}(5\text{min})$	100cycle	22 pcs	0 / 1
9	Thermal Shock	$100^\circ\text{C}(15\text{min}) \sim -40^\circ\text{C}(15\text{min})$	50cycle	22 pcs	0 / 1
10	Electrostatic Discharge (HBM Mode) Test Voltage 2KV	 <p>$R1 : 10\text{M}\Omega$, $R2 : 1.5\text{K}\Omega$ $C : 100\text{pF}$</p>	3times	22 pcs	0 / 1
11	Resistance to Soldering Heat (Reflow Soldering)	$T_{\text{sld}}=260^\circ\text{C}$, 10sec (Pre treatment 30°C , 70%, 168hr)	2 times	22 pcs	0 / 1



PRELIMINARY

9. Package and Marking of Products

9-1. Taping Outline Dimension

Dimension of Reel


(Unit : mm)

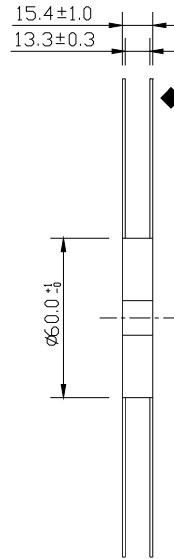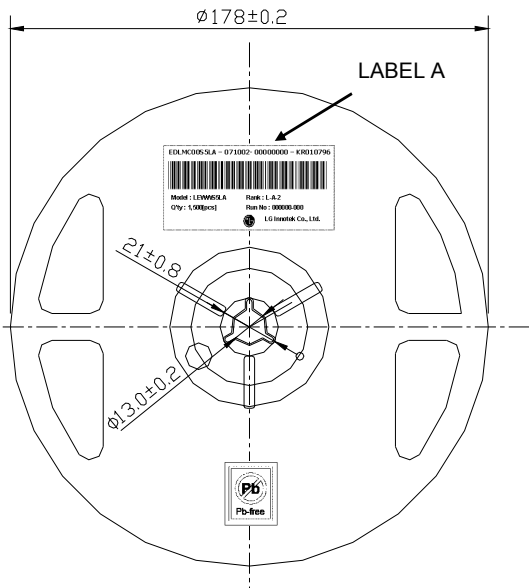


◆ Packing Materials :


- Reel : Conductive PS (Black)
- Emboss Tape : Conductive PS (Black)
- Cover Tape : Conductive PET Base

Dimension of Tape

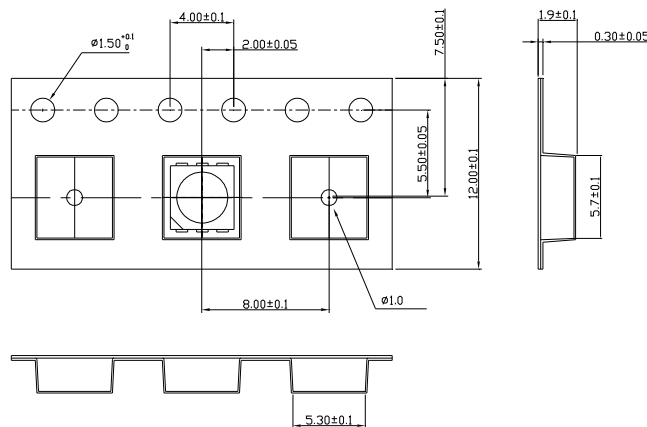

Arrangement of Tape

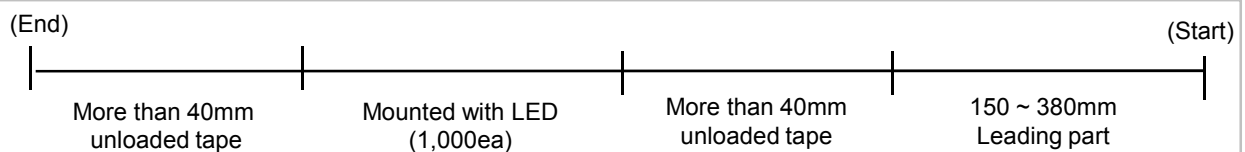


		DOCUMENT No :
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 12 / 18

PRELIMINARY

9-2. Package

Products are packed in one bag of 1,000 pcs (one taping reel) and a label is affixed on each bag specifying Model , Rank, Quantity and Run number.

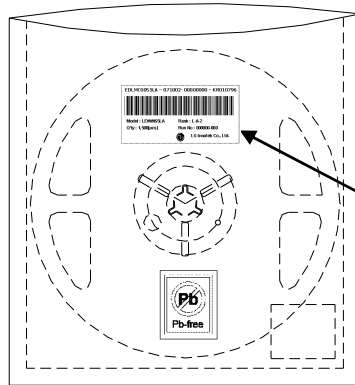


Label A (Model , Rank, Quantity , Run number)

- Package : damp-proof package made of aluminum

※ . Label A

Specifying Model , Rank, Quantity and Run number

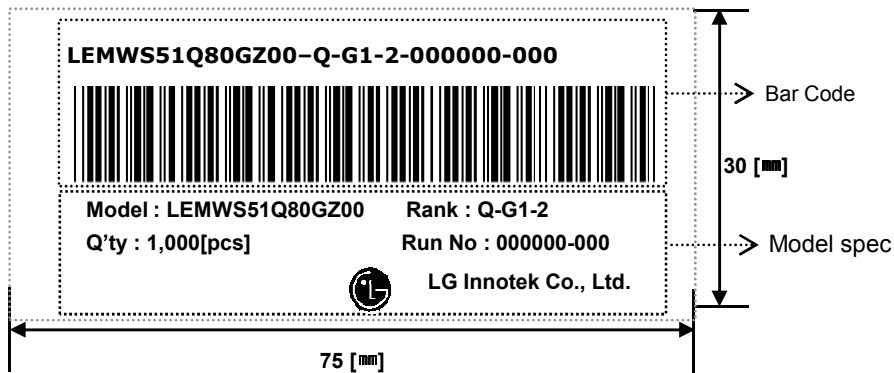

◆ Run no indication


1	2	3	4	5	6	7	8	9
LG Innotek's Own Characters		Manufacture Year(Last number)	Manufacture month	Manufacture date		Serial no		
" "		" 9 "	" 9 "	" 18 "		" 001 "		
		(2009)	(1, 2, 3, 4, 5, 6 7, 8, 9, x, y, z)	(1 ~ 31)		(001 ~ 999)		


PRELIMINARY

9-3. Packing Specifications

Reeled products (numbers of products are 1,000 pcs) packed in a seal off aluminum moisture-proof bag along with desiccants (Silica gel).

Four aluminum bags (total maximum number of products are 4,000 pcs) packed in an inner box and Six inner boxes are put into an outer box.

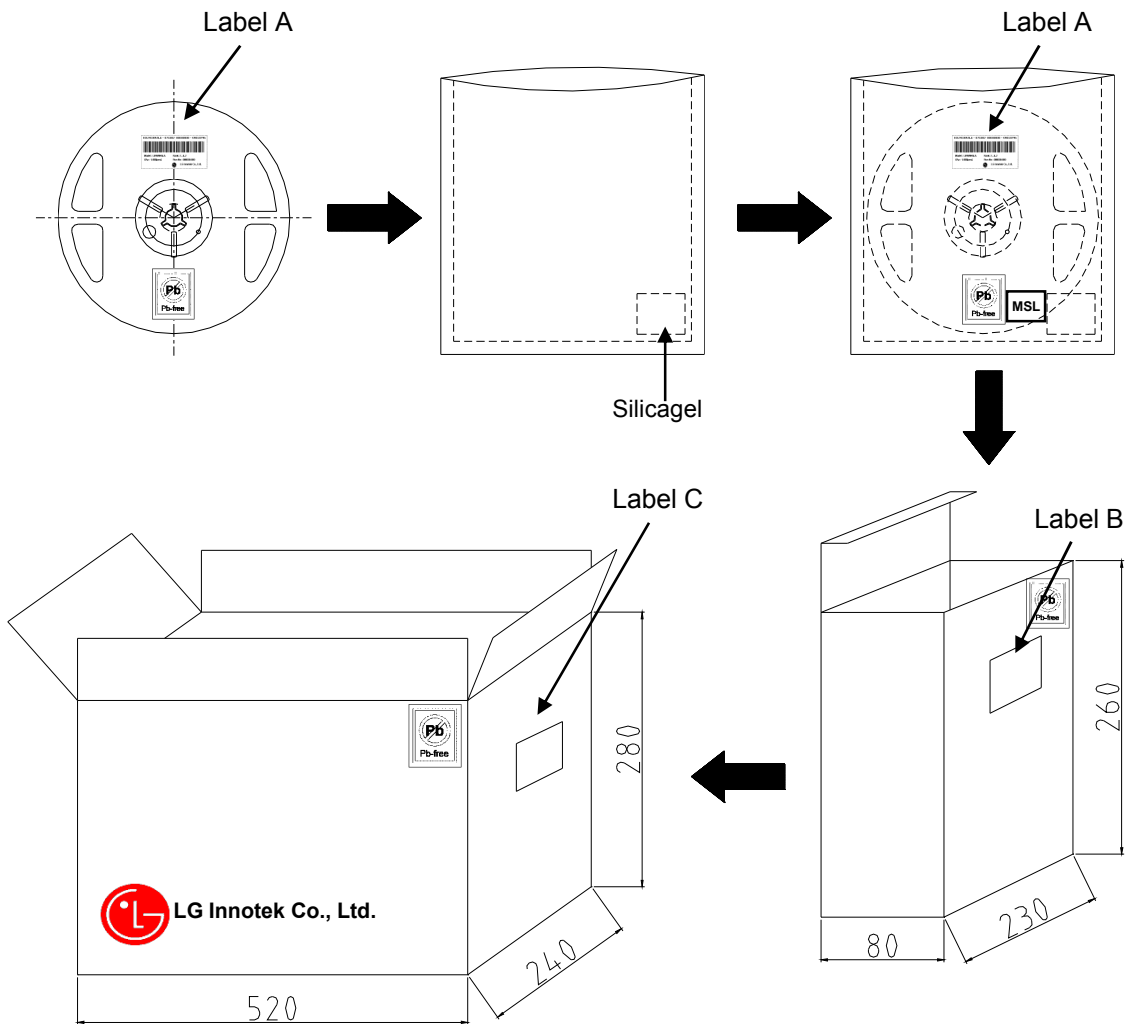


		DOCUMENT No :
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 14 / 18

PRELIMINARY


※. Label B

Specifying Model , Rank, Quantity

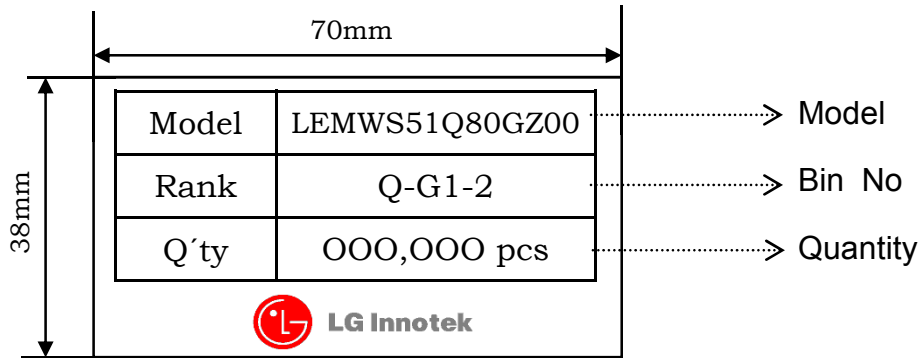



※ Label C

Specifying Customer, Model , Customer part no, Lot No, Quantity

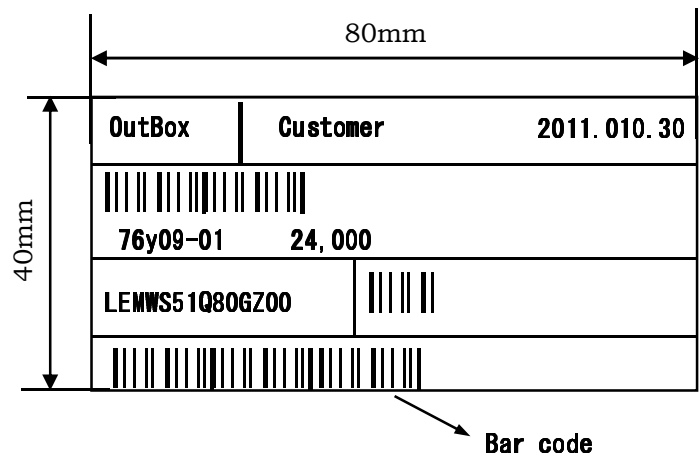

◆ Lot No. indication

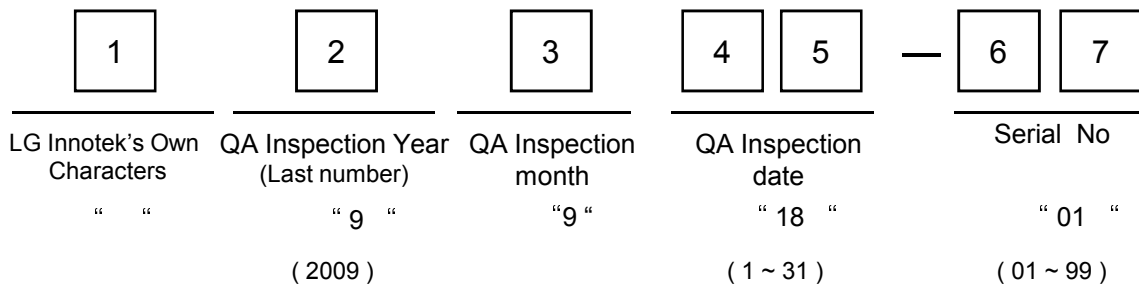

	DOCUMENT No :	
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 15 / 18

PRELIMINARY

10. Cautions on use

10-1. Circuit Layout

In general, the LEDs have a variation of forward voltage. Using LEDs with different forward voltages in a circuit with on resistor for the complete circuit causes different forward currents for each LED. This may lead to a variation in brightness. To avoid brightness variation of LEDs, the use of matrix circuit with one resistor for each LED is recommended.


10-2. Over-current-proof

Customer must apply resistors for protection, others slight voltage shift will cause big current change (Burn out will happen).

LG Innotek will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit if use to exceed the absolute maximum ratings, or not keep the matters that demand special attention.

10-3. For the Storage

- Proper temperature and RH conditions for storage are : 5 °C ~35 °C , RH 60%.
- Do not open moisture-proof bag before the products are ready to use.
- Store products in a moisture-proof bag with a desiccant (Silica gel) after open.
- These products should be used within 168 hours after opening the bag based upon storage condition.
- These products must be baked to remove moisture before using them if the Silica gel loses its color. Conditions for baking are 60±5°C, 20% (RH) and 24 hours maximum. (For reeled status without bag)
- Considering the tape life, we suggest our customers to use our products within a year (from production date)

	DOCUMENT No :	
REG. DATE : '11. 07. 25	SPECIFICATION	REV.NO : 0
REV. DATE :	MODEL NAME : LEMWS51Q80GZ00	PAGE : 16 / 18

PRELIMINARY

10-4. Cleaning

- Please avoid using a brush for cleaning and do not wash the product in organic solvents such as acetone, Organic solvent will damage the surface of LED.
- Please refer to following solvents and conditions.
- Solvent : alcohol, 25°C max × 600sec max

10-5. Static Electricity

- If over-voltage, which exceeds the absolute maximum rating, is applied to the LEDs, it will damage the LEDs and result in destruction. Since the LEDs are sensitive to the static electricity and surge, it is strongly recommended to use a wristband or anti-electrostatic glove when handling the LEDs and all devices, equipment and machinery must be properly grounded.
- Damaged LEDs will show some unusual characteristics such as the leak current remarkably increases, the turn-on voltage becomes lower, or the LEDs do not light at the low current.
- When examining the final product, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. Static-damaged LEDs can easily be found by light-on test or the VF test at a low current.

10-6. Application limits of LED Driver IC controller

- GaN based LED is relatively weak to electrical damages (such as static electricity and over current stress). Forward leakage of LED occurred by such damage in the forward low current region may result in turn-on-delay of LCD back light, which is dependent on a specific function of driver IC.
- For reasons mentioned above, minimum current level (source start-up current) of LED driver IC must be more than 0.3 mA. LGIT cannot make a guarantee on the LED using in Driver IC with start up current level of < 0.3 mA.
- When parallel circuit LED driver IC is applied in BLU, hot spot may occur in low current LCD operation region (dimming mode) by difference of LED voltage in low current region. So, driver IC with Individual LED controller is recommended.



PRELIMINARY

10-7. Recommended Circuit Conditions (schematic)

► **Caution on designing in PCB & Parallel Circuit board**

Using more than 3 pcs of LED per a phone, It is strongly recommend to **use separate resistor per each LED.** (Pic. 1)

Please do notice that it is needed total 3 ea of separate resistor, if one resistor is connected to more than 2 pcs of LED (Pic.2), it can cause serious problem on brightness).

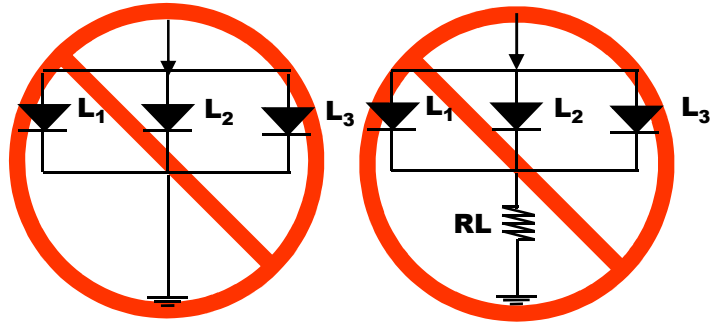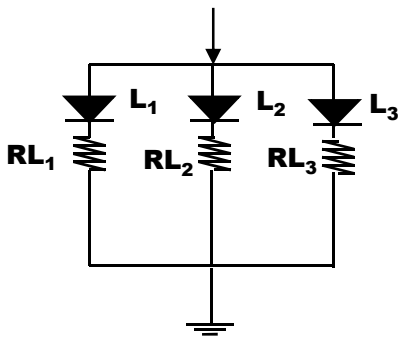

[Pic.1. Recommended Circuit in parallel mode]

: Separate resistor must be used in each LED


[Pic.2. Abnormal Circuit]

: Hot spot may occur especially in low current LCD operation region (dimming mode) by difference of LED voltage.

11. Others

PRELIMINARY

11-1 Lead-free Solder

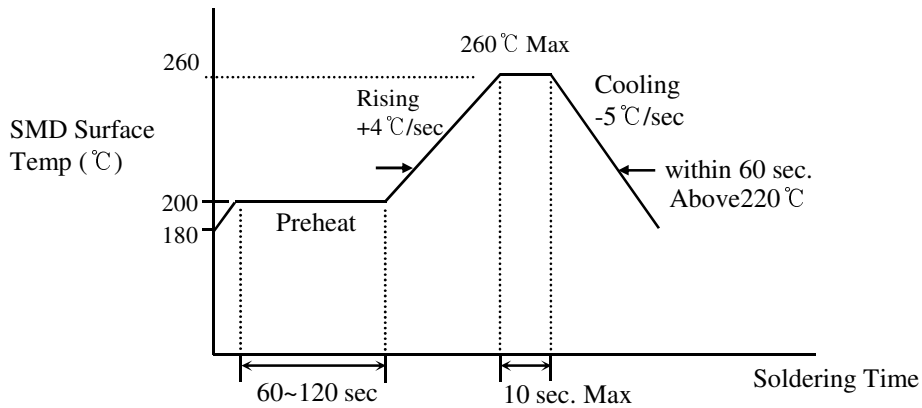

11-2. Soldering Iron

Basic spec is ≤5sec when 260°C. If temperature is higher, time shorter (+10°C → -1sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

11-3. Rework

- 1) Customer must finish rework within 5sec under 245°C.
- 2) The head of Iron can not touch copper foil.
- 3) Twin-head type is preferred.

