


pitch: 5.08 mm
 certification: UL, CE, VDE

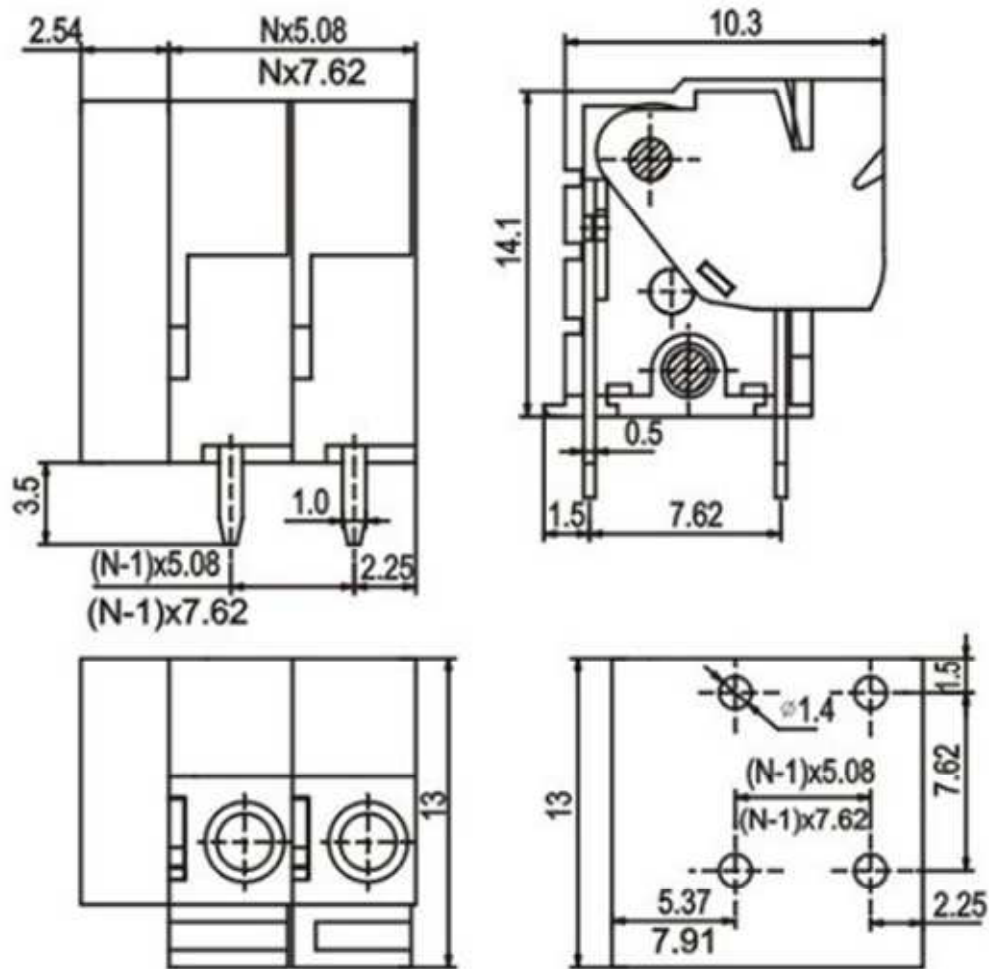

1. Material:

- Housing : PA66, UL94V-0

2. Electrical:

- Rated voltage : 150V
- Rated current : 8A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding voltage: AC1500V/1Min

3. Mechanical:

- Temp. range: -40°C...+105°C
- MAX soldering : +250°C, For 5 Sec

HOW TO ORDER

