
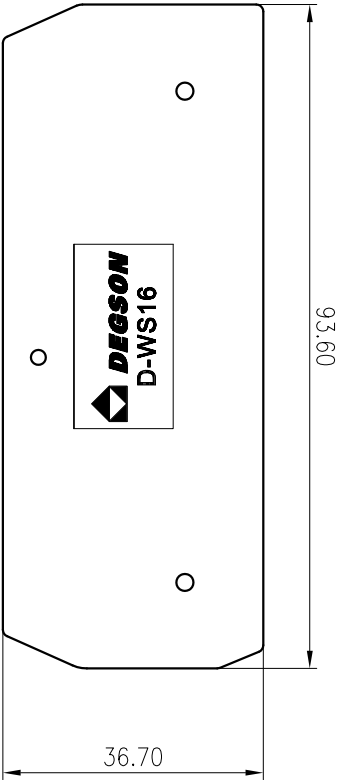
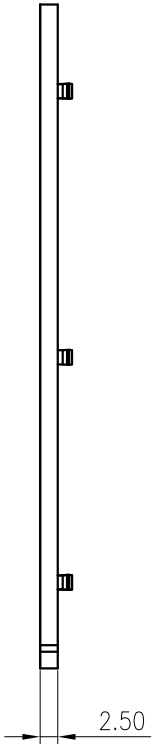


公差帶/General Tolerances(mm)		0.1/1/10
0	>3	±2
~	>6	±1.5
3	~10	±1
6	~18	±0.75
10	~30	±0.5
±0.12	±0.22	±0.37
±0.26	±0.31	±0.57
±0.57	±0.80	±1.05
±1.05	±1.50	±2.00
±2.00	±2.50	±2.50

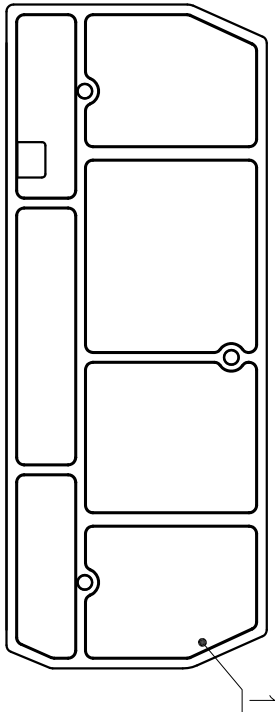

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
间距/Pitch(mm)/线数范围/Poles		2.5/01P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS的要求/Conform to RoHS		Yes	

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.06.06
 CHKD: Mao J 2020.06.06
 DRT: Wang Y 2020.06.10

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: D-WS16-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE