
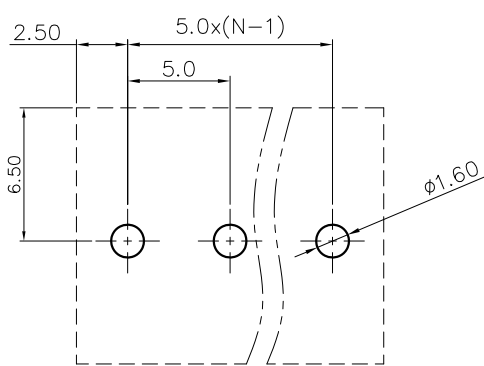
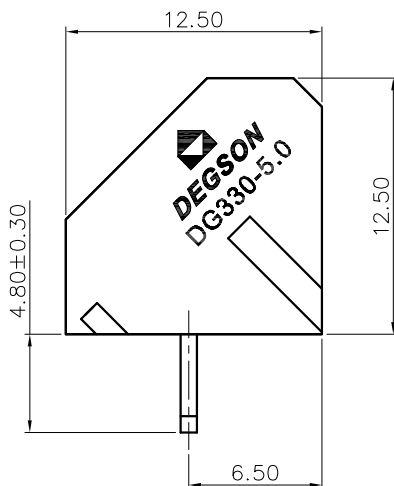
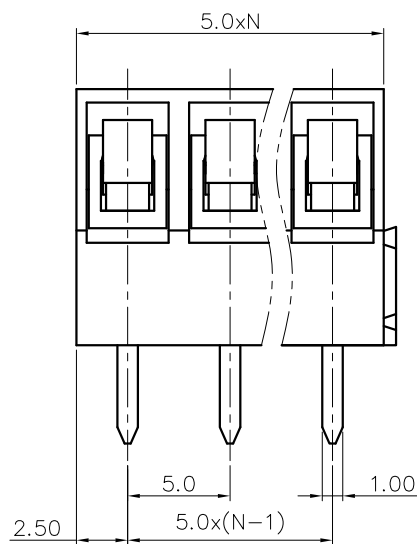
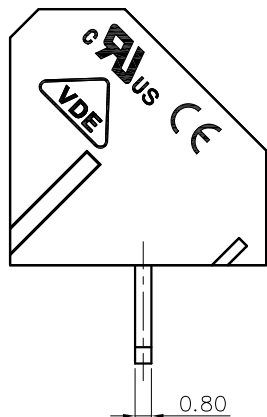


| REVISION RECORD | | | | |
|-----------------|-----|-------------|------|------|
| REV | ECN | DESCRIPTION | DRFT | DATE |
| | | | | |



PCB LAYOUT

NOTES1:

- UL Standard
- 1.Rated Voltage/Current : 300V / 15A
- 2.Torque Value : M2.5 , 3.54Lb.in
- 3.Wire Range : 22~12AWG

IEC Standard


- 1.Rated Voltage/Current : 250V / 24A
- 2.Torque Value : M2.5 , 0.4N.m
- 3.Wire Range : 2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.0mm, Poles : N=02~24P
- 3.Stripping length : 4~5mm
- 4.Withstanding Voltage : AC2000V/1Min.
- 5.Operating temperature : -40°C~+105°C
- 6.Undimensioned Tolerances:

| Pitch range in mm | | Nominal dimension range in mm | | | | — □ ▽ | | |
|-------------------|-------|-------------------------------|-------|-------|-------|-------|-------|--------|
| To | Over | To | Over | To | Over | To | Over | |
| 6 | 10 | 6 | 10 | 30 | 60 | 100 | 150 | 0.1/10 |
| ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±2' |

7.RoHS Compliance

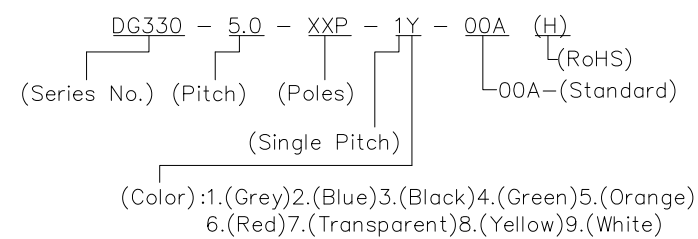

| | | | | | |
|----------------|-----------|---|--|-------------------------|-------|
| DETACHED LISTS | PART NO.: | / | | | |
| | APPD: | / | | | |
| | CHKD: | / | | | |
| | DRFT: | / | | | |
| | | 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | | | |
| | | NAME: | | DG330-5.0-XXP-1Y-00A(H) | |
| | | TITLE: | | CUSTOMER DRAWING | REV |
| | | DRAWING NO.: | | / | SHEET |
| | | THIRD ANGLE PROJECTION | | DO NOT SCALE DRAWING | SCALE |
| | | MM (INCH) | | 1/1 | 1:1 |