


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	LIN	05/05/08
△		增加VDE, UL, CE刻字	LJH	02/10/09

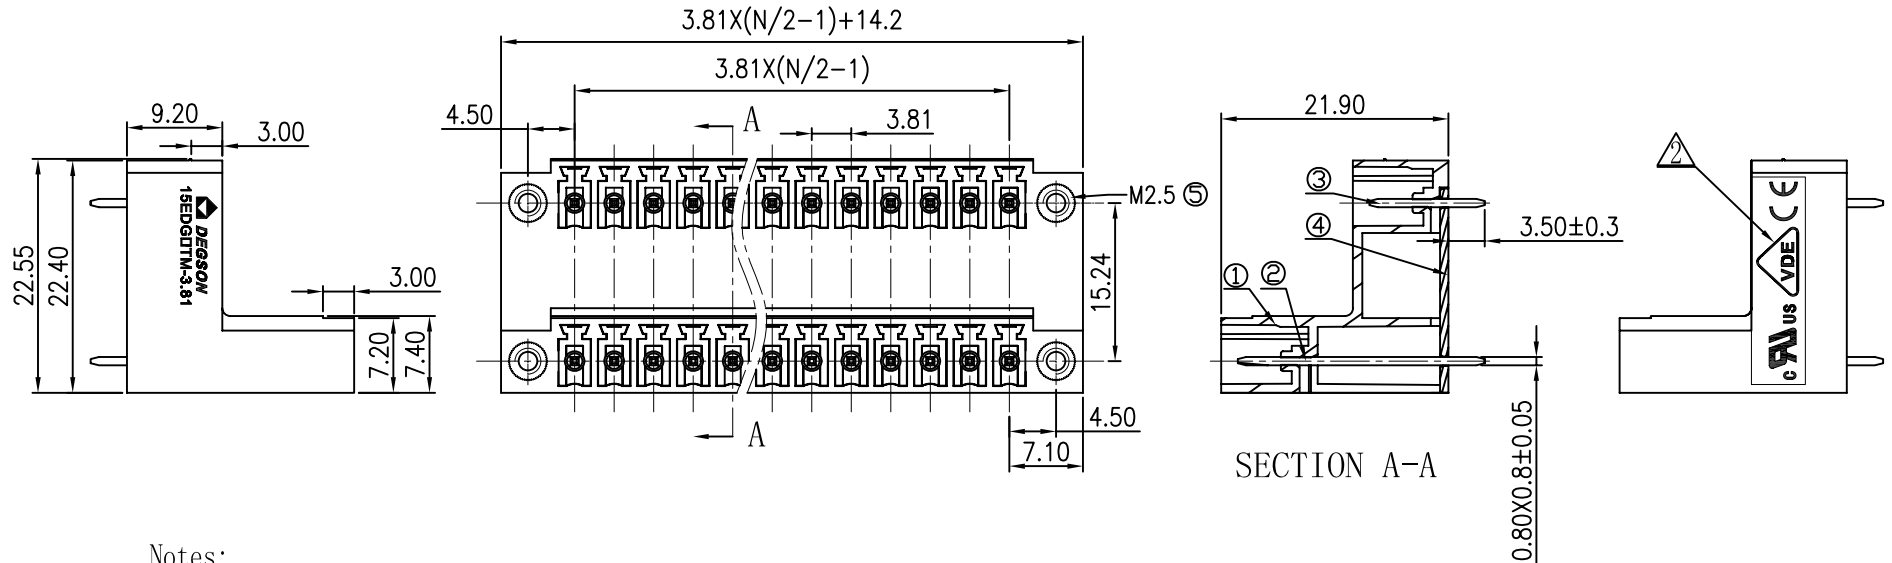

Notes:

1. Pitch: 3.81mm, Poles: 4-48P
2. Rated voltage/current: UL 300V/8A  
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC1500V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
	over 6	over 10	over 30	over 60	over 100	over 150		∩	
to 6	to 10	to 24	to 30	to 60	to 100	to 150		∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	2EDG-Screw cap	S00000040 (H)	4	Brass	
4	15EDGVT-Cover	1049COYXXA (H)	1	PA66	UL94V-0
3	15EDGV Pin	1002B00010 (H)	XX/2	Brass	SnCe
2	15EDGVH-Pin	1063B00030 (H)	XX/2	Brass	SnCe
1	15EDGVTM-Housing	1051AOYXXA (H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES												
<table border="1"> <tr> <td>MM (INCH)</td> <td>DFTO LIN</td> <td>DATE 07/24/07"</td> </tr> <tr> <td>TOLERANCES EXCEPT AS NOTED</td> <td>CHKD</td> <td>DATE</td> </tr> <tr> <td></td> <td>MFD</td> <td>DATE</td> </tr> <tr> <td></td> <td>APPVL</td> <td>DATE</td> </tr> </table>		MM (INCH)	DFTO LIN	DATE 07/24/07"	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		MFD	DATE		APPVL	DATE	<p style="text-align: center;"><b>DEGSON</b>® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</p>			
MM (INCH)	DFTO LIN	DATE 07/24/07"															
TOLERANCES EXCEPT AS NOTED	CHKD	DATE															
	MFD	DATE															
	APPVL	DATE															
DETACHED LISTS		NAME 15EDGVTM-3.81-XXP-1Y-00A(H)															
ANGLES ± 1°		G.E		DRAWING NO. 15EDGVTM-3.81-E01													
THIRD ANGLE PROJECTION		FINISH:		/PART NO.													
		SCALE: 1:1		DO NOT SCALE DRAWING													
				SHEET 1 OF 1													