

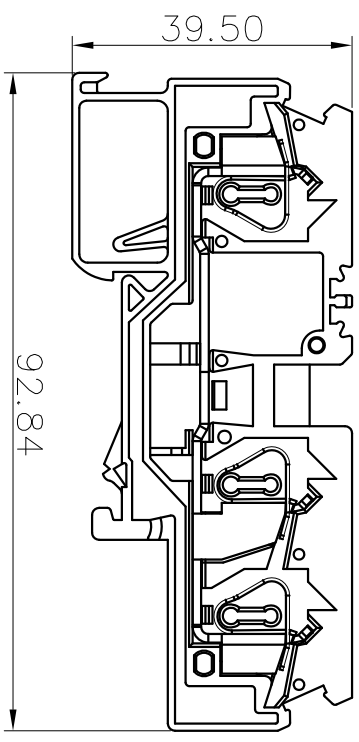
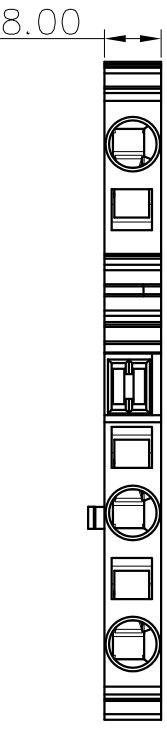


| REVISION RECORD | | | |
|-----------------|-----|-------------|-----------|
| REV | ECN | DESCRIPTION | DRFT DATE |
| | | | |

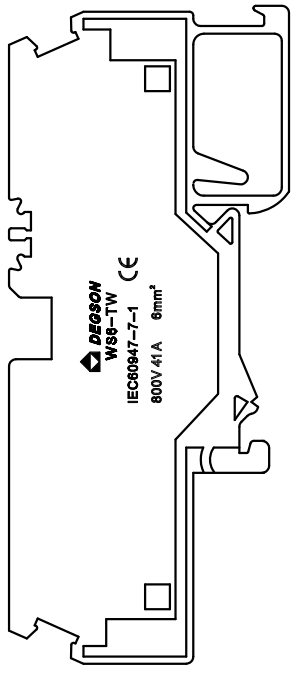

NOTES:
UL Standard

1. Rated voltage/current : 600V / 30A
2. Withstanding voltage : AC2200V/1Min.
3. Wire range : 24~10AWG

IEC Standard

| | |
|--------------------------|-------|
| 1. Pollution degree | 3 |
| Overvoltage category | III |
| Rate impulse voltage(KV) | 8.0KV |
| Rate voltage(V) | 800V |
| Rate current(A) | 41 A |


2. Wire range : 0.2~6mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 8.0mm, Poles : 01P
3. Stripping length : 13~14mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

| Pitch range | in mm | | Nominal dimension range | | - / Δ |
|-------------------|-------|-------|-------------------------|-------|--------|
| | mm | in | mm | mm | |
| 6 | Over | 10 | Over | Over | 0.1/10 |
| | TO | TO | TO | TO | |
| 10 | Over | 24 | Over | Over | ≤ |
| | TO | TO | TO | TO | |
| ±0.15/±0.20/±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 |
| | ±1.00 | ±1.30 | ±1.30 | ±1.30 | |

6. RoHS Compliance

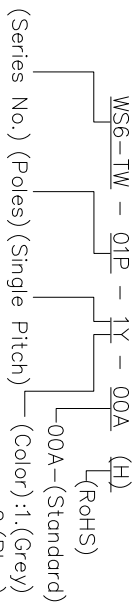

1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

| DETACHED LISTS | | | |
|------------------------|---|--------------|---|
| PART NO.: | / | NAME: | DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司 |
| APPD: | / | TITLE: | CUSTOMER DRAWING |
| CHKD: | / | DRAWING NO.: | / |
| DRFT: | / | REV | DO |
| THIRD ANGLE PROJECTION | | SHEET | 1/1 |
| | | SCALE | 1:1 |

A B C D E F G H

A B C D E F G H

8 7 6 5 4 3 2 1