

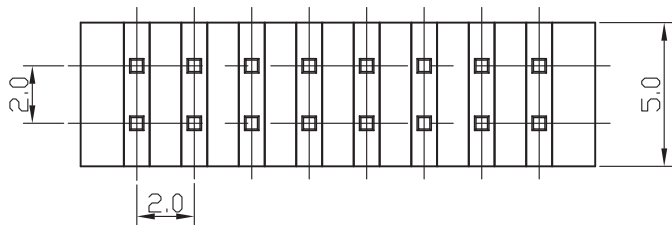


RECOMMENDED P.C. BOARD HOLE DIMM.

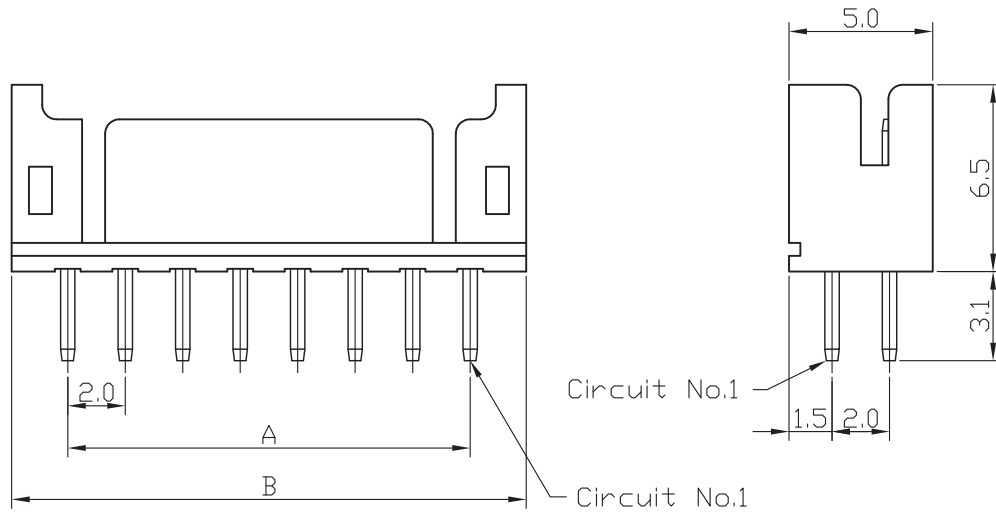

Specification

Current Rating: 3A AC DC  
 Voltage Rating: 250V AC, DC  
 Operating Temp: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Terminal Material: Brass/ Tin-plated/ Gold-plated  
 Material: Nylon 66, UL 94V-0

| Poles | Dimension mm (in.) |             | Note.   |
|-------|--------------------|-------------|---------|
|       | A                  | B           |         |
| 6     | 4.0(0.157)         | 7.9(0.311)  | PHD 06M |
| 8     | 6.0(0.236)         | 9.9(0.390)  | PHD 08M |
| 10    | 8.0(0.315)         | 11.9(0.469) | PHD 10M |
| 12    | 10.0(0.394)        | 13.9(0.547) | PHD 12M |
| 14    | 12.0(0.472)        | 15.9(0.626) | PHD 14M |
| 16    | 14.0(0.551)        | 17.9(0.705) | PHD 16M |
| 18    | 16.0(0.630)        | 19.9(0.783) | PHD 18M |
| 20    | 18.0(0.709)        | 21.9(0.862) | PHD 20M |
| 22    | 20.0(0.787)        | 23.9(0.941) | PHD 22M |
| 24    | 22.0(0.886)        | 25.9(1.020) | PHD 24M |
| 26    | 24.0(0.945)        | 27.9(1.098) | PHD 26M |
| 28    | 26.0(1.024)        | 29.9(1.177) | PHD 28M |
| 30    | 28.0(1.102)        | 31.9(1.256) | PHD 30M |
| 32    | 30.0(1.181)        | 33.9(1.335) | PHD 32M |

**RoHS Compliant**

TOLERANCES ARE

- X. ±
- .X ± 0.10
- .XX ± 0.05
- .XXX ±
- ANG ±

DESCRIPTION: 2.0mm Wire-to-Board Header 180° Dual Row Type