



color: green , black
pitch: 3.50/3.81 mm
certification: UL, CE, VDE, CQC
Type: male

MATERIAL:



- PIN HEADER : BRASS, TIN PLATED
- HOUSING : PA66, UL94V-0

ELECTRICAL:

- RATED VOLTAGE : 300V
- RATED CURRENT : 8A
- CONTACT RESISTANCE : 20mΩ
- INSULATION RESISTANCE : 5000MΩ/1000V
- WITHSTANDING VOLTAGE : AC1500V/1Min


MECHANICAL:

- TEMP.RANGE : -40°C... +105°C
- MAX SOLDREING : +250°C, FOR 5 SEC.

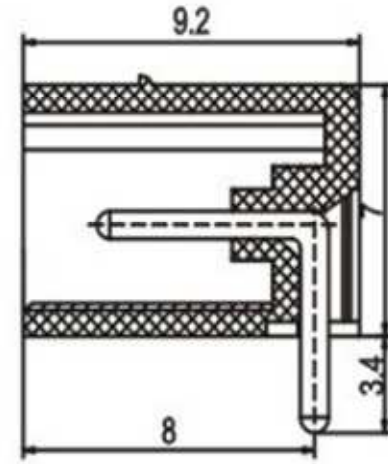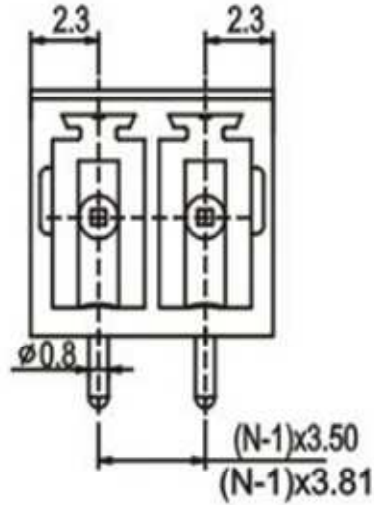

N=Number of contacts

P.C.B.LAYOUT

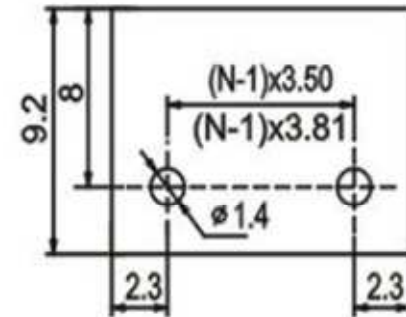

HOW TO ORDER

