

pitch: 5.08 mm

certification: UL, CE, VDE

### 1. Material:


- Pin header: Brass, Tin-Plated
- Housing : PA66, UL94V-0

### 2. Electrical:

- Rated voltage : 150V
- Rated current : 8A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding voltage: AC1500V/1Min
- Wire range: 26 -20 1.5mm<sup>2</sup>

### 3. Mechanical:

- Temp. range: -40℃...+105℃
- MAX soldering : +250℃, For 5 Sec

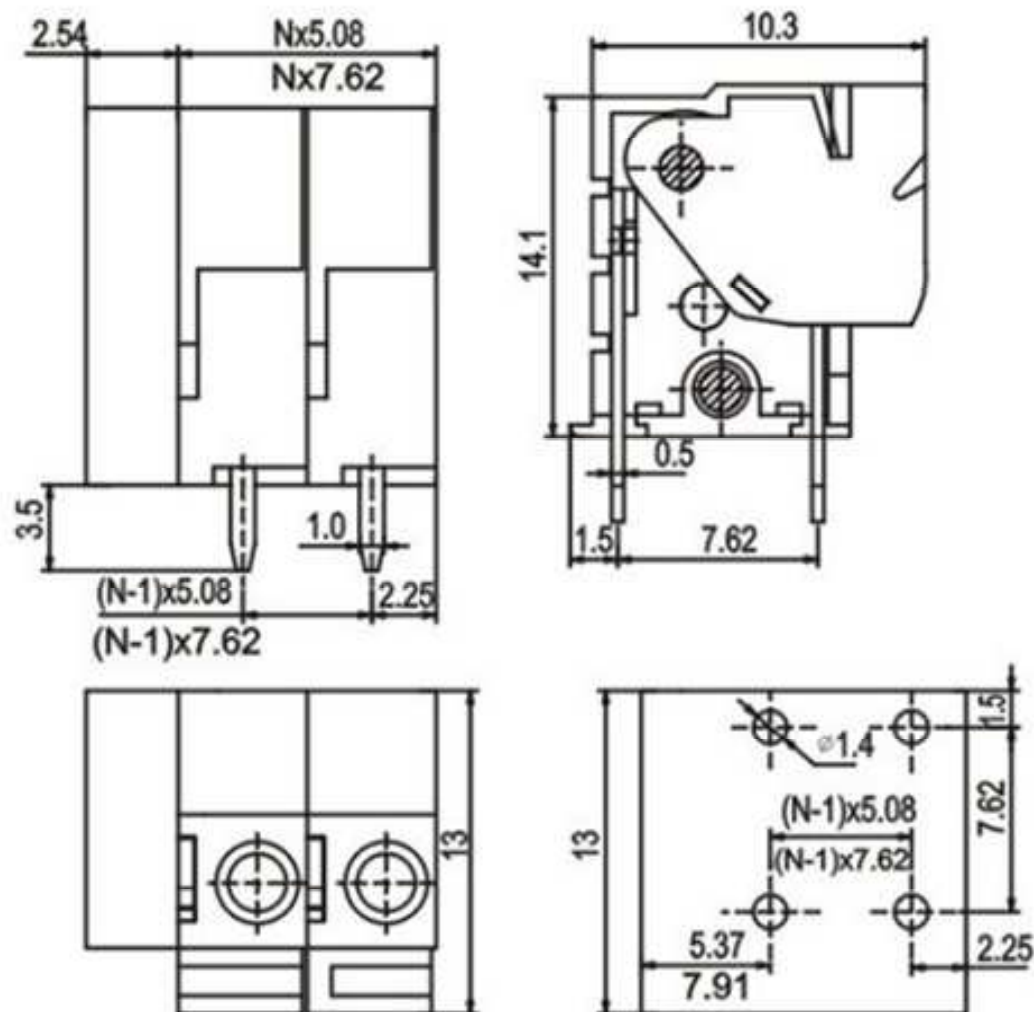

### HOW TO ORDER

