

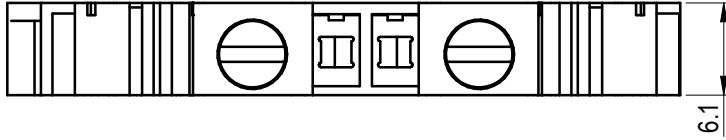
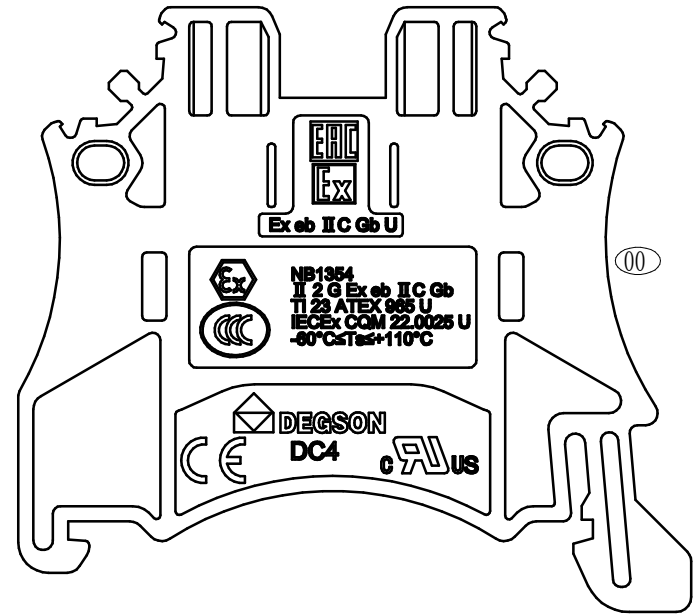


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent. 未经授权复制或传播本文件中的任何内容，或在本文件中使用、复制或传播其中的任何内容，均属于侵权行为。本公司保留对本文件的所有权利。

未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

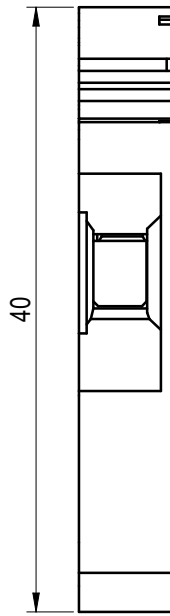

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600V/30	600V/30	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	1000/32	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.65/6		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	24- 10/ 0.2- 6(scl&str)		
剥线长度/Stripping length(mm)	8- 9		
使用温度范围/Operating temperature(°C)	-40- +105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

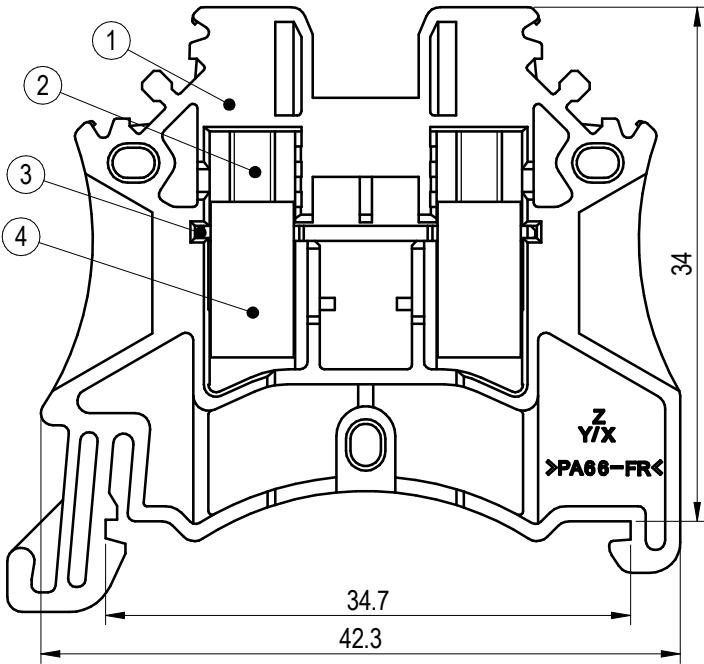

4	Cage	Copper alloy	Ni plated
3	Current carrier	Copper	Sn Plated
2	Screw	Copper alloy	Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:	SURFACE/COLOR:	
APPD: Peng M 2024.01.30		MAT NO./REV: 11020000272-1 / 00		MAT STATUS: 设计放行
CHKD: Gao WG 2024.01.30		NAME		
DRFT: Deng L 2024.01.30		DC4-Cu-01P-11-00A(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200268702	CUSTOMER DRAWING	已发布	2:1	1/1

00		Add explosion-proof certification lettering	Deng L	2024.01.30
REV	ECN	DESCRIPTION	DRFT	DATE