

## DETAILS

|                        |                  |
|------------------------|------------------|
| <b>Product Number</b>  | FA10300_OSS-D    |
| <b>Family</b>          | Rose             |
| <b>Type</b>            | Assembly         |
| <b>Color</b>           | white            |
| <b>Diameter</b>        | 21,6 + 21,6 mm   |
| <b>Height</b>          | 13,9 mm          |
| <b>Style</b>           | square           |
| <b>Optic Material</b>  | PC               |
| <b>Holder Material</b> |                  |
| <b>Fastening</b>       | tape             |
| <b>Status</b>          | production ready |
| <b>ROHS Compliant</b>  | Yes              |
| <b>Date Updated</b>    | 26/06/2013       |




## OPTICAL PROPERTIES

| LED            | Viewing Angle | Light Beam | Efficiency | cd/lm  | Connector |
|----------------|---------------|------------|------------|--------|-----------|
| Golden Dragon+ | 11 deg        | Diffuser   | 87 %       | 12.700 | -         |

# Ledil Oy FA10300\_OSS-D FA10300\_OSS-D / LDC (Linear)


Luminaire: Ledil Oy FA10300\_OSS-D FA10300\_OSS-D  
Lamps: 1 x OSRAM-OS GOLDEN DRAGON+ (white)

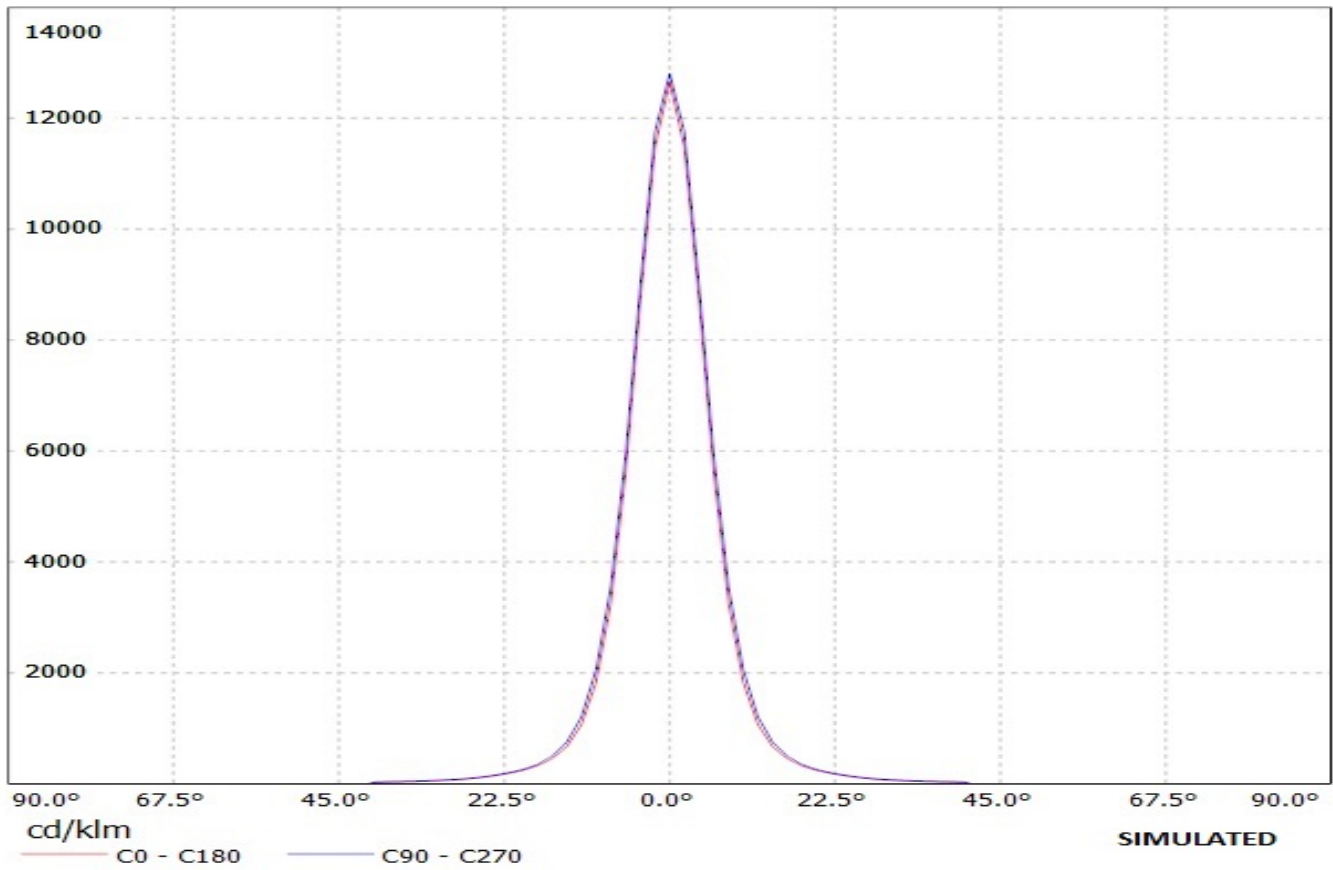

# Ledil Oy FA10300\_OSS-D FA10300\_OSS-D / LDC (Polar)

Luminaire: Ledil Oy FA10300\_OSS-D FA10300\_OSS-D

Lamps: 1 x OSRAM-OS GOLDEN DRAGON+ (white)

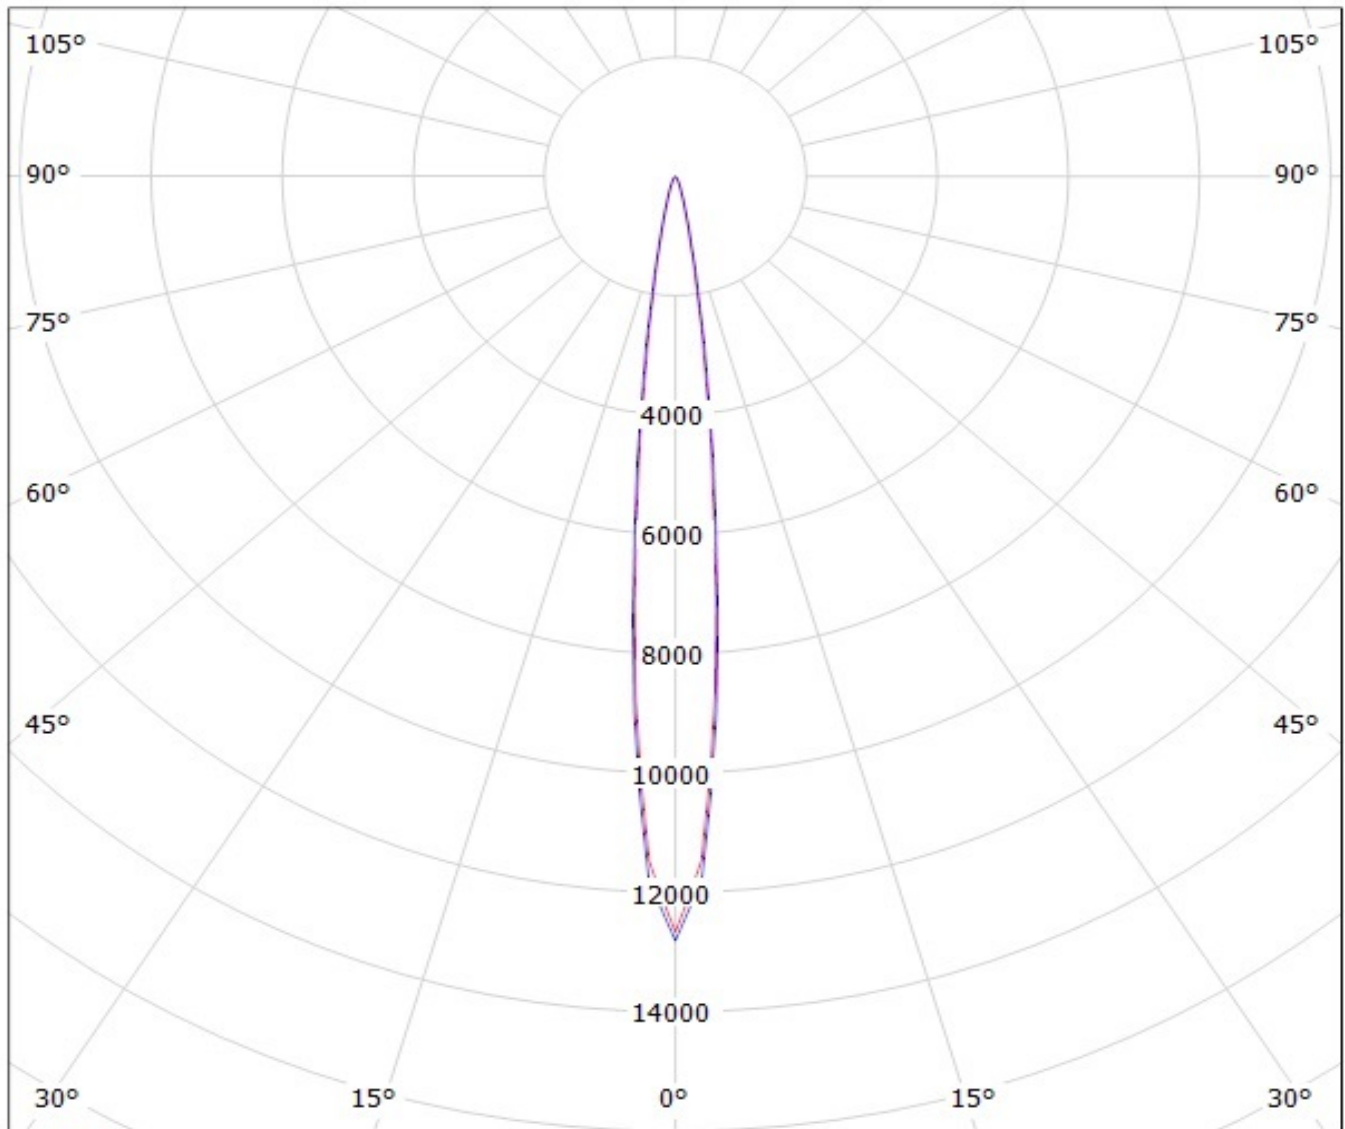

cd/klm

— C0 - C180

— C90 - C270

**SIMULATED**

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**