

1 2 3 4 5 6 7 8

A





B

C

D

E

F

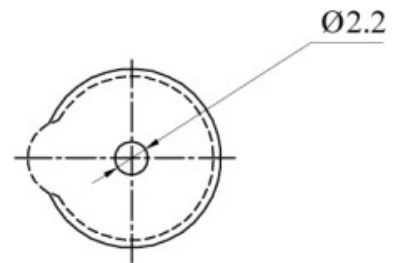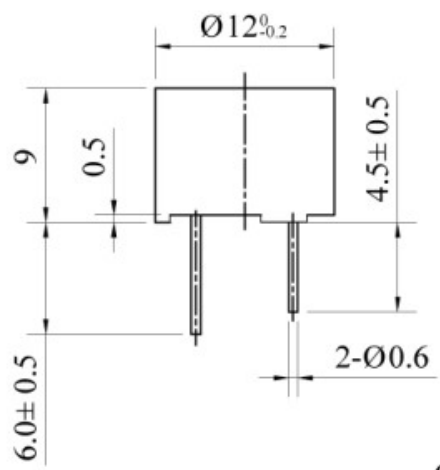

# SPECIFICATION

- 1. Rated Voltage ..... 12 V
- 2. Operating Voltage ..... 8~16 V
- 3. Max. Rated Current ..... 40mA
- 4. Coil Resistance ..... 140 ± 14 Ω
- 5. Coil Impedance ..... 240 Ω
- 6. Min. Sound Pressure Level ..... 85dB/10cm
- 7. Resonant Frequency ..... 2400Hz
- 8. Case Material ..... PBT
- 9. Operating Temperature ..... -20~+70°C
- 10. Store Temperature ..... -30~+80°C
- 11. Weight ..... 2g



|   |  |             |          |          |                              |         |
|---|--|-------------|----------|----------|------------------------------|---------|
| No.   |  | DESCRIPTION | APPROVED | DATE     | Magnetic Buzzer<br>KPM-1212A |         |
| TOLERANCES UNLESS NOTED OTHERWISE<br>X .XX +<br>XX ±<br>XXX - |  | APPROVALS   | DATE     | UNIT     |                              |         |
| 90° FORBID -2°<br>ANGLES -1°                                  |  | DRAWN       |          |          | mm                           |         |
| FIRST ANGLE PROJECTION  |  | CHECKED     |          |          | SCALE                        | SHEET   |
|   |  | APPROVED    |          | 05.03.08 | NOT TO SCALE                 | VER 1.2 |

1 2 3 4 5 6 7 8