

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/16'		
B				

NOTES:




1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Contact material: Copper Alloy
- . Rated voltage: 125V
- . Rated current: 1.5A
- . Contact resistance:  $\leq 30m\Omega$
- . Insulation resistance:  $\geq 100M\Omega$
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range:  $-25 \sim +85^{\circ}C$
- . Recommend PC board thickness:1.2mm

2. PRODUCT NUMBER CODE:

DS1066-07 - X X X X X

- Contact Plating  
6: Tin
- Housing Color  
W: White
- Mounting type  
V: V/T type
- Connector type  
M: Male
- No.of contact  
2 to 15

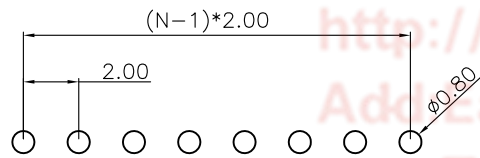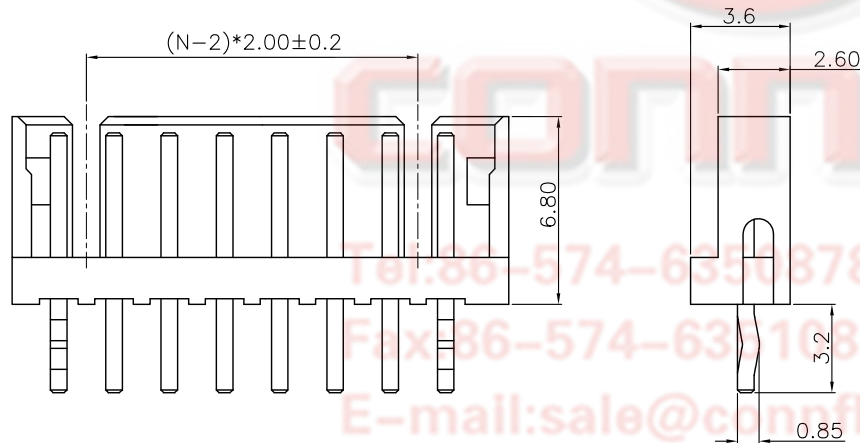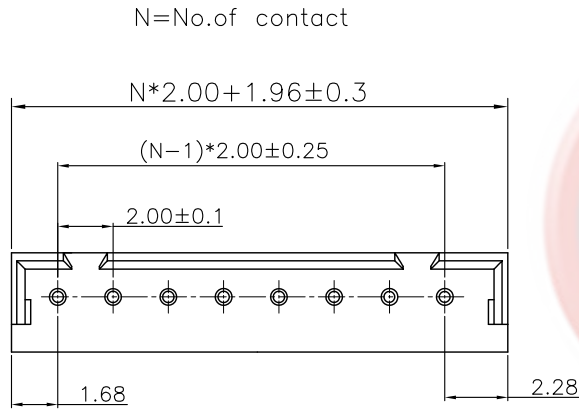

Recommend PCB Layout

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	2.00mm Wafer V/T Type Housing Crimp Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1066-07 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C-DS1066-07-XXXXXXX-A		

晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**