
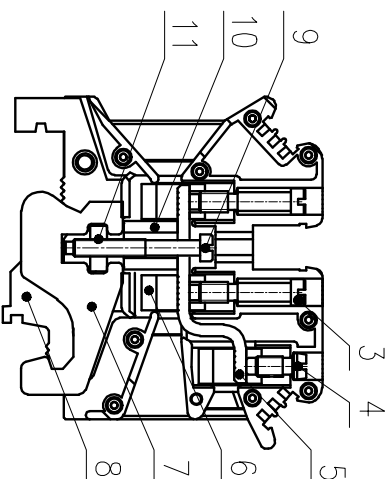
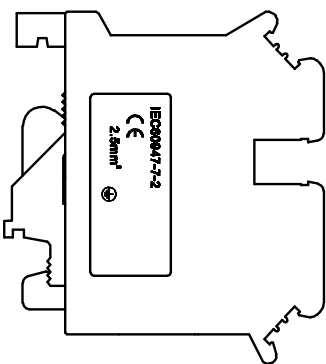

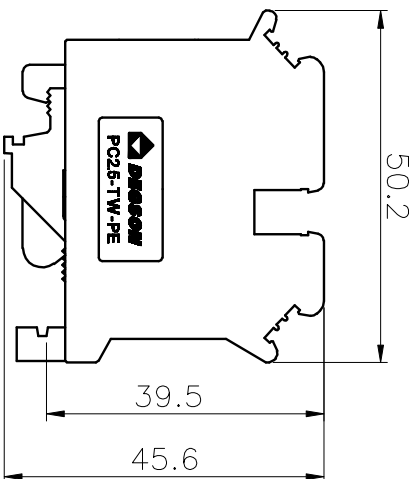


5.2



Yellow

Green

公差/General Tolerances(mm)		公差/General Tolerances(mm)										公差/General Tolerances(mm)	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

ITEM	NAME OF PART	MATERIAL	NOTES
11	Abnormity nut	Copper alloy	M2.5/Ni plated
10	Bar copper	Copper alloy	Ni plated
9	Adjusting bolt	Copper alloy	M2.5/Ni plated
8	Securing fitting	Copper alloy	Ni plated
7	Slip component	steel	Zn plated
6	Cage	Copper alloy	M3/Ni plated
5	Current carrier	Copper	Sn plated
4	Screw 2	Copper alloy	M3/Ni plated
3	Screw 1	Copper alloy	M3/Ni plated
2	Housing 2	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1	2	3	4	5

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: Li GL 2020.04.02	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Moo J 2020.04.02	PC2.5-TW-PE-01P-1Y-00A(H)
DRAFT:Wang LX 2020.04.02	DRAWING NO.: PC2.5-TW-PE-C01
TYPE: CUSTOMER DRAWING	SCALE: 2:1
	REV T1
	1/1

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/特类等	III/3	/	/
级 /Pollution Degree	/	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	4.0	/	/
额定扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5/24~14		
间距/Pitch(mm)	5.2		
剥线长度/Stripping length(mm)	7-8		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:			
PANTONE / RAL	/		