

HFBR-1506AMZ/HFBR-2506AMZ

Fiber Optic SMA Transmitters and Receivers for 16 MBd SERCOS Applications



Data Sheet



Description

SERCOS, an acronym for **S**ERial **R**ealtime **C**ommunications **S**ystems, is a standard digital interface for communication in industrial CNC applications. SERCOS is a European (EN 61491) and international standard (IEC 61491). The optical interface allows data rates of 2,4,8 and 16 MBd and data transfer between numerical controls and drives via fiber-optic rings, with voltage isolation and noise immunity. The HFBR-1506AMZ and HFBR-2506AMZ products have a guaranteed performance up to 16 MBd.

Features

- RoHS-Compliant
- Meets Industrial SERCOS 16MBd standard
- SMA ports
- 650 nm wavelength
- Metal coated, plastic packaging
- Specified for use with 1 mm POF and 200 μ m HCS
- DC - 16 MBd data rate

Applications

- Industrial Control Data Links
- Factory Automation Data Links
- Voltage Isolation Applications

Package Information

The RoHS-compliant transmitters and receivers are housed in a low-cost, dual-in-line package that is made of high strength, heat resistant, chemically resistant and UL 94V-O (UL file # E121562) flame retardant plastic. Both the transmitter and receiver are coated with a layer of conductive alloy for better air discharge (ESD) performance. The package is designed for auto insertion and wave soldering so it is ideal for high volume production applications.

Handling and Design Information

When soldering, it is advisable to leave the protective cap on the unit to keep the optics clean. Good system performance requires clean port optics and cable ferrules to avoid obstructing the optical path. Clean compressed air often is sufficient to remove particles of dirt; methanol on a cotton swab also works well.

Recommended Chemicals for Cleaning/Degreasing

Alcohols: methyl, isopropyl, isobutyl.

Aliphatics: hexane, heptane.

Other: soap solution, naphtha.

Do not use partially halogenated hydrocarbons such as 1,1,1 trichloroethane, ketones such as MEK, acetone, chloroform, ethyl acetate, methylene dichloride, phenol, methylene chloride or N-methylpyrrolidone. Also, Avago Technologies does not recommend the use of cleaners that use halogenated hydrocarbons because of their potential environmental harm.

CAUTION: The small junction size inherent in the design of these components increases the components' susceptibility to damage from electrostatic discharge (ESD). It is advised that normal static precautions be taken in handling and assembly of these components to prevent damage and/or degradation which may be induced by ESD.

Link Performance Specification

0 °C to +70 °C unless otherwise noted.

| Parameter | Symbol | Min | Max | Unit | Condition | Reference |
|---|--------|-----|-----|------|-----------|-----------------|
| Link distance with HFBR-1506AMZ/2506AMZ | l | 0.1 | 45 | m | POF | Note 1, 2, 4, 6 |
| | | 0.1 | 200 | m | HCS | Note 1, 3, 5, 6 |

Notes:

1. 60 mA nominal drive current.
2. POF HFBR-ExxyyyZ 0.23 dB/m worst case attenuation.
3. HCS 10 dB/km worst case attenuation.
4. Including a 3 dB optical safety margin accounting for link service lifetime.
5. Including a 2 dB optical safety margin accounting for link service lifetime.
6. Signaling rate dc to 16 MBd.

HFBR-1506AMZ Transmitter

The HFBR-1506AMZ transmitter incorporates a 650nm LED in a metal-coated, plastic housing. The high light output power enables the use of both plastic optical fiber (POF) and Hard Clad Silica (HCS). This transmitter can operate up to 16MBd using a simple driver circuit. The HFBR-1506AMZ is compatible with SMA connectors.

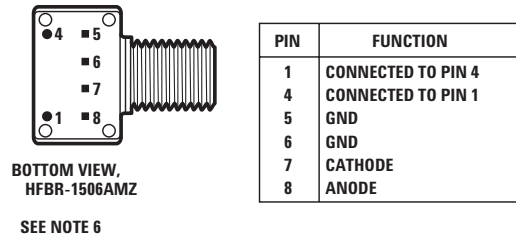


Figure 1.

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit | Notes |
|-----------------------------------|--------------|-----|-----|------|-------|
| Storage and Operating Temperature | $T_{S, O}$ | -40 | +85 | °C | |
| Peak Forward Input Current | $I_{F, PK}$ | | 90 | mA | 1 |
| Average Forward Input Current | $I_{F, AVG}$ | | 60 | mA | |
| Reverse Input Voltage | V_R | | 3 | V | |
| Lead Soldering Cycle | | | | | |
| Temp | T_{SOL} | | 260 | °C | 2, 8 |
| Time | T_{SOL} | | 10 | s | |

Electrical Characteristics Table

0 °C to +70 °C unless otherwise noted.

| Parameter | Symbol | Min | Typ ¹ | Max | Unit | Condition | Notes |
|---|-------------------------|-----|------------------|------|-------|--|------------|
| Optical Power Temperature Coefficient | $\Delta P_T / \Delta T$ | | -0.02 | | dB/°C | | |
| Forward Voltage | V_F | 1.8 | 2.1 | 2.65 | V | $I_{F, dc} = 60 \text{ mA}$ | Figure 2 |
| Forward Voltage Temperature Coefficient | $\Delta V_F / \Delta T$ | | -1.8 | | mV/°C | | Figure 2 |
| Breakdown Voltage | V_{BR} | 3.0 | 13 | | V | $I_{F, dc} = -10 \mu\text{A}$ | |
| Peak Emission Wavelength | λ_{PK} | 640 | 650 | 660 | nm | | Figure 4 |
| Full Width Half Max | FWHM | | 21 | 30 | nm | | Figure 4 |
| Diode Capacitance | C_O | | 60 | | pF | $V_F = 0 \text{ V}, f = 1 \text{ MHz}$ | |
| Thermal Resistance | θ_{JC} | | 140 | | °C/W | | Notes 4, 5 |
| Rise Time (10% to 90%) | t_r | | | 15 | ns | 10% to 90% | Figure 6 |
| Fall Time (90% to 10%) | t_f | | | 15 | ns | $I_F = 60 \text{ mA}$ | Figure 6 |

Peak Output Power

0 °C to +70 °C unless otherwise noted.

| Model Number | Symbol | Min | Max | Unit | Condition | Reference |
|--------------|--------|-------|-------|------|--|-----------|
| HFBR-1506AMZ | P_r | -6.0 | -2.0 | dBm | POF, $I_{F, dc} = 60 \text{ mA}$ | Note 7 |
| | | -18.0 | -10.0 | | HCS [®] , $I_{F, dc} = 60 \text{ mA}$ | Figure 3 |

Notes:

- For $I_{F, PK} > 60 \text{ mA}$, the duty factor must maintain $I_{F, AVG} \leq 60 \text{ mA}$ and pulse width $\leq 1 \mu\text{s}$.
- 1.6 mm below seating plane.
- Typical data are at +25 °C
- Thermal resistance is measured with the transmitter coupled to a connector assembly and fiber, and mounted on a printed circuit board.
- To further reduce the thermal resistance, the cathode trace should be made as large as is consistent with good RF circuit design.
- Pins 1 and 4 are for mounting and retaining purposes, but are electrically connected, pins 5 and 6 are electrically isolated. It is recommended that pins 1, 4, 5 and 6 all be connected to ground to reduce coupling of electrical noise.
- Optical power measured at the end of 1 meters of 1 mm diameter plastic or 200 μm hard/plastic clad silica optical fiber with a large area detector.
- Moisture sensitivity level (MSL) is 3.

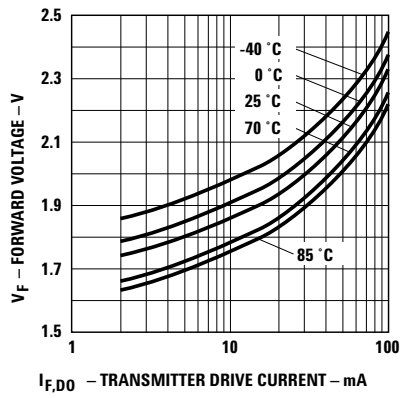


Figure 2. Typical Forward Voltage vs Drive Current

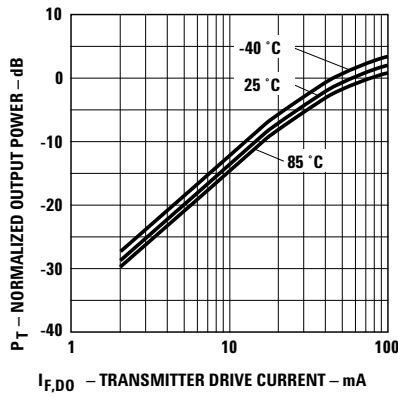


Figure 3. Typical Normalized Optical Power vs Drive Current

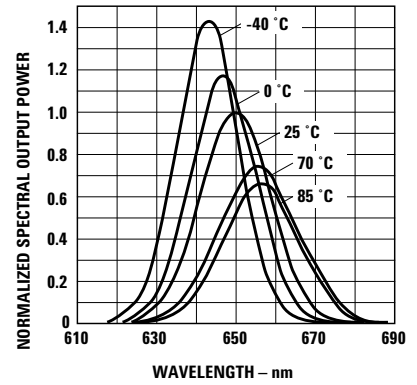


Figure 4. Typical Normalized Optical Spectra

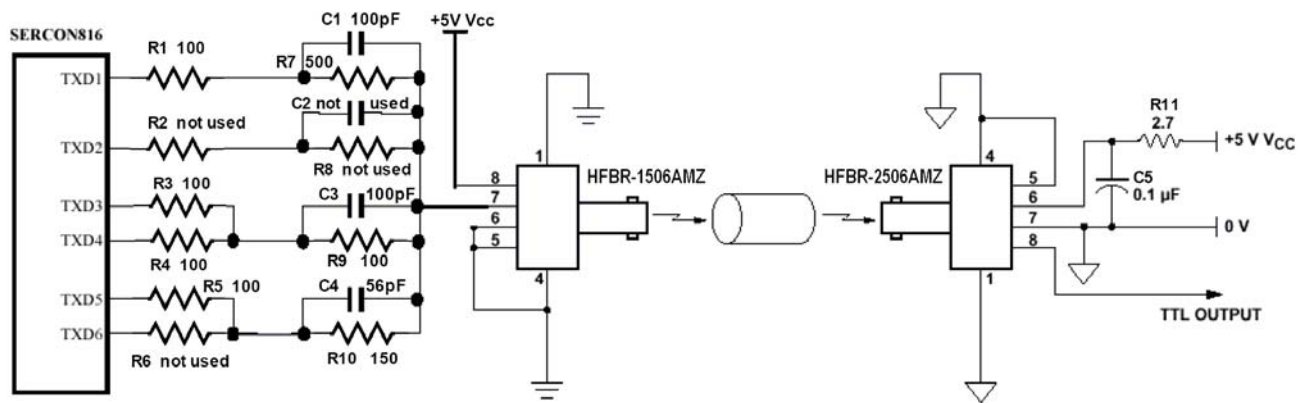


Figure 5. Recommended drive circuit according to SERCOS An17 ($I_{f, nom} \sim 35 \text{ mA}$)

HFBR-2506AMZ Receiver

The HFBR-2506AMZ receiver is housed in a metal-coated, plastic package, consists of a silicon PIN photodiode and digitizing IC to produce a logic compatible output. The IC includes a unique circuit to correct the pulse width distortion of the first bit after a long idle period. This enables operation from DC to 16MBd with low PWD for arbitrary data patterns.

The receiver is a “push-pull” stage compatible with TTL and CMOS logic. The HFBR-2506AMZ is compatible with SMA connectors.

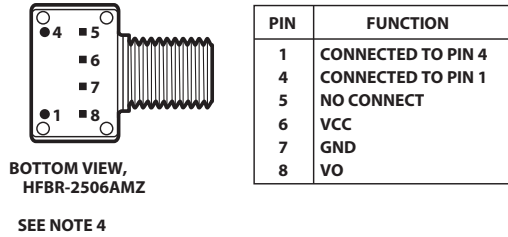


Figure 6.

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit | Notes |
|-----------------------------------|--------------|------|-----|------|-------|
| Storage and Operating Temperature | $T_{S, O}$ | -40 | +85 | °C | |
| Supply Voltage | V_{CC} | -0.5 | 5.5 | V | |
| Average Output Current | $I_{O, AVG}$ | | 16 | mA | |
| Output Power Dissipation | P_{OD} | | 80 | mW | |
| Lead Soldering Cycle Temp | T_{SOL} | | 260 | °C | 1, 5 |
| Time | T_{SOL} | | 10 | s | |

Electrical Characteristics Table

0 °C to +70 °C °C, 4.75 V < V_{CC} < 5.25 V, V_{P-P} Noise < = 100 mV unless otherwise noted.

| Parameter | Symbol | Min | Typ ¹ | Max | Unit | Condition | Notes |
|-----------------------------------|------------------------|------------|------------------|------------|------|--|-------|
| Peak Input Power Level Logic HIGH | P_{RH} | | | -42 -44 | dBm | 1 mm POF 200 μ m HCS | |
| Peak Input Power Level Logic LOW | P_{RL} | -20 -22 | | -2 -10 | dBm | 1 mm POF 200 μ m HCS PWD < 19 ns | 3 |
| Supply Current | I_{CC} | | 27 | 45 | mA | V_O = Open | |
| High Level Output Voltage | V_{OH} | 4.2 | 4.7 | | V | I_O = 40 μ A | |
| Low Level Output Voltage | V_{OH} | | 0.22 | 0.4 | V | I_O = 1.6 mA | |
| Pulse Width Distortion | PWD | -19 | | 19 | ns | | |
| Propagation Delay Time | T_{P_HL} or $_{LH}$ | | | 150 | ns | | |

Notes:

- 1.6 mm below seating plane.
- Typical data are at +25 °C, V_{CC} = 5.0 V
- BER < = 10E-9, includes a 10.8 dB margin below the receiver switching threshold level (signal to noise ratio =12)
- Pins 1 and 4 are electrically connected to the metal coated housing and are also used for mounting and retaining purposes. It is recommended that pins 1 and 4 to be connected to ground to maintain housing shield effectiveness.
- Moisture sensitivity level (MSL) is 3.

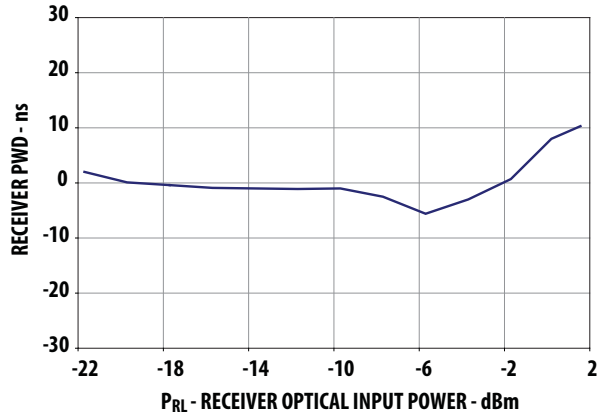


Figure 7. Typical POF receiver pulse width distortion vs optical power


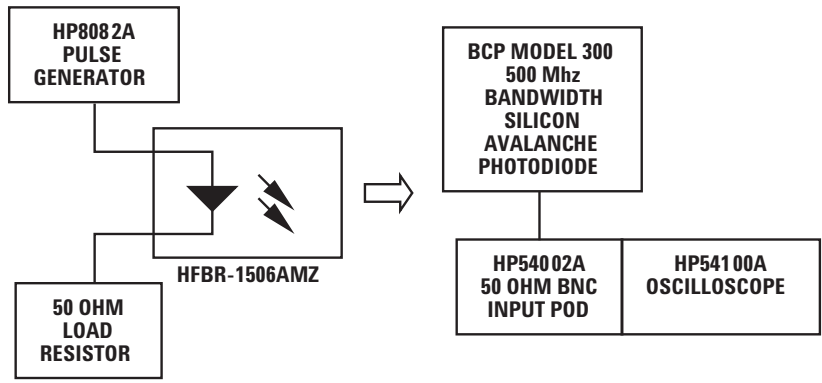


Figure 8. Test Circuit for Measuring Unpeaked Rise and Fall Times

Mechanical Dimensions

HFBR-1506AMZ/HFBR-2506AMZ

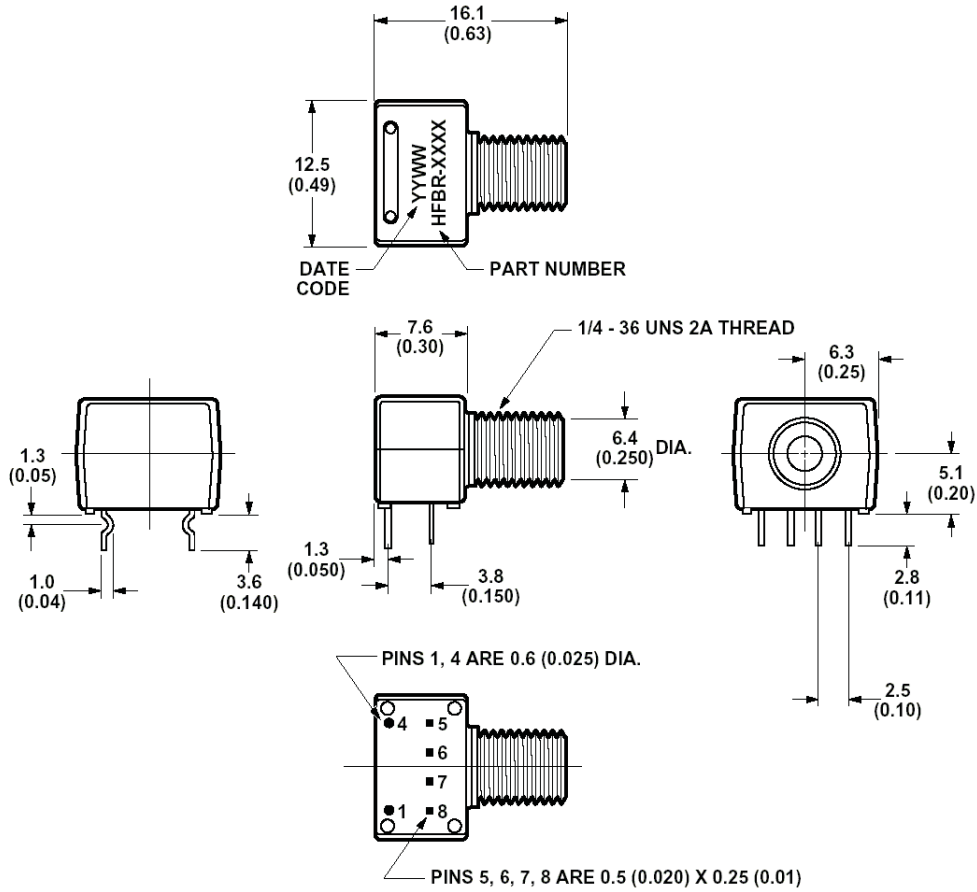

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2011 Avago Technologies. All rights reserved. Obsoletes AV01-0302EN AV02-1507EN - November 4, 2011

Avago
TECHNOLOGIES