



ISO9001 & ISO14001 & TS16949 **CHILISIN ELECTRONICS CORP.**

**Lead-Free & RoHs Compliance!!**

## SPECIFICATION FOR APPROVAL

**CUSTOMER :** \_\_\_\_\_

**CUSTOMER P/N :** \_\_\_\_\_

**OUR DWG No :** **CE1-361017**

**QUANTITY :** **X Pcs.**     **DATE :** **2013/7/3**

**ITEM :** **NLV322522T-SERIES-N**

<b>SPECIFICATION ACCEPTED BY:</b>	
<b>COMPONENT ENGINEER</b>	
<b>ELECTRICAL ENGINEER</b>	
<b>MECHANICAL ENGINEER</b>	
<b>APPROVED</b>	
<b>REJECTED</b>	

奇力新電子股份有限公司  
 CHILISIN ELECTRONICS CORP.  
 NO.29,LANE 301,TEHHSIN ROAD,HUKOU,  
 HSINCHU,TAIWAN,303,  
 REPUBLIC OF CHINA  
 TEL : (03) 599-2646  
 FAX : (03) 599-9176  
 E-mail : Sales@chilisin.com.tw  
 http : //www.chilisin.com.tw  
**台北營業處**  
 TAIPEI OFFICE  
 3F,NO.233-1,PAO-CHIAO ROAD,  
 HSIN TIEN,TAIPEI,TAIWAN, R.O.C.  
 TEL : (02)29112073  
 FAX : (02)29147698  
 E-mail : Sales@chilisin.com.tw

東莞奇力新電子有限公司  
 DONG GUANG CHILISIN ELECTRONICS LTD.  
 YULIANGWEI ADMINISTRATION AREA,  
 QINGXI TOWN, DONGGUANG, GUANGDONG,  
 CHINA  
 TEL : 00286769-7730251-3  
 FAX : 00286769-7730232  
 E-mail : cect@chilisin.com.tw  
**奇力新電子(蘇州)有限公司**  
 CHILISIN ELECTRONICS(SUZHOU)CO.,LTD  
 NO.10, Zhu Yuan Road, Suzhou New District,  
 Suzhou,P.R.C.  
 TEL : 00286512-8255568  
 FAX : 00286512-8255568  
 E-mail : suzhou@chilisin.com.tw

**DRAWN BY  
ANNIE**


**CHECKED BY  
ANNIE**

**APPROVED BY  
唐威德**

# NL322522T Series Specification

**1** Scope: This specification applies to Wire Wound Ferrite Chip Inductors

**2** Part Numbering: Product Identification

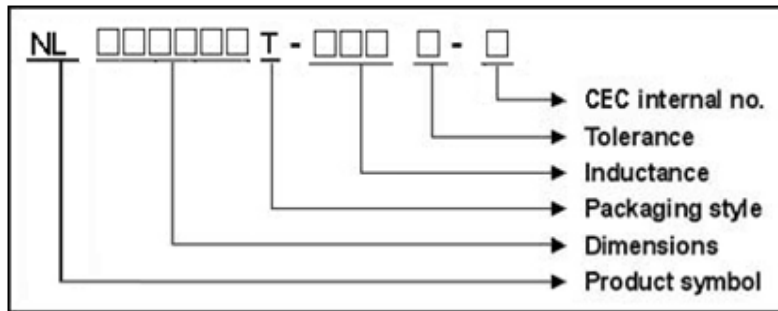


**3** Rating:

Operating Temperature:  $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$  (Including self - temperature rise)

Storage Temperature:  $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$

**4** Marking:



**EX: NL322522T-100K-N**

**Marking : 100**


**5** Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20±2°C
Humidity	Ordinary Humidity(25 to 85% RH)	60 to 70 % RH



# NL322522T Series Specification

## 6 Configuration and Dimensions:

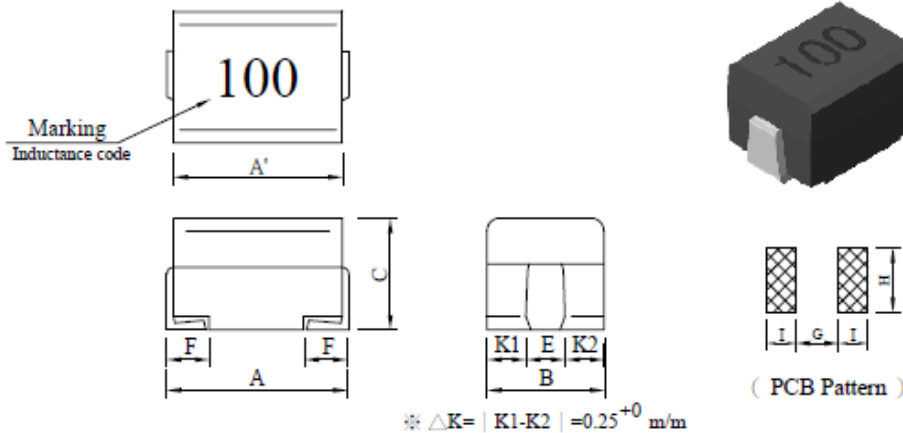

Unit : m/m

A	A'	B	C	E	F	G	H	I
3.20 ±0.4	2.90 ±0.2	2.50 ±0.2	2.20 ±0.2	1.00 ±0.2	0.60 $^{+0.3}_0$	1.80	1.40	1.00

## 7 ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (uH)	Test Freq. (MHZ)	Q Min	SRF (MHZ)Min.	RDC (Ω)Max.	Rated	Tolerance (±%)
						Current (mA)Max.	
NLV322522T-R12□-N	0.12	25.2	30	500	0.22	450	20
NLV322522T-R15□-N	0.15	25.2	30	450	0.25	450	20
NLV322522T-R18□-N	0.18	25.2	30	400	0.28	450	20
NLV322522T-R22□-N	0.22	25.2	30	350	0.32	450	20
NLV322522T-R27□-N	0.27	25.2	30	320	0.36	450	20
NLV322522T-R33□-N	0.33	25.2	30	300	0.4	450	20
NLV322522T-R39□-N	0.39	25.2	30	250	0.45	450	20
NLV322522T-R47□-N	0.47	25.2	30	220	0.5	450	20
NLV322522T-R56□-N	0.56	25.2	30	180	0.55	450	20
NLV322522T-R68□-N	0.68	25.2	30	160	0.6	450	20
NLV322522T-R82□-N	0.82	25.2	30	140	0.65	450	20
NLV322522T-1R0□-N	1.0	7.96	30	120	0.7	400	10,20
NLV322522T-1R2□-N	1.2	7.96	30	100	0.75	390	10,20
NLV322522T-1R5□-N	1.5	7.96	30	85	0.85	370	10,20
NLV322522T-1R8□-N	1.8	7.96	30	80	0.9	350	10,20
NLV322522T-2R2□-N	2.2	7.96	30	75	1.0	320	10,20
NLV322522T-2R7□-N	2.7	7.96	30	70	1.1	290	10,20
NLV322522T-3R3□-N	3.3	7.96	30	60	1.2	260	10,20
NLV322522T-3R9□-N	3.9	7.96	30	55	1.3	250	10,20
NLV322522T-4R7□-N	4.7	7.96	30	50	1.5	220	10,20
NLV322522T-5R6□-N	5.6	7.96	30	45	1.6	200	10,20
NLV322522T-6R8□-N	6.8	7.96	30	40	1.8	180	10,20
NLV322522T-8R2□-N	8.2	7.96	30	35	2	170	10,20
NLV322522T-100□-N	10	2.52	30	30	2.1	150	10,20

**NOTE:** □-tolerance J=±5% / K=±10% / M=±20%

1. Operating temperature range -40°C ~ 125°C

2. Rated Current : Current cause Inductance drop within 10%

"-N" FOR COMPLETELY LEAD FREE TYPE(INCLUDING FERRITE BODY &amp; SOLDER)




# NL322522T Series Specification

Part No.	Inductance (uH)	L,Q Test Freq. (MHZ)	Q Min.	SRF (MHZ)Min.	RDC (Ω)Max.	Rated Current (mA)Max.	Tolerance (±%)
NLV322522T-120□-N	12	2.52	30	20	2.5	140	10,20
NLV322522T-150□-N	15	2.52	30	20	2.8	130	10,20
NLV322522T-180□-N	18	2.52	30	20	3.3	120	10,20
NLV322522T-220□-N	22	2.52	30	20	3.7	110	10,20
NLV322522T-270□-N	27	2.52	30	20	5	80	10,20
NLV322522T-330□-N	33	2.52	30	17	5.6	70	10,20
NLV322522T-390□-N	39	2.52	30	16	6.4	65	10,20
NLV322522T-470□-N	47	2.52	30	15	7	60	10,20
NLV322522T-560□-N	56	2.52	30	13	8	55	10,20
NLV322522T-680□-N	68	2.52	30	12	9	50	10,20
NLV322522T-820□-N	82	2.52	30	11	10	45	10,20
NLV322522T-101□-N	100	0.796	20	10	11	40	10,20
NLV322522T-121□-N	120	0.796	20	10	11	70	10,20
NLV322522T-151□-N	150	0.796	20	8	15	65	10,20

## NL322522T Series Specification

### 8 NL322522T Series

#### 8.1 Construction:

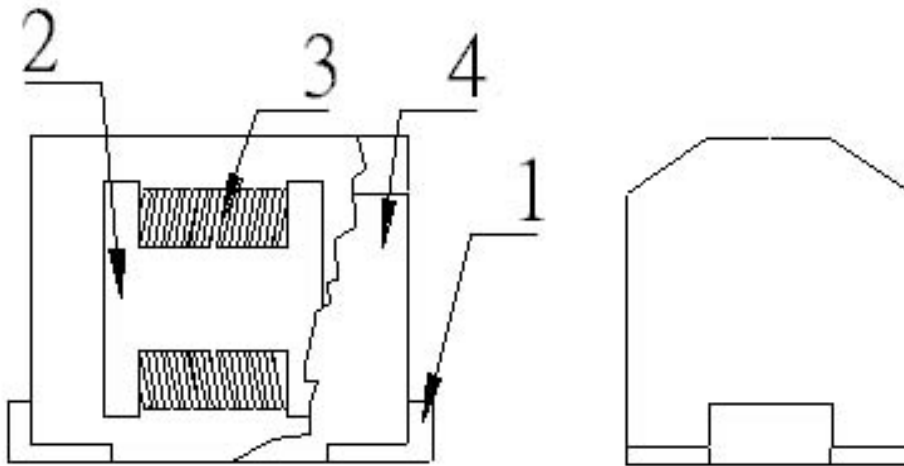

#### 8.2 Material List:

ITEM	PART	DESCRIPTION	SUPPLIES
1	TERMINAL	TERMINAL COPPER	CHILISIN
2	CORE	FERRITE	CHILISIN
3	WIRE	COPPER WIRE	
4	EPOXY	EME-1200D3	SUMITOMO



# NL322522T Series Specification

## 9 Reliability Of Ferrite Wire Wound Chip Inductor/FERRITE SERIES

Test item	Specification	Test condition / Test method
● Electrical performance test		
Inductance L	Refer to standard electrical characteristic list	□HP4194A with HP-16034E test fixture
Q		
Self resonance frequency SRF		□HP4291A with HP-16093A test fixture
DC Resistance RDC		CH-502AC
Rated current IDC		Applied the current to coils . The Inductance change shall be less than 10% to initial value & temperature rise shall not be more than 20℃
Temperature rise test	20℃ max.	1 . Applied the allowed DC current for 10 minutes 2 . Temperature measure by digital surface thermometer
Over load test	After test . Inductors shall be no evidence of electrical and mechanical damage	Applied 2 times of rated allowed DC current to inductor for a period of 5 minutes
Withstanding voltage test	After tset . Inductors shall be no evidence of electrical and mechanical damage	AC voltage of 1000VAC applied between inductors terminal and coating for 5 seconds
Insulation resistance test	1000 MΩ min .	100 VDC applied between inductor terminal and coating
● Mechanical performance test		
Vibration test (Low frequency)	1 . Inductors shall be no evidence of electrical and mechanical damage	1 . Amplitude : 1.5 m/m 2 . Frequency : 10 – 55 – 10 Hz / 1min. 3 . Direction : X · Y · Z 4 . Duration : 2 hrs / X · Y · Z
Shock test	2 . Inductance shall not change more than±5%	Inductors shall be dropped 10 times from a height of 1m onto 3cm wooden board
Resistance to soldering heat	3 . Q Shall not change more than ±20%	Temp : 260±5℃ Time : 10±1.0 sec.



# NL322522T Series Specification

Terminal strength-pull test	Terminal shall not be loosened or ruptured	A 0.5kg load shall be applied to both Terminals in the axis direction for 1 minute .
Solderability test	The terminal shall be at least 90% covered with solder	After fluxing , Inductor shall be dipped in a melted solder bath at $240\pm 5^{\circ}\text{C}$ for 5 seconds .
Resistance to solvent test	There shall be no case deformation change in appearance or obliteration of marking	MIL-STD-202F , Method 215D
● Climatic test		
Temperature characteristic	1 . Inductors shall be no evidence of electrical and mechanical damage  2 . Inductance shall not change more than $\pm 10\%$  3 . Q shall not change more than $\pm 20\%$	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Humidity test		1 . Temp : $40\pm 2^{\circ}\text{C}$ 2 . R.H. : 90 -- 95% 3 . Time : $96\pm 2$ hours
Cold test		1 . Temp : $-25\pm 2^{\circ}\text{C}$ 2 . Time : $96\pm 2$ hours
Thermal shock test		<p style="text-align: center;"> <math>\xrightarrow{\text{Room temp}} \xrightarrow{15 \text{ mins}} \xrightarrow{-40\pm 2^{\circ}\text{C}} \xrightarrow{30 \text{ mins}} \xrightarrow{\text{Room temp}}</math>  <math>\xrightarrow{\text{Room temp}} \xrightarrow{15 \text{ mins}} \xrightarrow{+125\pm 2^{\circ}\text{C}} \xrightarrow{30 \text{ mins}} \xrightarrow{\text{Room temp}}</math> </p>
Dry heat test		Total : 5 cycles 1 . Temp : $85\pm 2^{\circ}\text{C}$ 2 . Time : $96\pm 2$ hours
High temperature load life test	There shall be no evidence of short or open circuiting	1 . Temp : $85\pm 2^{\circ}\text{C}$ 2 . Time : $1000\pm 12$ hours 3 . Load : Allowed DC current
Humidity load life		1 . Temp : $40\pm 2^{\circ}\text{C}$ 2 . R.H. : 90 -- 95% 3 . Time : $1000\pm 12$ hours 4 . Load : Allowed DC current

● Note :  
 Unless otherwise specified , Allow the specimen to stand at room temperature for 1 hour or more but not more than 2 hours , Measure the electrical and mechanical performances





# NL322522T Series Specification


### Reflow profile

Peak Temp : 250°C max.

Max time above 245°C : 20~40sec max.

Max time above 217°C : 60~150sec max.

200°C~250°C Average Ramp-up Rate : 3°C/second max.

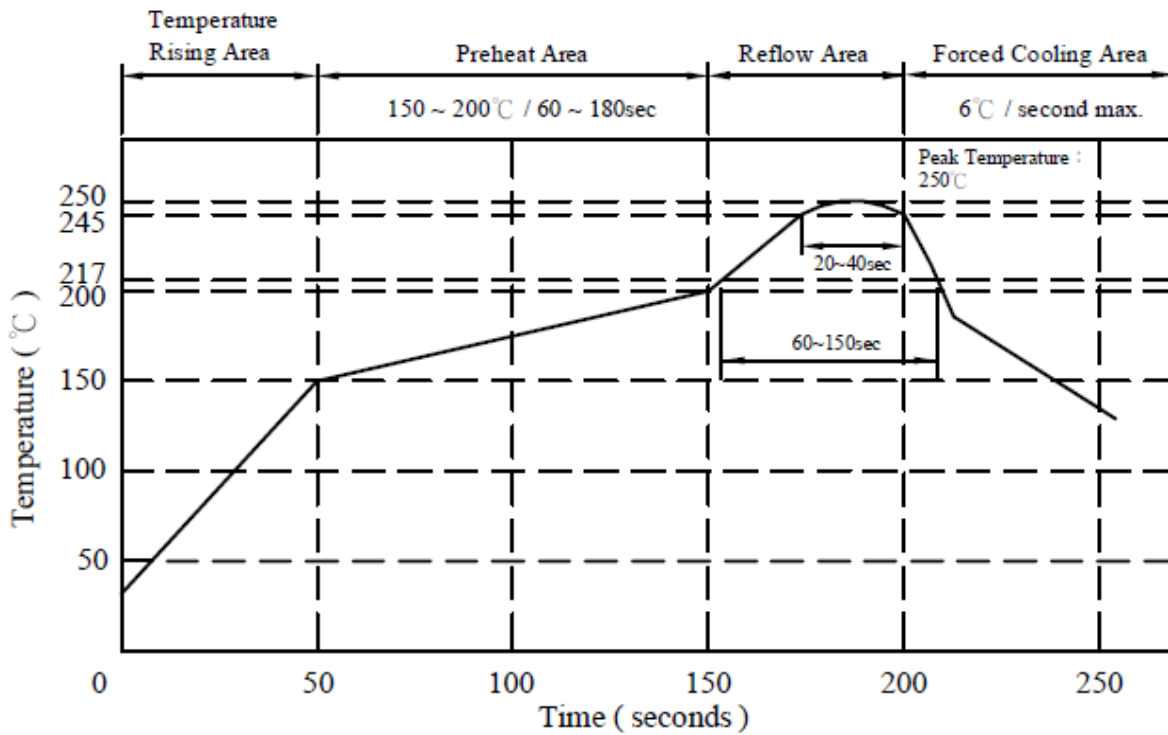


# NL322522T Series Specification

## 11 PACKAGING

### Packaging -Cover tape


The force for tearing off cover tape is 10 to 100 grams in the arrow direction.

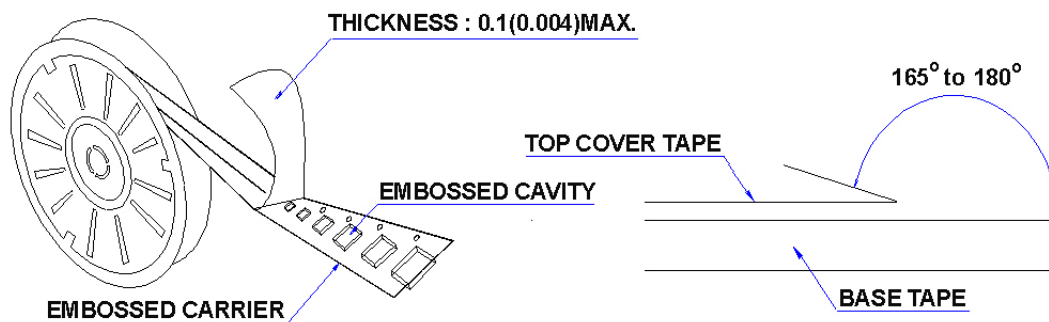

### Packaging Quantity

TYPE	BULK	PCS/REEL
NL322522	✓	2000

### Reel Dimensions

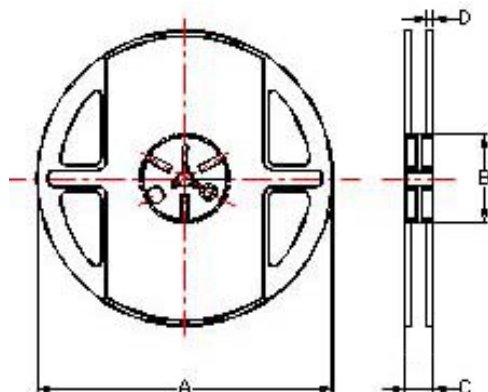


Reel Dimensions: m/m

TYPE	A	C	D	D
NL322522	180	60	12	1.5

# NL322522T Series Specification


## 11 PACKAGING

### 11.4 Tape Dimensions in mm

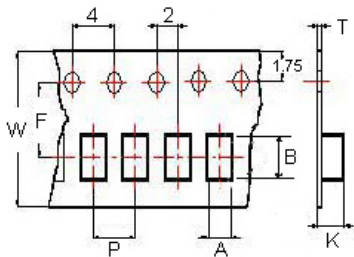

#### Tape Material

Carrier tape : polystyrene  
Cover tape : polyethylene



#### Dimensions in mm

TYPE	A	B	T	W	P	F	K
NL322522	2.96	3.60	0.23	8	4	3.5	2.40

## 12 Note:

1. Please make sure that your product is has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)