


SECTION A-A

NOTES:

1. Pitch: 8.25mm, Poles: 2P-20P;
2. Rated: 300V/20A;
3. Temp. Range: -40° C ~ +105° C;
4. Withstand Voltage: AC2000V/1Min;
5. Wire Range: 22-12AWG;
6. Insulation Resistance: 500MΩ/DC500V;
7. Max. Torque Value: 5.1Kgf.cm.
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	over	to	over	over	over	
6	10	10	6	30	90	200	∩
6	10	24	6	30	90	200	∩
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7
							0.05/10

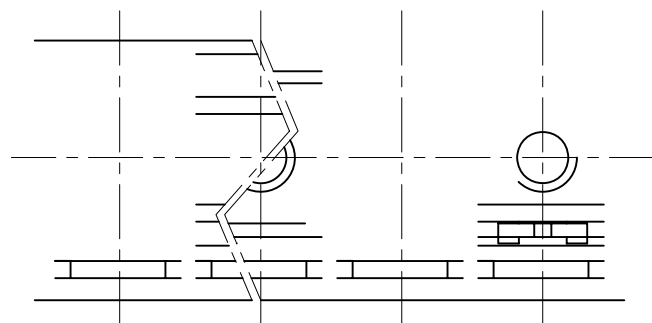

DEGSON

DG36

UL

300V 20A

22-12AWG

3	DG36S Pin header	5011B00010 (H)	XX	Brass	SnCe
2	M3*6 (6.5*6.5) bright screws	S000000490 (H)	XX	Steel	Ni plated

1	DG36S-B-Housing	5011A0YXXA (H)	1	PA66	UL94V-0 B
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

MM	DFTD	DATE
(INCH)	CHKD	DATE
	MFD	DATE
	APPVL	DATE
TOLF		
MM		
.0 ±	±	
.00 ±	±	

宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG36S-B-XXP-1Y-00A(H)

DRAWING NO.	SIZE	REV
/PART NO.	A3	A