

color: green
pitch: 5.0/5.08 mm
certification: UL, CE, VDE, CQC
Type: male

MATERIAL:



- PIN HEADER : BRASS, TIN PLATED
- HOUSING : PA66, UL94V-0

ELECTRICAL:

- RATED VOLTAGE : 300V
- RATED CURRENT : 15A
- CONTACT RESISTANCE : 20mΩ
- INSULATION RESISTANCE : 5000MΩ/1000V
- WITHSTANDING VOLTAGE : AC1500V/1Min



MECHANICAL:

- TEMP.RANGE : -40°C... +105°C
- MAX SOLDREING : +250°C, FOR 5 SEC.

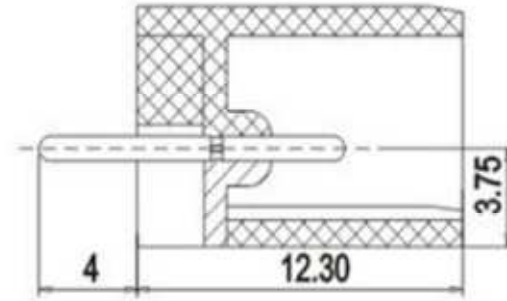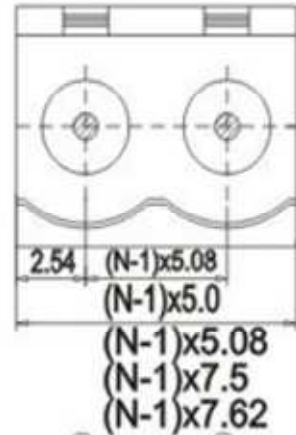


N=Number of contacts

P.C.B.LAYOUT

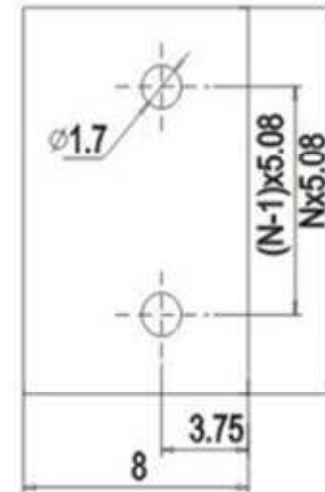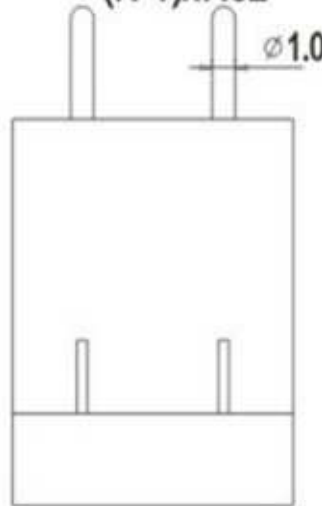

HOW TO ORDER

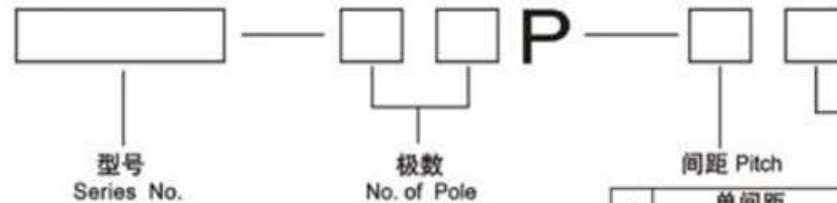

型号
Series No.

极数
No. of Pole

间距 Pitch

颜色 Color

1	单间距
	Single pitch
2	双间距
	Double pitch

1	灰色	Grey
2	蓝色	Blue
3	黑色	Black
4	绿色	Green