
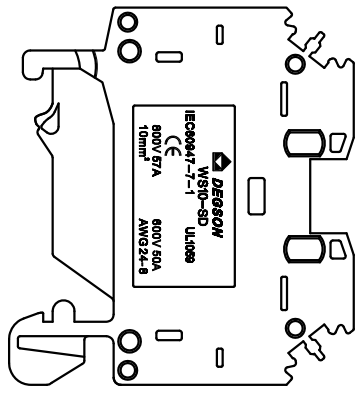

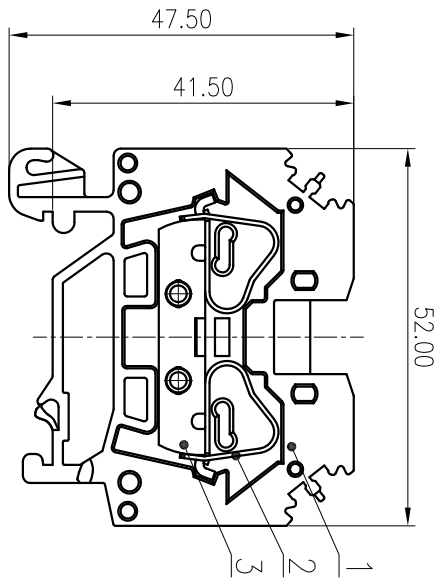


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±2°
3	6	10	18	30	50	80	120	180	250	315	400	500	±2°
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													



UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/50	600/50	/
IEC 标准/IEC Standard:			
IEC 标准/IEC Standard:	III/3	/	/
过压类别/Overvoltage Category/污染等			
级/Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A)	800/57	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)		/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~10/24~8		
间距/Pitch(mm)/线数范围/Poles	10.0/01P		
剥线长度/Stripping length(mm)	1.3~1.4		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

DEGSON® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: WS10-SD-01P-1Y-00A(H)

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL 2020.05.29		
CHKD:	Mao J 2020.05.29		
DRT:	LJB 2018.03.08		
DRAWING NO.:	WS10-SD-C01	SCALE:	1:1
TYPE:	CUSTOMER DRAWING	SHEET	1/1

3	Current Carrier	Copper	Sn Plated										
2	Spring	Stainless Steel											
1	Housing	PA66	UL94V-0										
ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRT	DATE	SIZE:A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1