




42.50

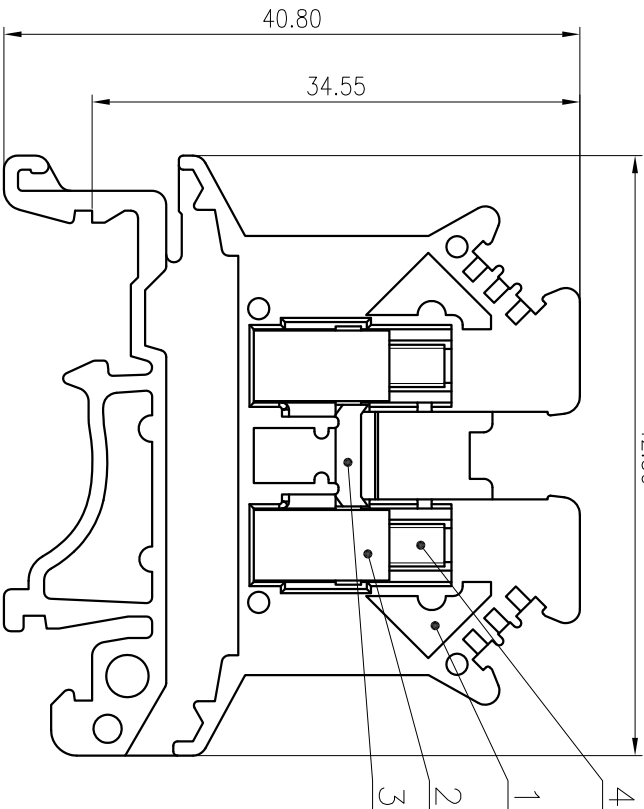

公差/General Tolerances(mm)	
0	>3
~	>5
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	±Z

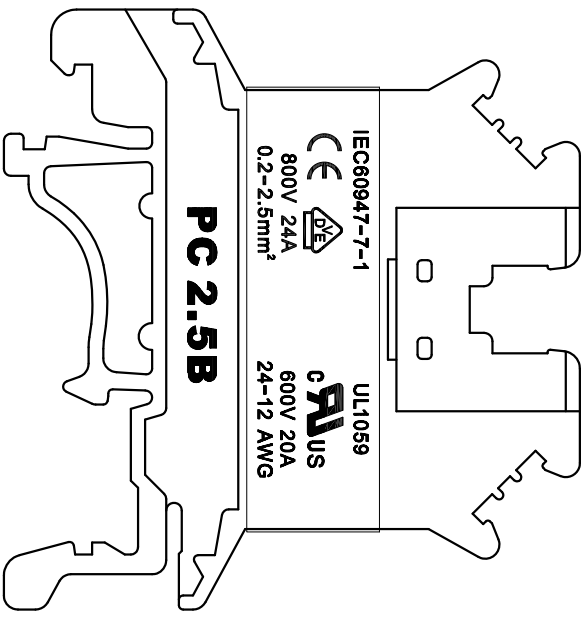

**PC 2.5B**

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Copper Alloy	M3\Ni Plated
3	Current carrier	Copper	Sn Plated
2	Cage	Copper Alloy	M3\Ni Plated
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.04.02	NAME:	PC2.5B-01P-1Y-00A(H)
CHKD:	Mao J 2020.04.02	DRAWING NO.:	PC2.5B-C01
DRFT:Wong LX	2020.04.02	TYPE:	CUSTOMER DRAWING
SIZE: A4	(mm)	SCALE:	2:1
(inch)		SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/24	/	/
额定冲击电压(kV)/Rate Impulse Voltage(kV)	8.0	/	/
额定扭矩/Torque Tightening(N·m/Lbin)	M3: 0.5/4.43		
绞合范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/24~12		
间距/Pitch(mm)	6.2		
剥线长度/Stripping length(mm)	10~11		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number	/		
PANTONE / RAL	/		