


Data sheet

Commercial Art.No.: 57.404.8355.5

Multi-tier terminal WK 4 E / U G-URL/V0

Multi-tier function terminal block with screw connection for mounting on TS 35 and TS 32, nominal cross section 4 mm², width 6 mm, color red

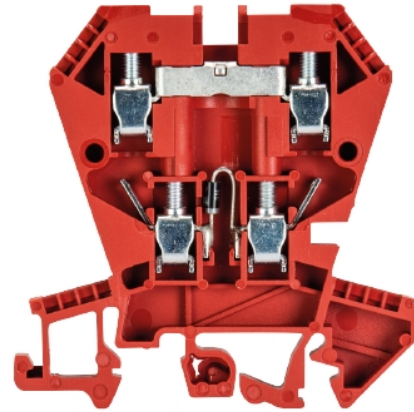

| | |
|--------------------|---------------|
| Commercial Art.No. | 57.404.8355.5 |
| EAN | 4015573604711 |
| Order Unit | 100 |

Certificates / Approvals



Technical data

General

| | |
|--|--------------------------------|
| Nominal cross section | 4 mm ² |
| Color | Red |
| Number of levels | 2 |
| Number of clamp positions per level | 2 |
| Width/grid dimension | 6 mm |
| Insulating housing | PA666 |
| Inflammability class of insulation material acc. with UL94 | V0 |
| Mounting method | DIN rail (top hat rail)/G-rail |
| Terminal blocks for electrical installations | No |
| Type of component | Diode |

Technical data

| | |
|-----------------------------|---------------|
| Rated current | 1 A |
| Rated voltage | 400 V |
| Pollution degree | 3 |
| Closing plate required | yes |
| Type of insulation material | Thermoplastic |
| Length | 61.6 mm |

Connection Data

| | |
|-------------------|------------------|
| Connection type 1 | screw connection |
| Connection type 2 | screw connection |

| | |
|-------------------------------------|---------------------|
| Minimum cross section solid | 0.5 mm ² |
| Maximum cross section solid | 4 mm ² |
| Minimum cross section fine stranded | 0.5 mm ² |
| Maximum cross section fine stranded | 4 mm ² |
| Wire strip length | 9 mm |
| Torque conductor mounting | 0.5 Nm |

Technical Data UL/CSA

| | |
|------------------------|-----------|
| Cross section UL | 22-10 AWG |
| Voltage UL | 300 V |
| Current factory wiring | 20 A |
| Current field wiring | 20 A |
| Cross section CSA | 20-12 AWG |
| Voltage CSA | 300 V |
| Current CSA | 10 A |

Classification


| | |
|------------|----------|
| ECLASS 11 | |
| ECLASS 8.1 | 27141127 |
| ETIM 7.0 | EC000903 |
| ETIM 6.0 | EC000903 |
| ETIM 5.0 | EC000903 |
| ETIM 4.0 | EC000903 |
| ETIM 3.0 | EC000903 |

Accessories


| Commercial Art.No.: | Article-type description: | Description: |
|---------------------|---------------------------------------|---|
| Z7.256.4227.0 | Jumper bar IVBS WK4 E - 2 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 2 - pole |
| Z7.256.4327.0 | Jumper bar IVBS WK4 E - 3 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 3 - pole |
| Z7.256.4427.0 | Jumper bar IVBS WK4 E - 4 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 4 - pole |
| Z7.256.4527.0 | Jumper bar IVBS WK4 E - 5 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 5 - pole |
| Z7.256.4627.0 | Jumper bar IVBS WK4 E - 6 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 6 - pole |
| Z7.256.4727.0 | Jumper bar IVBS WK4 E - 7 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 7 - pole |
| Z7.256.4827.0 | Jumper bar IVBS WK4 E - 8 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 8 - pole |
| Z7.256.4927.0 | Jumper bar IVBS WK4 E - 9 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 9 - pole |
| Z7.256.5027.0 | Jumper bar IVBS WK4 E - 10 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 10 - pole |
| Z7.256.5127.0 | Jumper bar IVBS WK4 E - 11 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 11 - pole |
| Z7.256.5227.0 | Jumper bar IVBS WK4 E - 12 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 12 - pole |
| 98.190.0000.0 | Mounting rail TS 32 UNPERF - l:2000mm | Mounting rail G 32, unslotted, Höhe 5,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated |

| | | |
|---------------|--|--|
| 98.190.1000.0 | Mounting rail TS 32 PERF 15mm - l:2000mm | Mounting rail G 32, slotted, Höhe 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.210.0000.0 | Mounting rail TS 32 UNPERF AL - l:2000mm | Mounting rail G 32, unslotted, Höhe 15 mm, length 2 m, material Aluminium |
| 98.220.0000.0 | Mounting rail TS 32 UNPERF CU - l:2000mm | Mounting rail G 32, unslotted, Höhe 15 mm, length 2 m, material E copper |
| 98.300.0000.0 | Mounting rail TS 35x7,5 UNPERF - l:2000mm | Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.300.1000.0 | Mounting rail TS 35x7,5 PERF 15mm - l:2000mm | Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.300.1900.0 | Mounting rail TS 35x7,5 PERF 25mm - l:2000mm | Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.360.0000.0 | Mounting rail TS 35x15-2,3 UNPERF - l:2000mm | Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.360.0004.0 | Mounting rail TS 35x15-2,3 UNPERF FZN - l:2000mm | Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized |
| 98.370.0000.0 | Mounting rail TS 35x15 UNPERF - l:2000mm | Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.370.1000.0 | Mounting rail TS 35x15 PERF 15mm - l:2000mm | Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated |
| 98.380.0000.0 | Mounting rail TS 35x15-2,3 UNPERF CU - l:2000mm | Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper |
| 07.311.4055.0 | End plate AP 4 E /V0 | End plate for DIN rail terminal blocks type WK 4 E..., color: grey |
| 07.311.5055.0 | Partition TW 4 E /V0 | Partition for DIN rail terminal blocks type WK 4 E..., color: grey |
| Z7.210.3227.0 | Jumper bar 9215 - 2 | Cross connector for DIN rail terminal blocks type WK 4 ..., 2-pole |
| Z7.210.3327.0 | Jumper bar 9215 - 3 | Cross connector for DIN rail terminal blocks type WK 4 ..., 3-pole |
| Z7.210.3427.0 | Jumper bar 9215 - 4 | Cross connector for DIN rail terminal blocks type WK 4 ..., 4-pole |
| Z7.210.3527.0 | Jumper bar 9215 - 5 | Cross connector for DIN rail terminal blocks type WK 4 ..., 5-pole |
| Z7.210.3627.0 | Jumper bar 9215 - 6 | Cross connector for DIN rail terminal blocks type WK 4 ..., 6-pole |
| Z7.255.2227.0 | Jumper bar IVB WK4 E - 2 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 2 - pole |
| Z7.255.2327.0 | Jumper bar IVB WK4 E - 3 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 3 - pole |
| Z7.255.2427.0 | Jumper bar IVB WK4 E - 4 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 4 - pole |
| Z7.255.2527.0 | Jumper bar IVB WK4 E - 5 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 5 - pole |
| Z7.255.2627.0 | Jumper bar IVB WK4 E - 6 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 6 - pole |
| Z7.255.2727.0 | Jumper bar IVB WK4 E - 7 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 7 - pole |
| Z7.255.2827.0 | Jumper bar IVB WK4 E - 8 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 8 - pole |
| Z7.255.2927.0 | Jumper bar IVB WK4 E - 9 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 9 - pole |
| Z7.255.3027.0 | Jumper bar IVB WK4 E - 10 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 10 - pole |
| Z7.255.3127.0 | Jumper bar IVB WK4 E - 11 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 11 - pole |
| Z7.255.3227.0 | Jumper bar IVB WK4 E - 12 | Jumper comp, insulated for DIN rail terminal blocks type WK ..., 12 - pole |
| Z7.271.2227.0 | Insulated jumper bar IVB WK4 E/U- 2 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 2 - pole |
| Z7.271.2327.0 | Insulated jumper bar IVB WK4 E/U- 3 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 3 - pole |

| | | |
|---------------|--|--|
| Z7.271.2427.0 | Insulated jumper bar IVB WK4 E/U- 4 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 4 - pole |
| Z7.271.2527.0 | Insulated jumper bar IVB WK4 E/U- 5 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 5 - pole |
| Z7.271.2627.0 | Insulated jumper bar IVB WK4 E/U- 6 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 6 - pole |
| Z7.271.3027.0 | Insulated jumper bar IVB WK4 E/U-10 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 10 - pole |
| Z7.271.3227.0 | Insulated jumper bar IVB WK4 E/U-12 | Cross connector, insulated for DIN rail terminal blocks type WK ..., 12 - pole |
| 98.300.1800.0 | Mounting rail TS 35x7,5 PERF 18mm - l:2000mm | Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated |

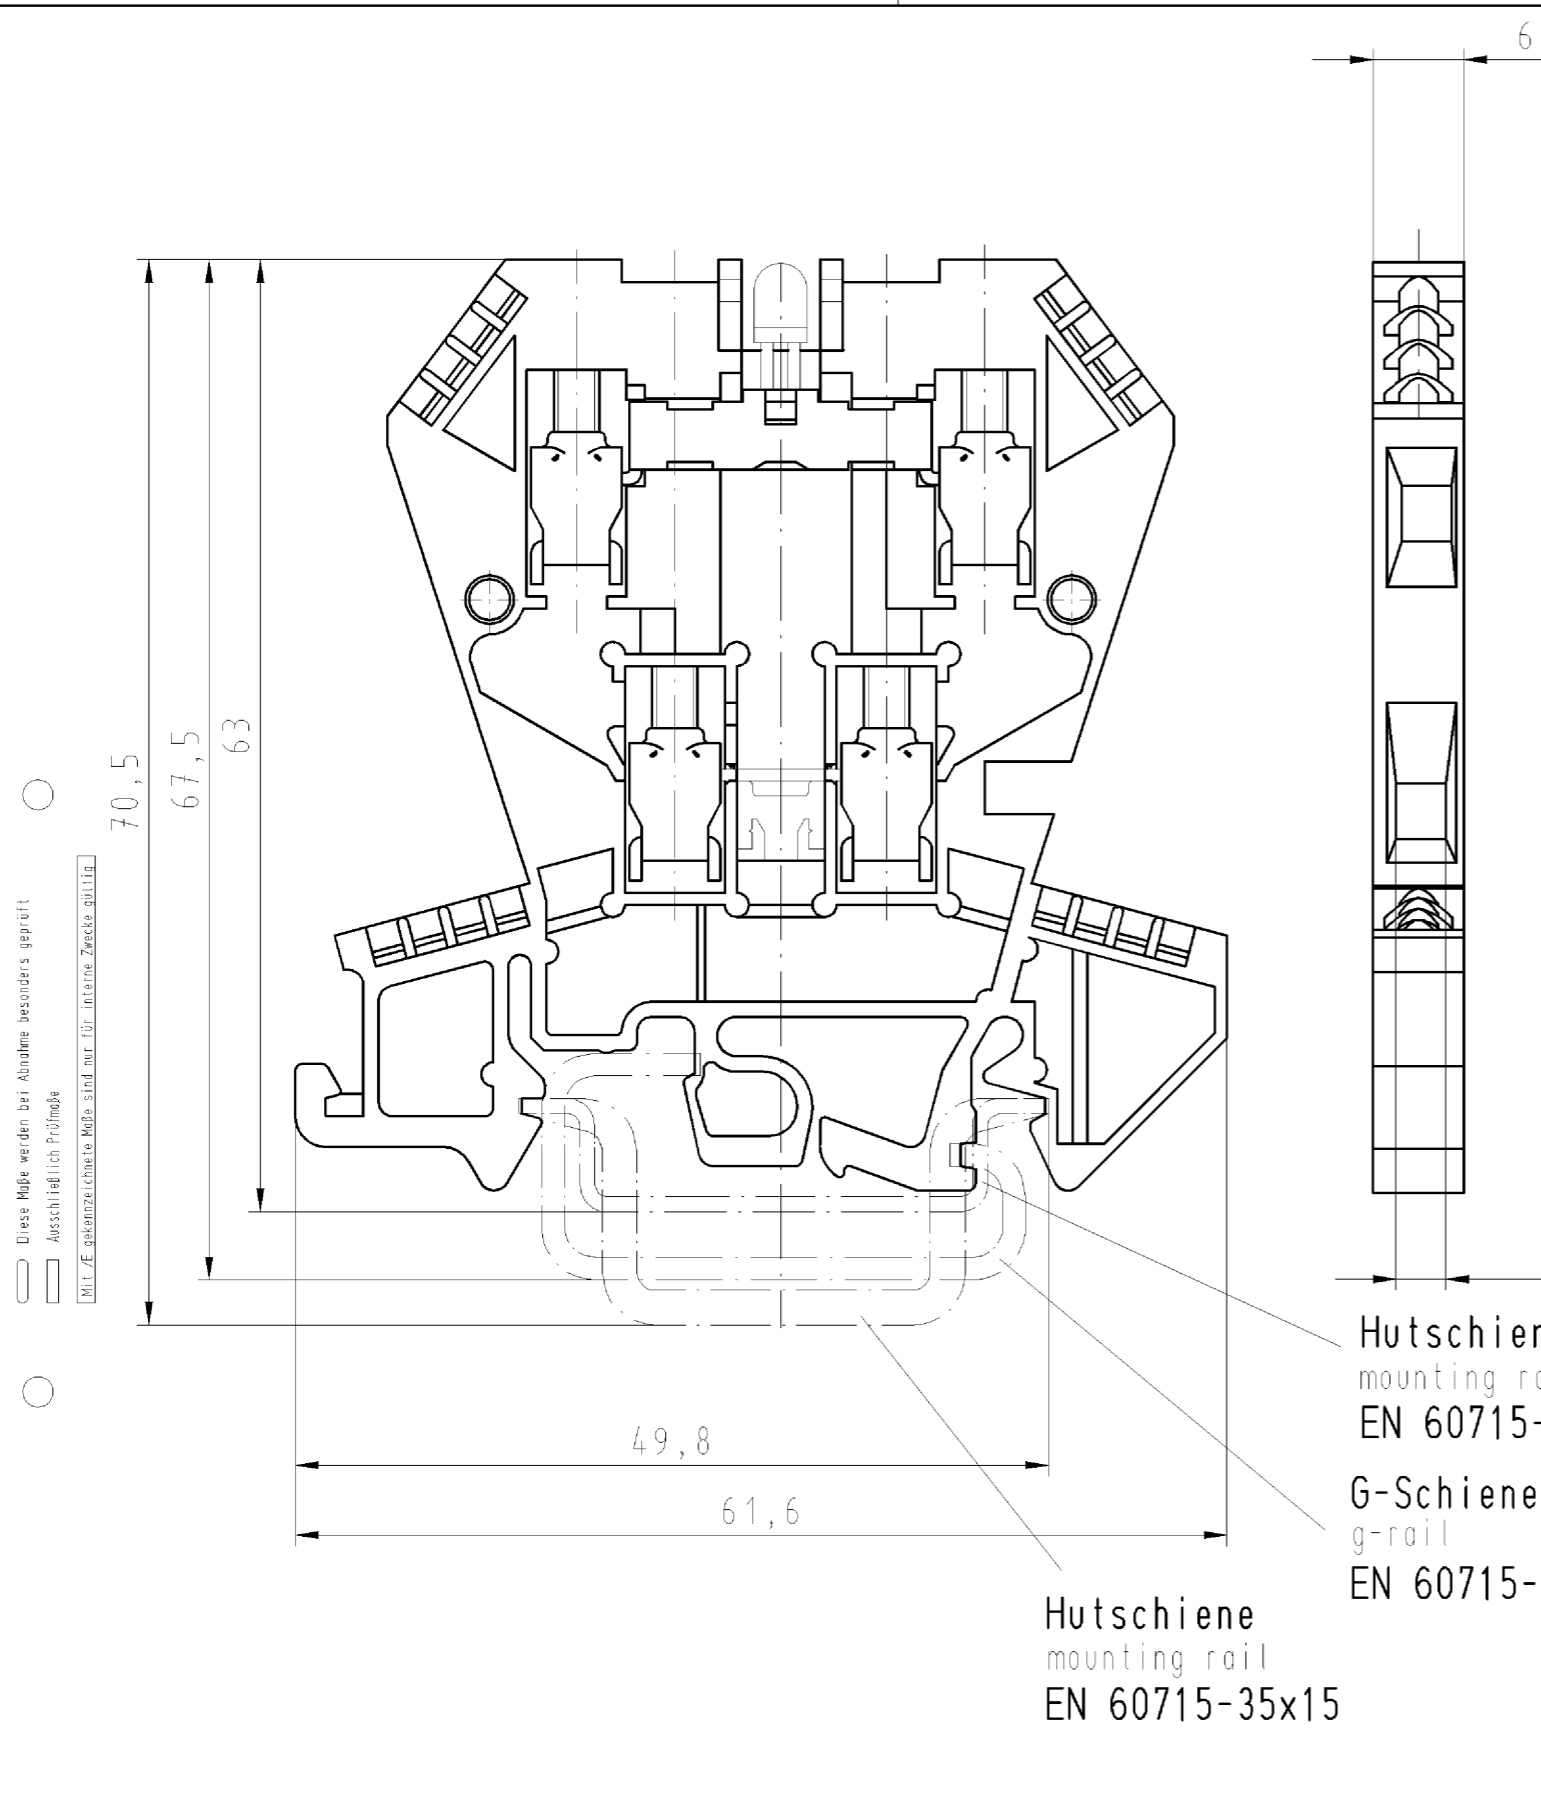

○ Diese Maße werden bei Abnahme besonders geprüft
 ○ Ausschließlich Prüfmaße
 ○ Mit AE gekennzeichnete Maße sind nur für interne Zwecke gültig



Weitere Daten siehe Katalog
 further data see catalog

| Teile-Nr. /part-nr. | Typ/type WK4 E/U... | LED-Farbe LED-colour | mit gedrehter Diode with inverted diode | |
|------------------------|------------------------|-------------------------|--|--|
| 57.404.8355.5 | ...G-URL | | | |
| 57.404.8055.9 | ...G-ULR | | X | |
| 57.404.8255.5 | ...G0 | | | |
| 57.404.8155.9 | ...GU | | X | |
| 57.404.7255.5 | ...LD+P0 | rot/red | | |
| 57.404.8755.5 | ..LDG+P024 | grün/green | | |
| 57.404.7455.9 | ..LD-PO 24 | rot/red | | |
| 57.404.7955.5 | ...G2 | | | |
| 57.404.8855.9 | ...G2/1 | | X | |
| 57.404.8455.5 | ...LD 42 | rot/red | | |
| 57.404.6255.9 | ...LD+P0 24LD | rot/red | | |

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung
 seiner Inhalte ist ohne schriftliche Genehmigung der Wieland-Werke AG.
 The publication, distribution and utilization of the contents of this document as well as the
 communication of its contents to others without express authorization is prohibited.

R=2,2K
0,35W

R=2,2K
0,35W

1A/1000V

1A/1000V
R=6,8K
0,6W

1A/1000V
R=2,2K
0,35W

| | | | | | | | | | |
|-------------------|---------------|---|----------|-----------------|------------------|---|---------------|--------------------------------------|-------|
| Freitoleranz nach | | CAD - Zeichnung, keine manuellen Änderungen | | | 1. Verwendung: - | | Bl.: 1 von 1 | | |
| | Maßstab | Werkstoff und Oberfläche: | | 2003 | Tag | Name | | Zeichnung Nr. T 57.404.6255.9 01K | Index |
| | 2:1 | | | Entworfen | 15.05. | Schmitt J. | | | |
| | | | | Geprüft | - | | | | |
| | Vol. | mm ³ | Dtl. | mm ² | Normgepr. | - | Ersatz für: - | | |
| | | wieland | | WK 4 E/U ... | | Benennung ETAGENKLEMME modular double-deck terminal | | | |
| Buchstabe | Datum / Blatt | | Änderung | | | | | | |