

DETAILS

Product Number	CS14130_HB-IP-2X6-W
Family	High Bay
Type	Assembly
Color	white
Diameter	173 + 71,4 mm
Height	11,4 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	screw, pin
Status	production ready
ROHS Compliant	Yes
Date Updated	8/09/2016



OPTICAL PROPERTIES

LED	Viewing	Light	Effi-		Connector
	Angle	Beam	ciency	cd/lm	
XT-E	58 deg	Wide	94 %	0.870	-
XM-L	sim: 57	Wide	sim: 93 %	-	-
XM-L2	61 deg	Wide	94 %	0.800	-
XP-G2	58 deg	Wide	93 %	0.870	-
XB-D	sim: 52	Wide	sim: 90 %	-	-
XP-G	60 deg	Wide	94 %	0.840	-
XP-L	67 deg	Wide	94 %	0.750	-
XP-E2	sim: 56	Wide	sim: 94 %	-	-
XHP35 HD	sim: 60	Wide	sim: 94 %	sim: 0.930	-
XHP35 HI	sim: 57	Wide	sim: 94 %	sim: 0.980	-
XP-G3	59 deg	Wide	94 %	0.840	-
MHB-A	sim: 60	Wide	sim: 91 %	sim: 0.860	-
XP-L2	62 deg	Wide	94 %	0.770	-
H35C1 (LEMWA33)	sim: 59	Wide	sim: 94 %	sim: 0.960	-
LUXEON Rebel	sim: 50	Wide	sim: 93 %	-	-
LUXEON T	60 deg	Wide	94 %	0.860	-
LUXEON Rebel ES	57 deg	Wide	94 %	0.860	-
LUXEON R	58 deg	Wide	94 %	0.900	-
LUXEON Z ES	52 deg	Wide	94 %	1.000	-
LUXEON TX	54 deg	Wide	94 %	0.960	-
LUXEON XR-TX (L2T0-xyy012M)	60 deg	Wide	94 %	0.900	-
NVSxx19B/NVSxx19C	58 deg	Wide	94 %	0.870	-
NF2x757A	sim: 50	Wide	sim: 93 %	-	-
NVSxE21A	51 deg	Wide	94 %	1.140	-
Oslon Square PC	sim: 56	Wide	sim: 93 %	-	-





PRODUCT DATASHEET

High Bay series


last update 8/9/2016

OPTICAL PROPERTIES



LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
Oslon Square EC	sim: 56	Wide	sim: 93 %	-	-
Duris S8	sim: 56	Wide	sim: 95 %	sim: 1.140	-
Oslon SSL 80	sim: 52	Wide	sim: 94 %	sim: 1.200	-
Oslon Square Gen3	sim: 56	Wide	sim: 94 %	1.080	-
Z5M1/Z5M2	59 deg	Wide	94 %	0.870	-
Acrich MJT 4040	sim: 52	Wide	sim: 93 %	sim: 1.200	-
Z5M	sim: 50	Wide	sim: 94 %	sim: 1.000	-
Z8Y22P	57 deg	Wide	94 %	0.880	-
TL1L3	sim: 54	Wide	sim: 89 %	-	-
TL1L2	sim: 55	Wide	sim: 94 %	sim: 0.980	-
TL1L4	56 deg	Wide	94 %	0.950	-

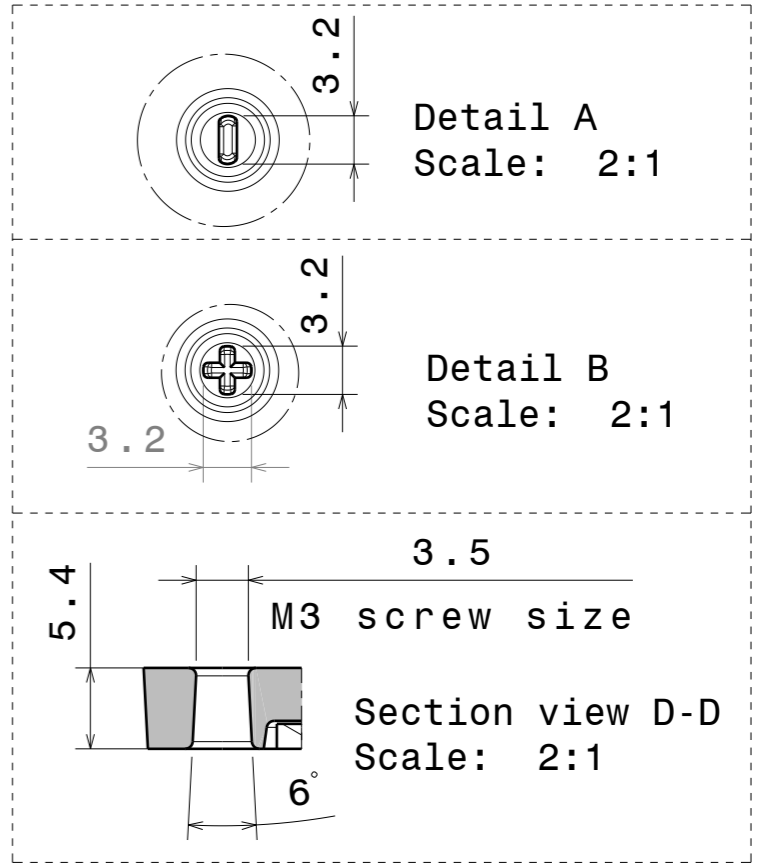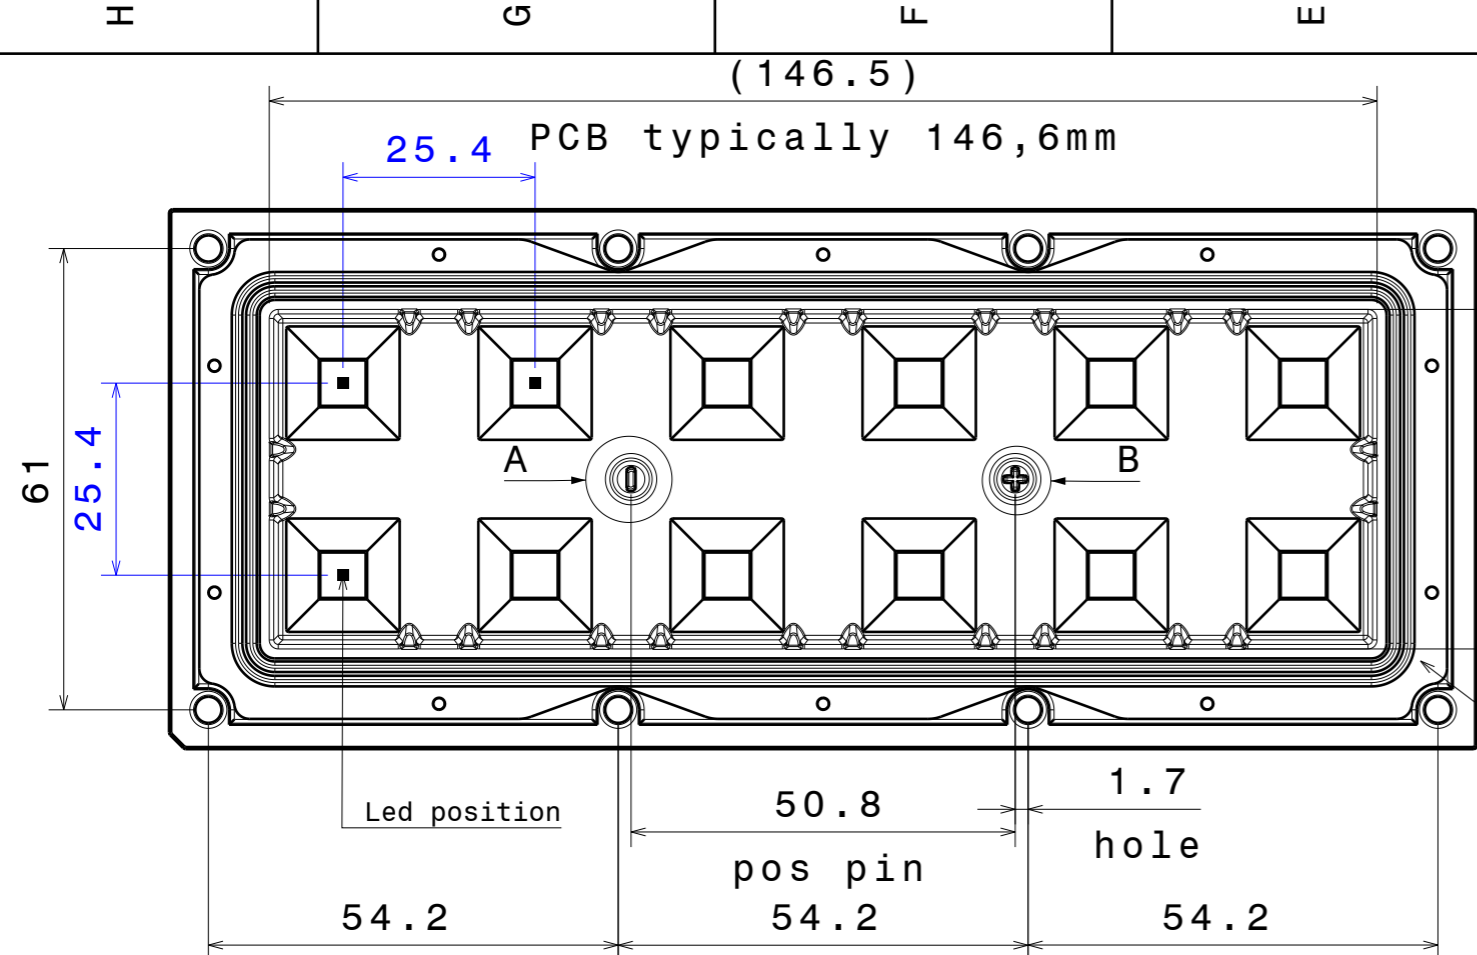

Wiring:
PCB is fully sealed between the lens with silicone seal and the heatsink. Wiring needs to be done through the PCB and heat sink to maintain high IP rating.

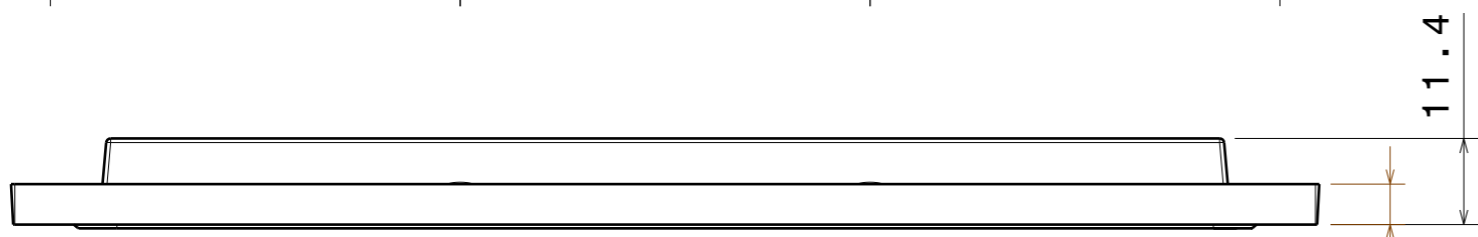

Fasten middle screws first. Recommended torque with pan head screw: 0.57Nm (for 1.6mm thick PCB, no thermal pad)

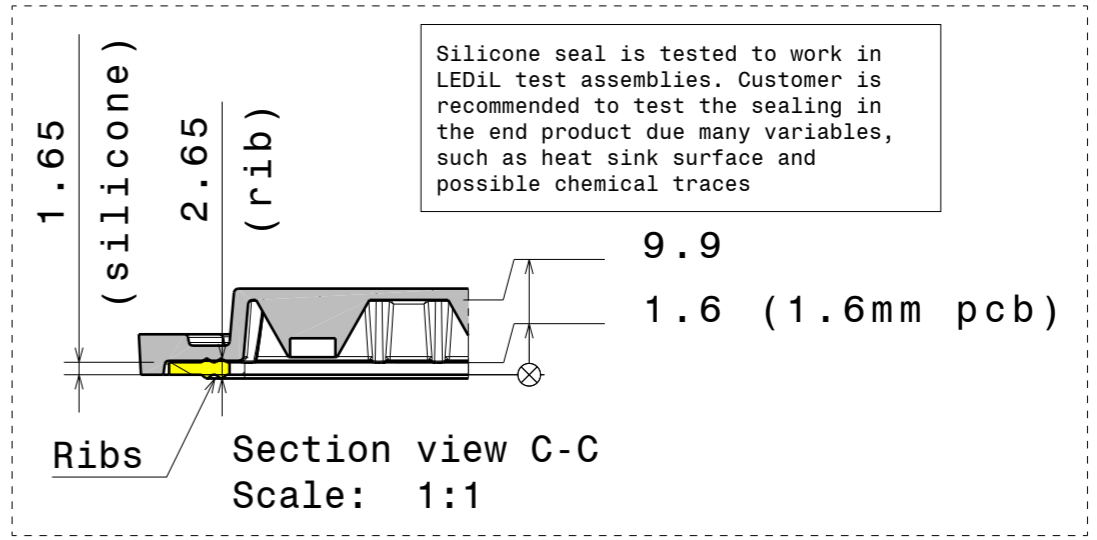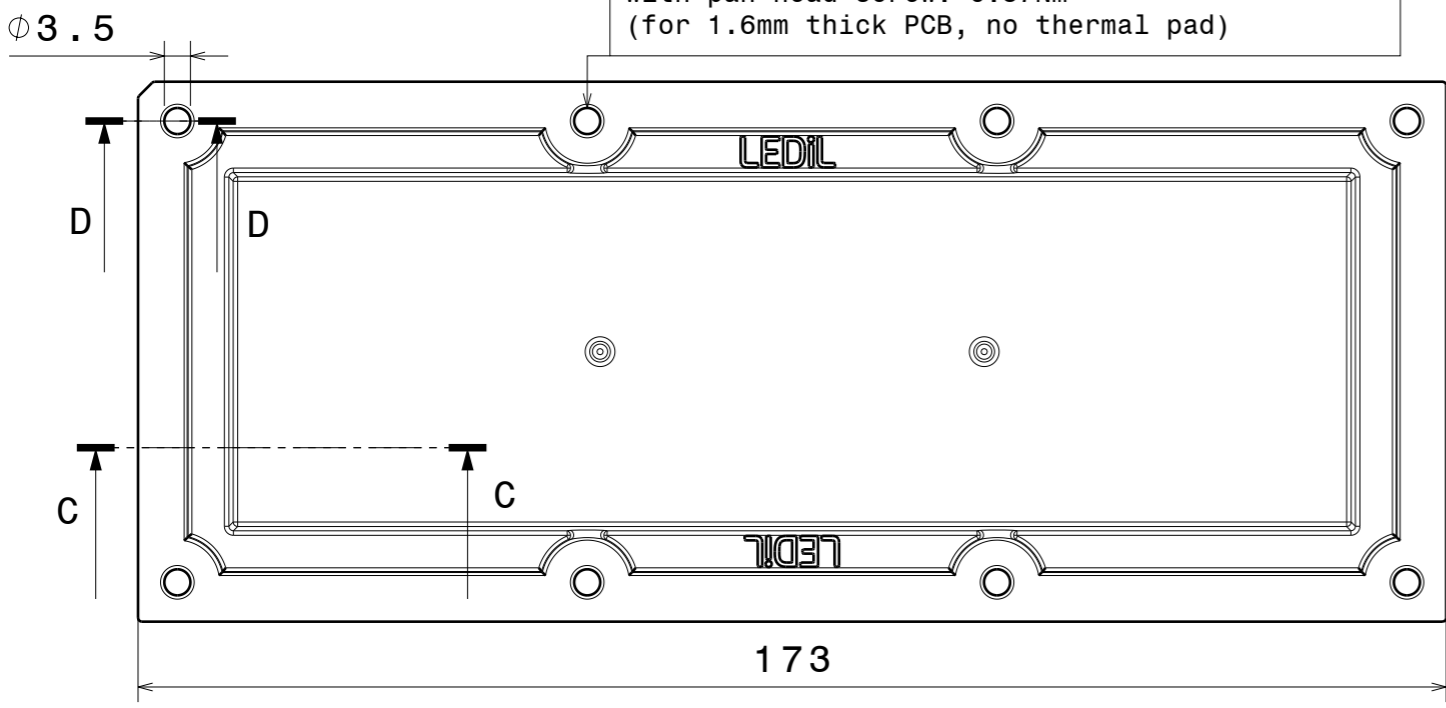

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	CS14130	HB-IP-2x6-W	PMMA 8N, Silicone seal	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

LEDiL
Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
CS14130_HB-IP-2x6-W


This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."

SIZE	PART NUMBER
A3	CS14130


SCALE	1:1	WEIGHT		SHEET	1/1
-------	-----	--------	--	-------	-----

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XT-E)


Lamps: 1 x CREE_XT-E_6x2_(XTEAWT-00-0000-000000HE4)_1253.92lm@250mA_P=8.86265W_I=249.8mA

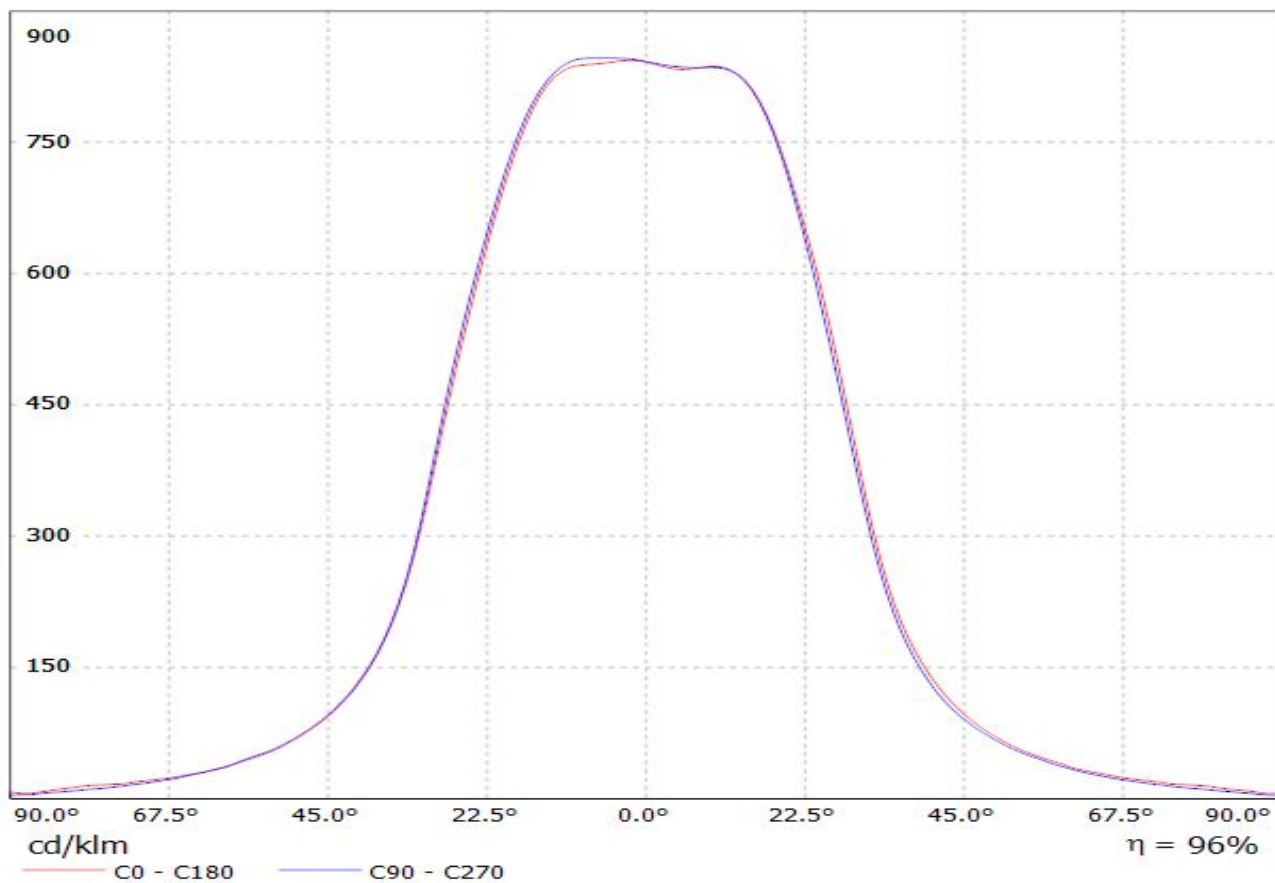


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XM-L2) Eff.94.0%
Lamps: 1 x CREE_XM-L2_2x6_1197.78lm@250mA_P=8.38555W_I=254.1mA

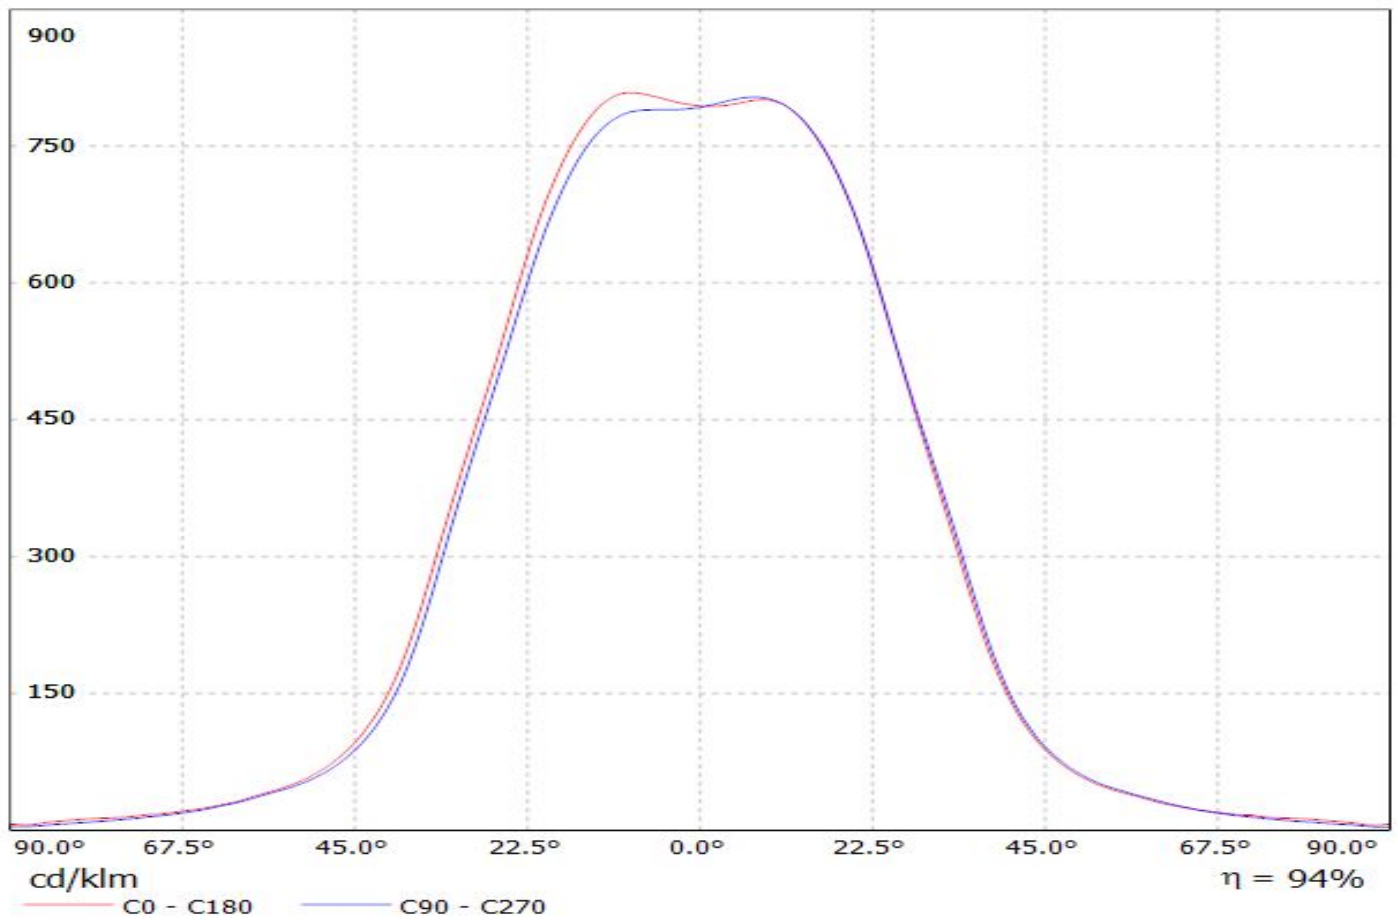

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XP-G2) Eff.93.2%
Lamps: 1 x CREE_XP-G2_1303lm@250mA_P=8.58363W_I=249.8mA

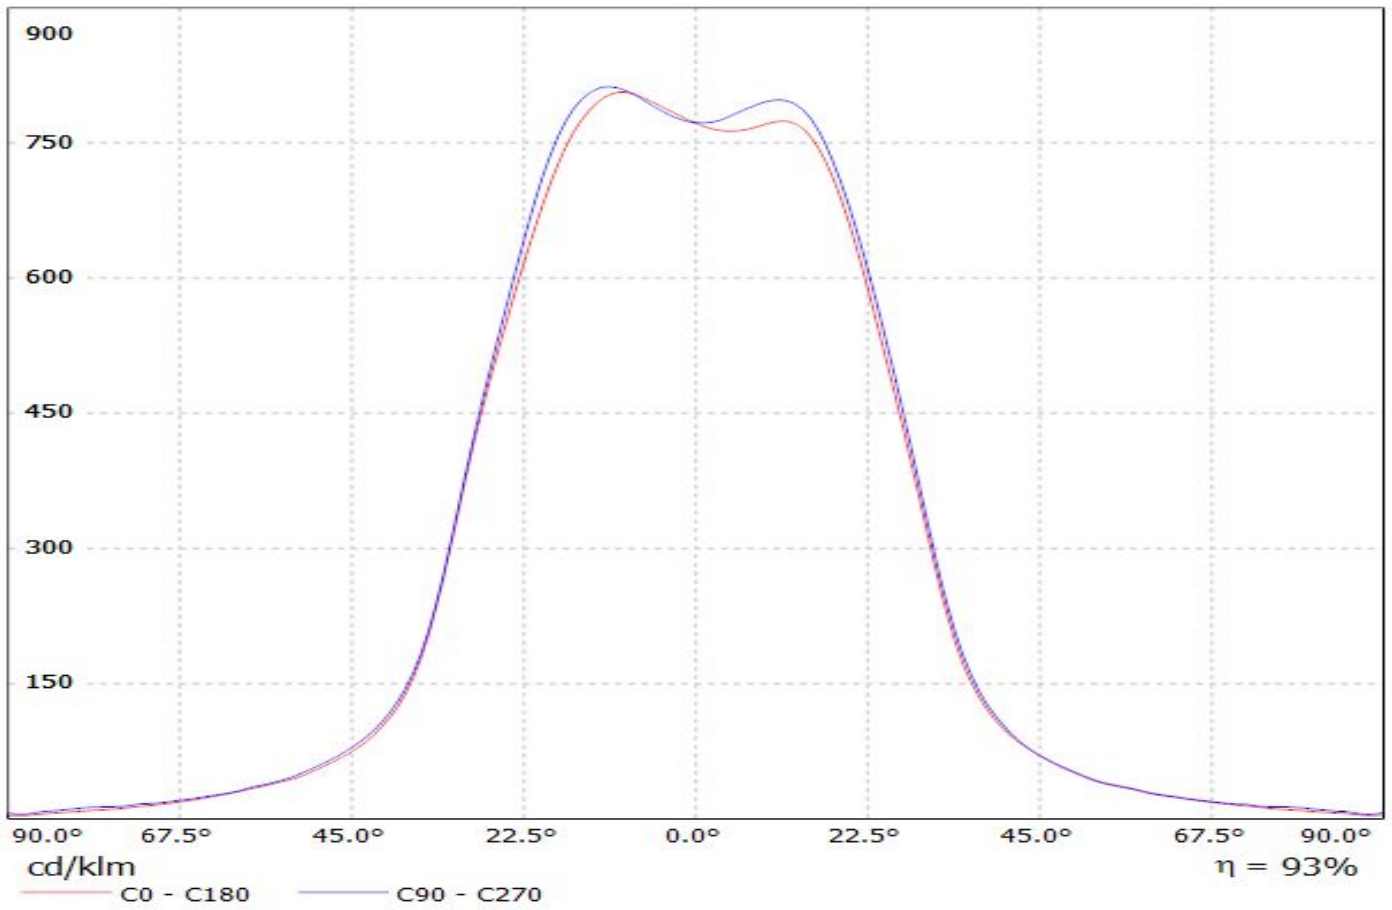


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XP-G) Eff 94.0%
Lamps: 1 x CREE_XP-G_6x2_799.2lm@250mA_P=8.52542W_I=249.8mA

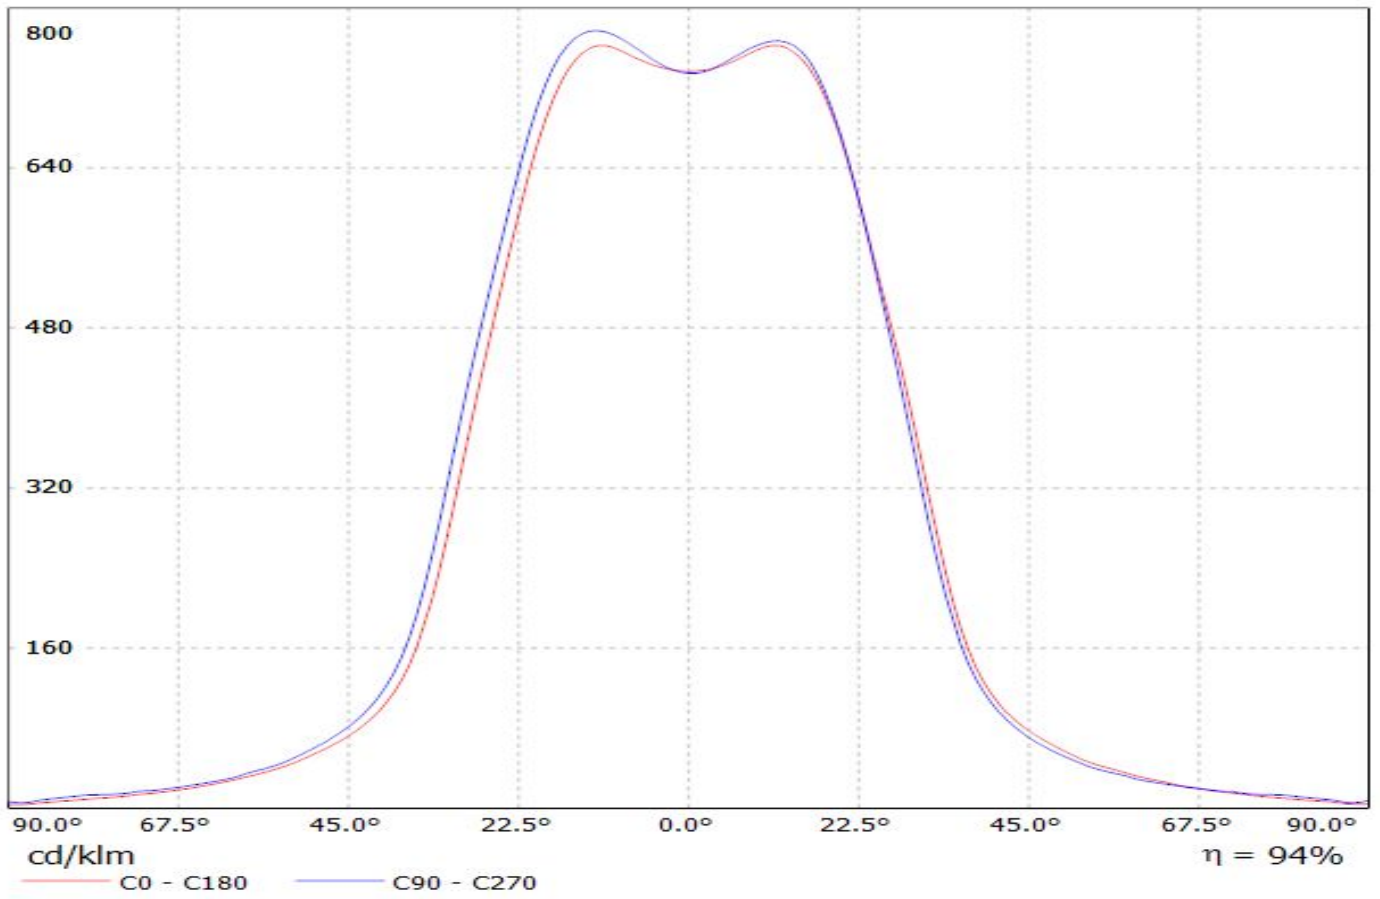


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XP-L)

Lamps: 1 x CREE_XP-L_2x6_(XPLAWT-0-7A3-U50-0H-0001)_1253.88lm@250mA_P=8.22317W_I=249.8mA

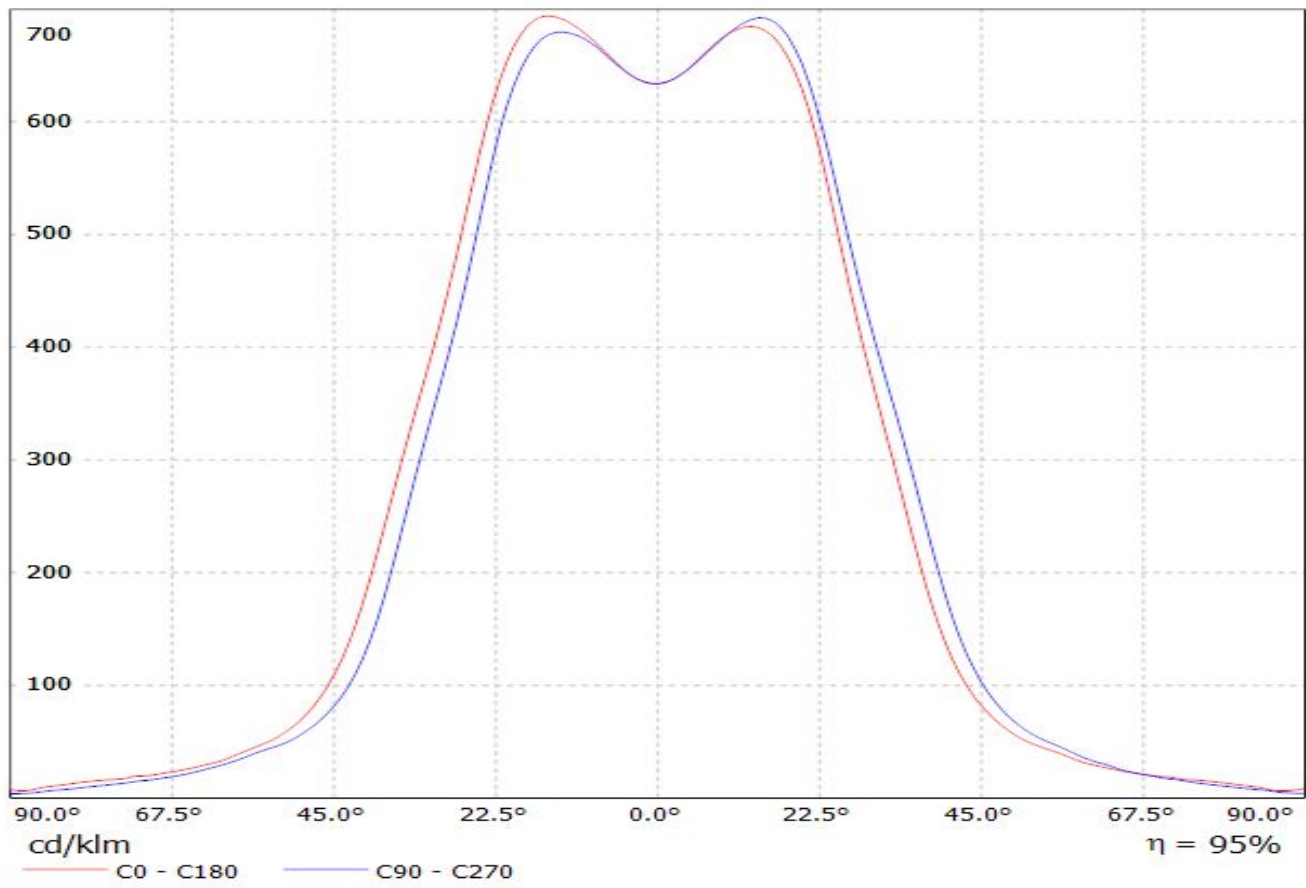


Luminaire: Ledil CS14130_HB-IP-2X6-W_(XP-G3)


Lamps: 1 x Cree_XP-G3_6x2_(XPGDWT-B1-6C1-S3-0-01)_1521.26lm@250mA_P=8.253W_I=0.25A

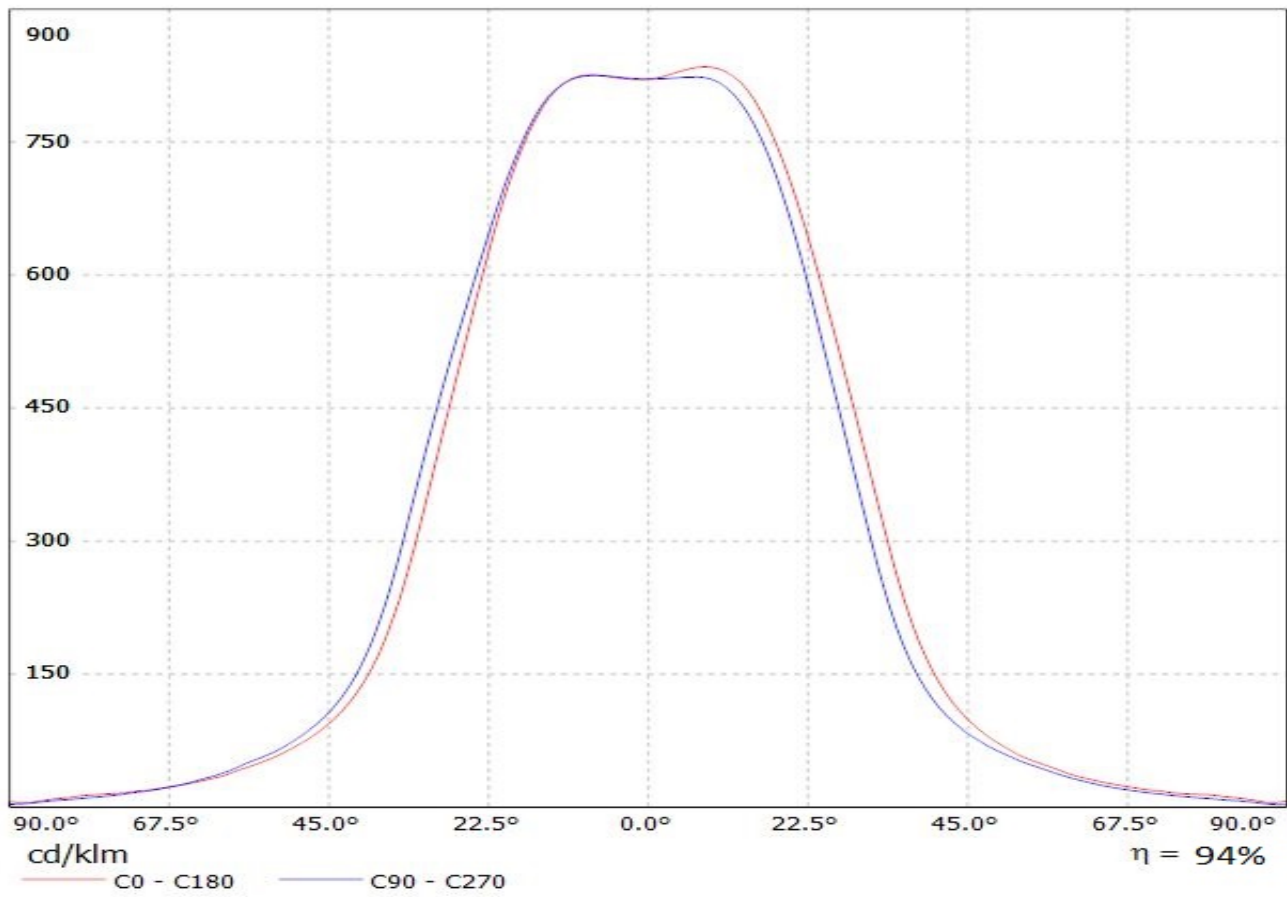


Luminaire: Ledil Oy CS14130_HB-IP-2X6-W-MH-B_SIMULATED
Lamps: 1 x Cree MH-B

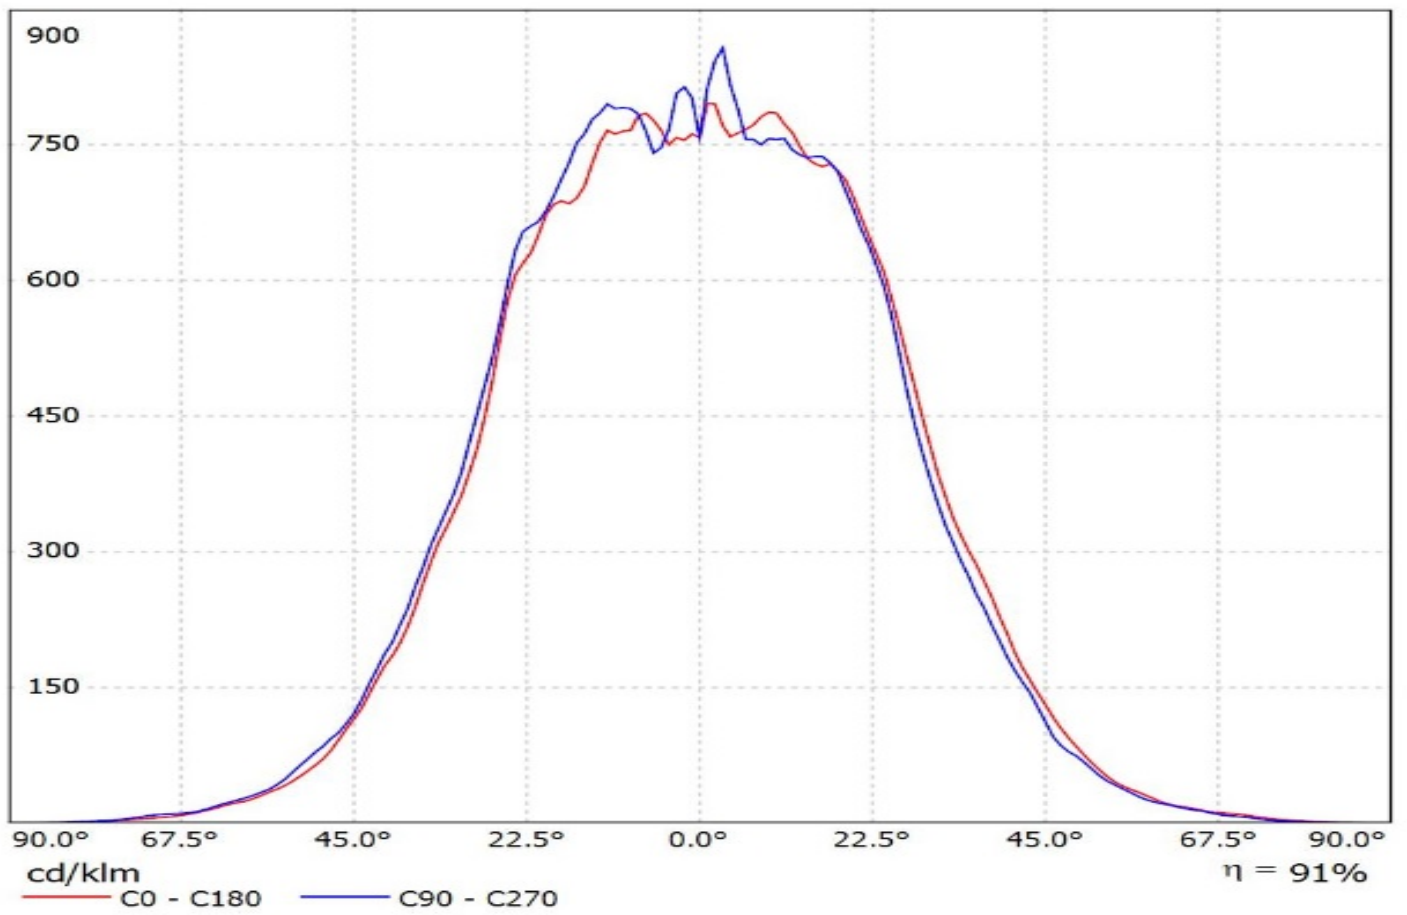


Luminaire: Ledil CS14130_HB-IP-2X6-W_(XP-L2)
Lamps: 1 x Cree_XP-L2_2x6_1659.4lm@250mA_P=8.22525W_I=0.25A

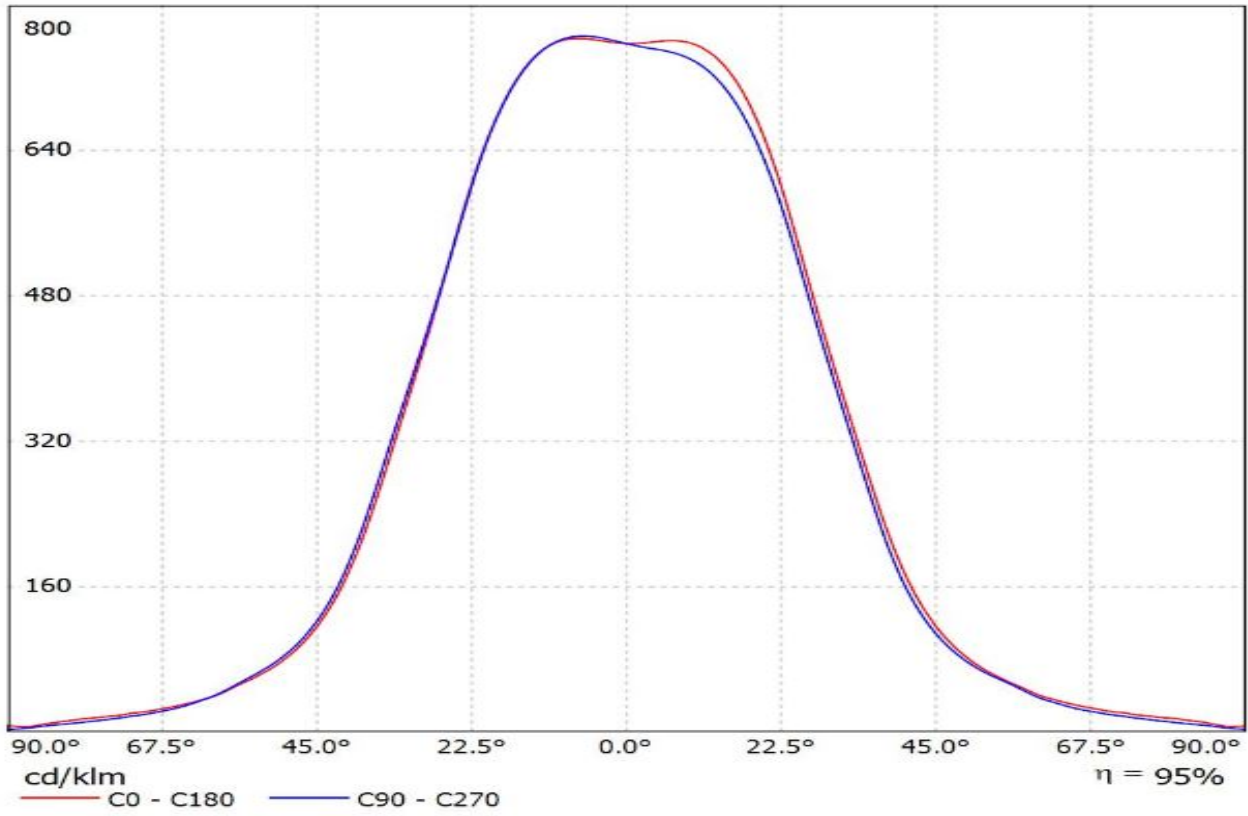


Luminaire: Ledil Oy CS14130_HB-IP-2X6-W_(H35C1)_SIMULATED
Lamps: 1 x LG H35C1

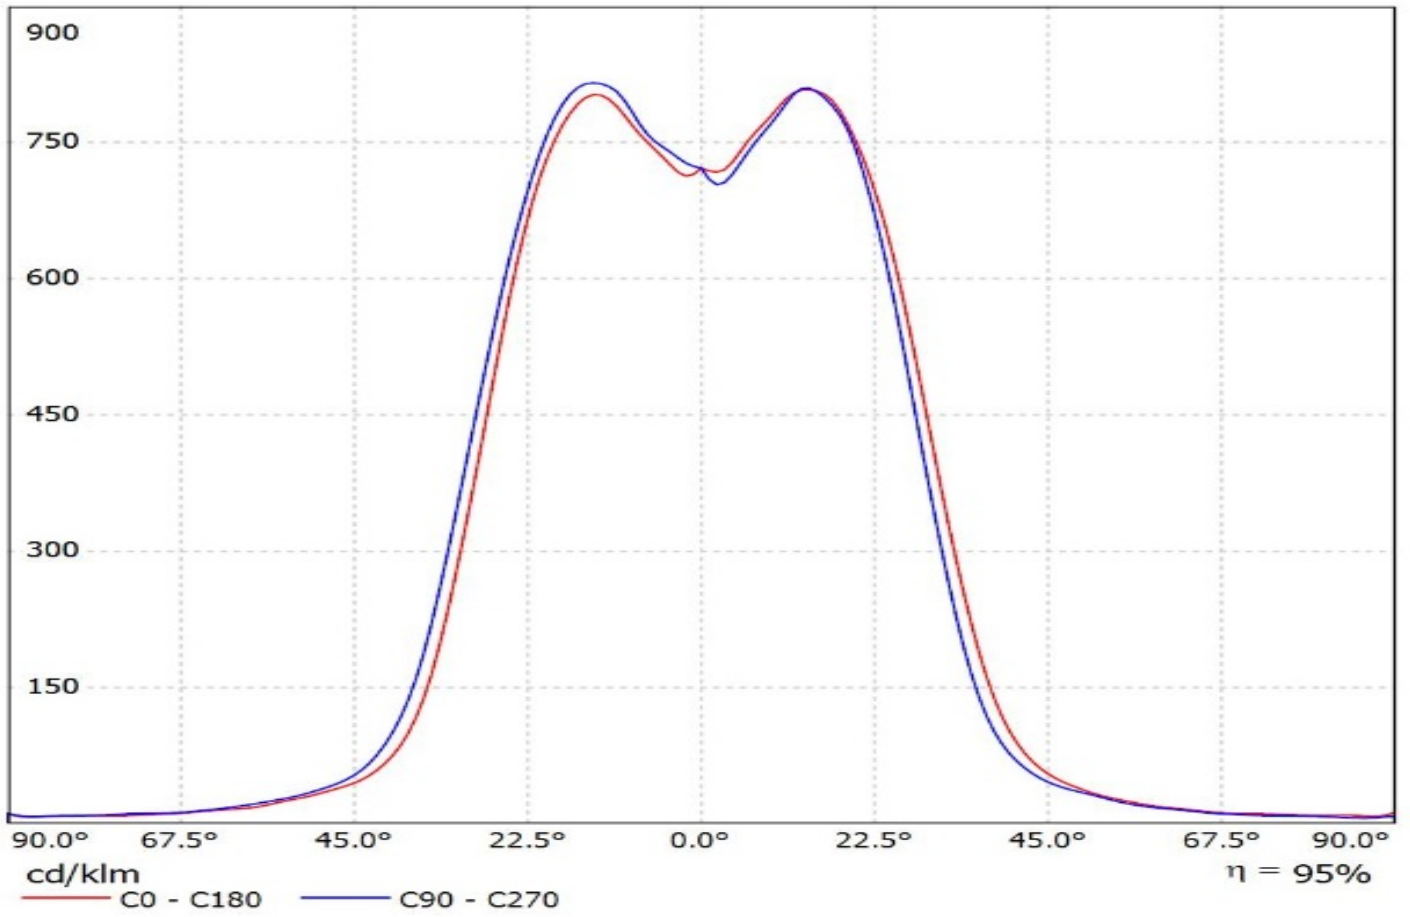


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(LUXEON_T) Eff.94.0%
Lamps: 1 x LUXEON_T_6x2_(LXH8-FW30)_1062.6lm@250mA_P=8.46572W_I=249.8mA

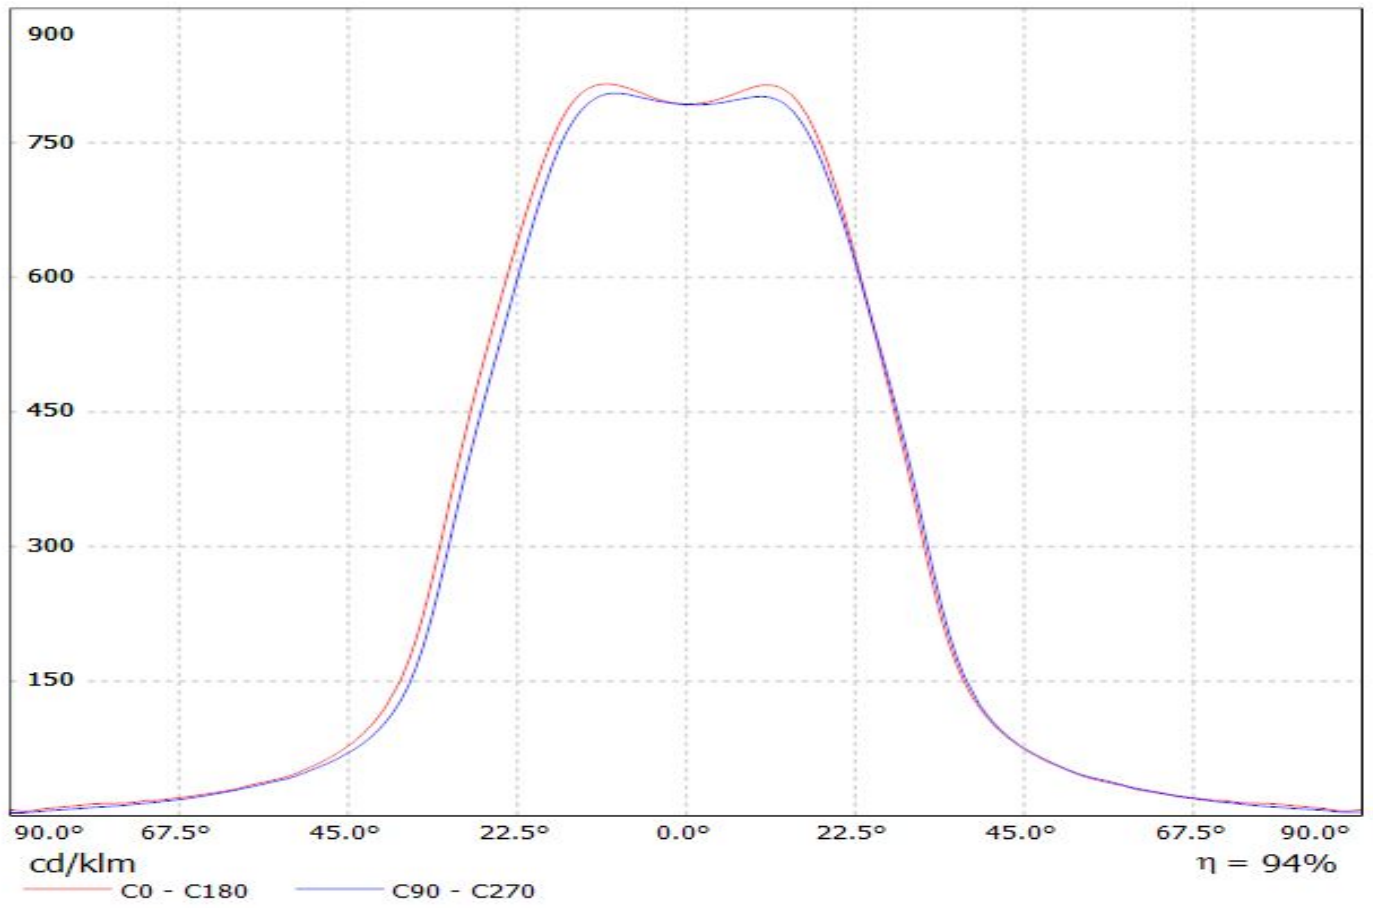


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(REBEL-ES) Eff.94.0%
Lamps: 1 x Luxeon_Rebel-ES_2x6_864.2lm@250mA_P=9.03127W_I=249.8mA

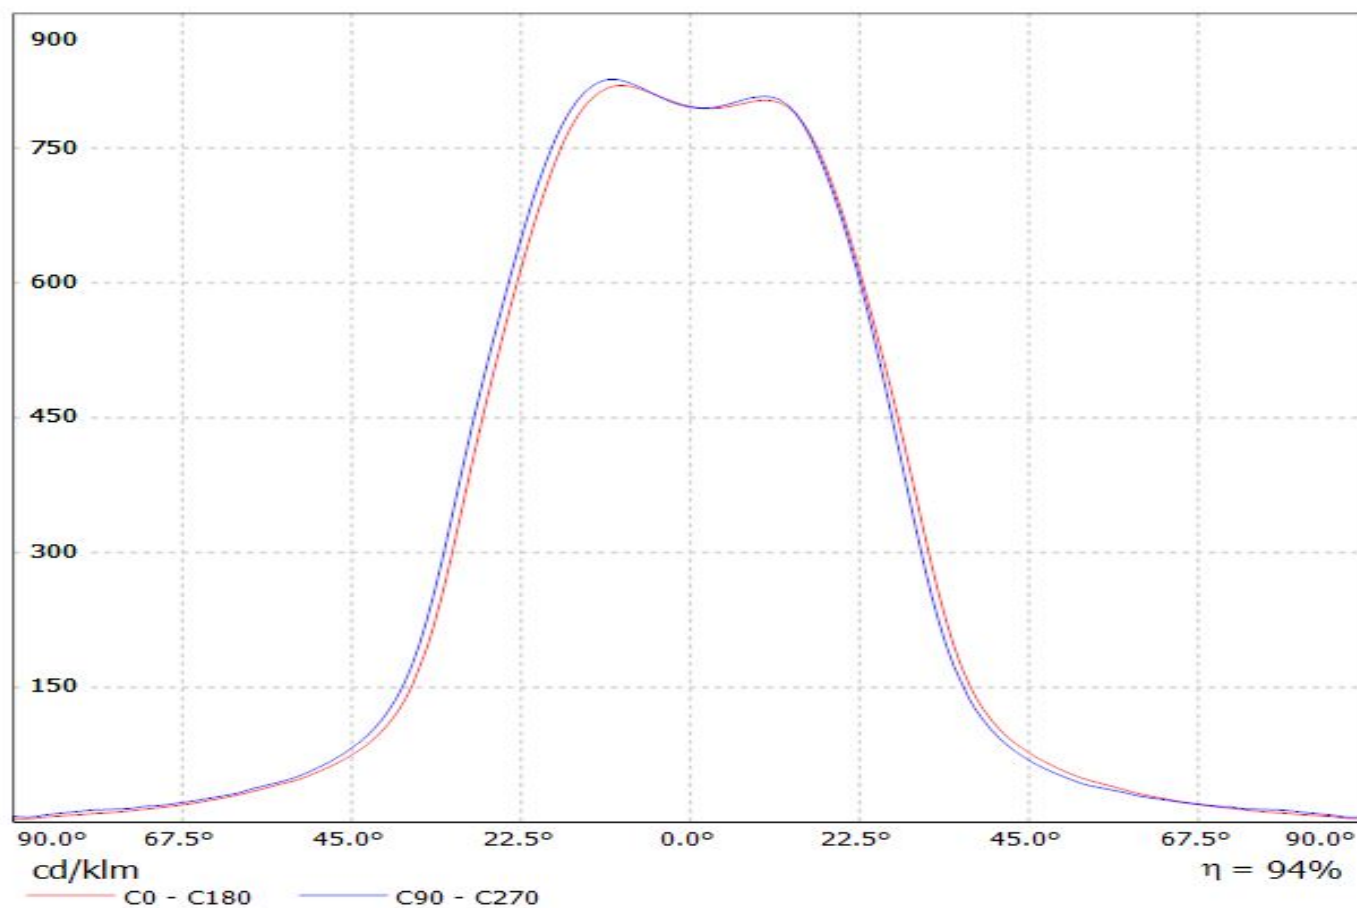


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(LUXEON-R) Eff 94.0%
Lamps: 1 x Luxeon_R_6x2_1154lm@250mA_P=8.29161W_I=249.8mA

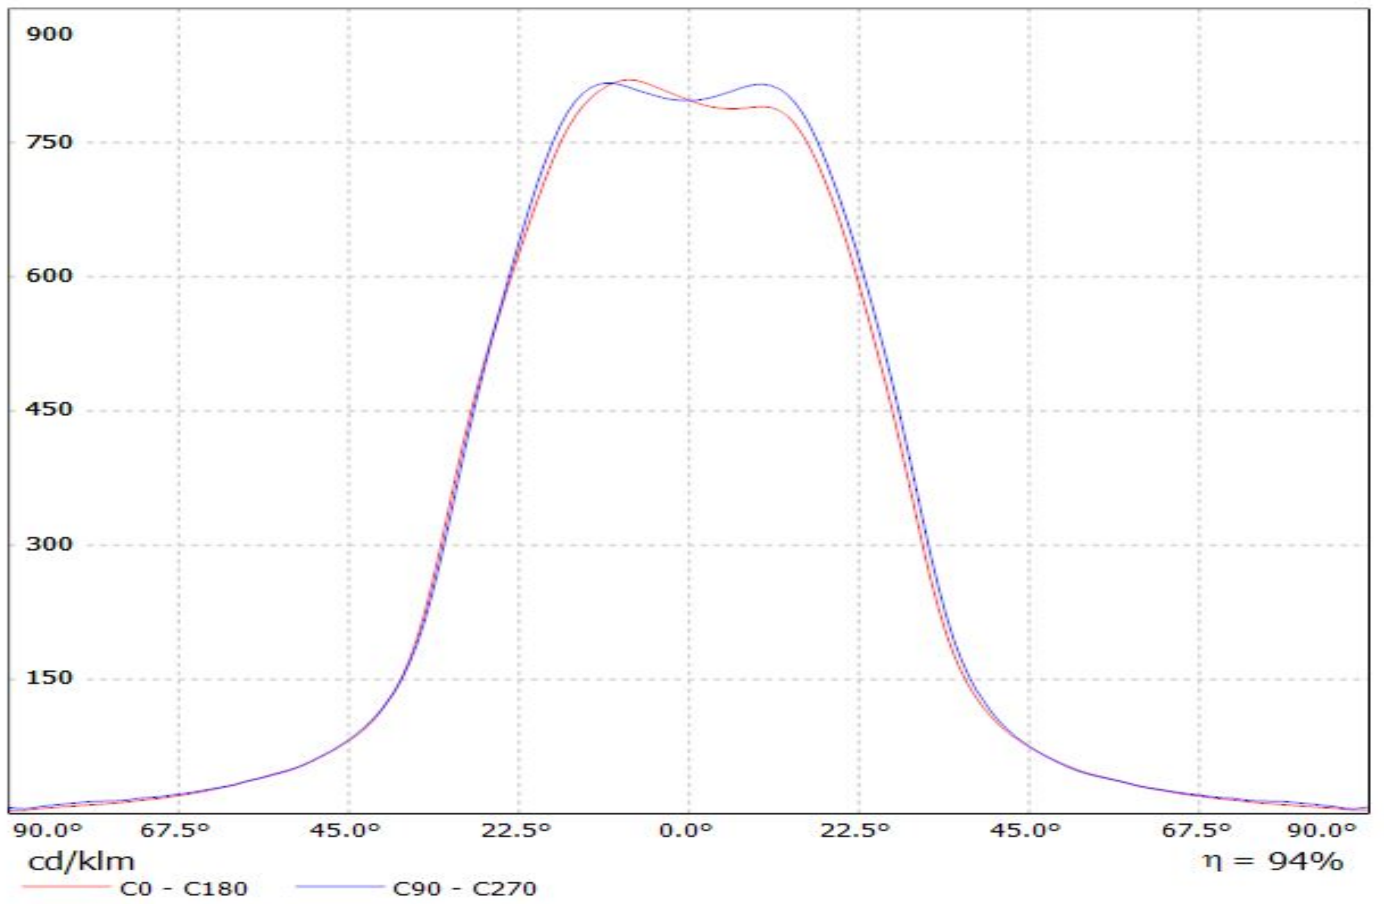

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(LUXEON_Z_ES) Eff.94.0%
Lamps: 1 x LUXEON_Z_ES_990.2lm@250mA_P=8.31159W_I=249.8mA

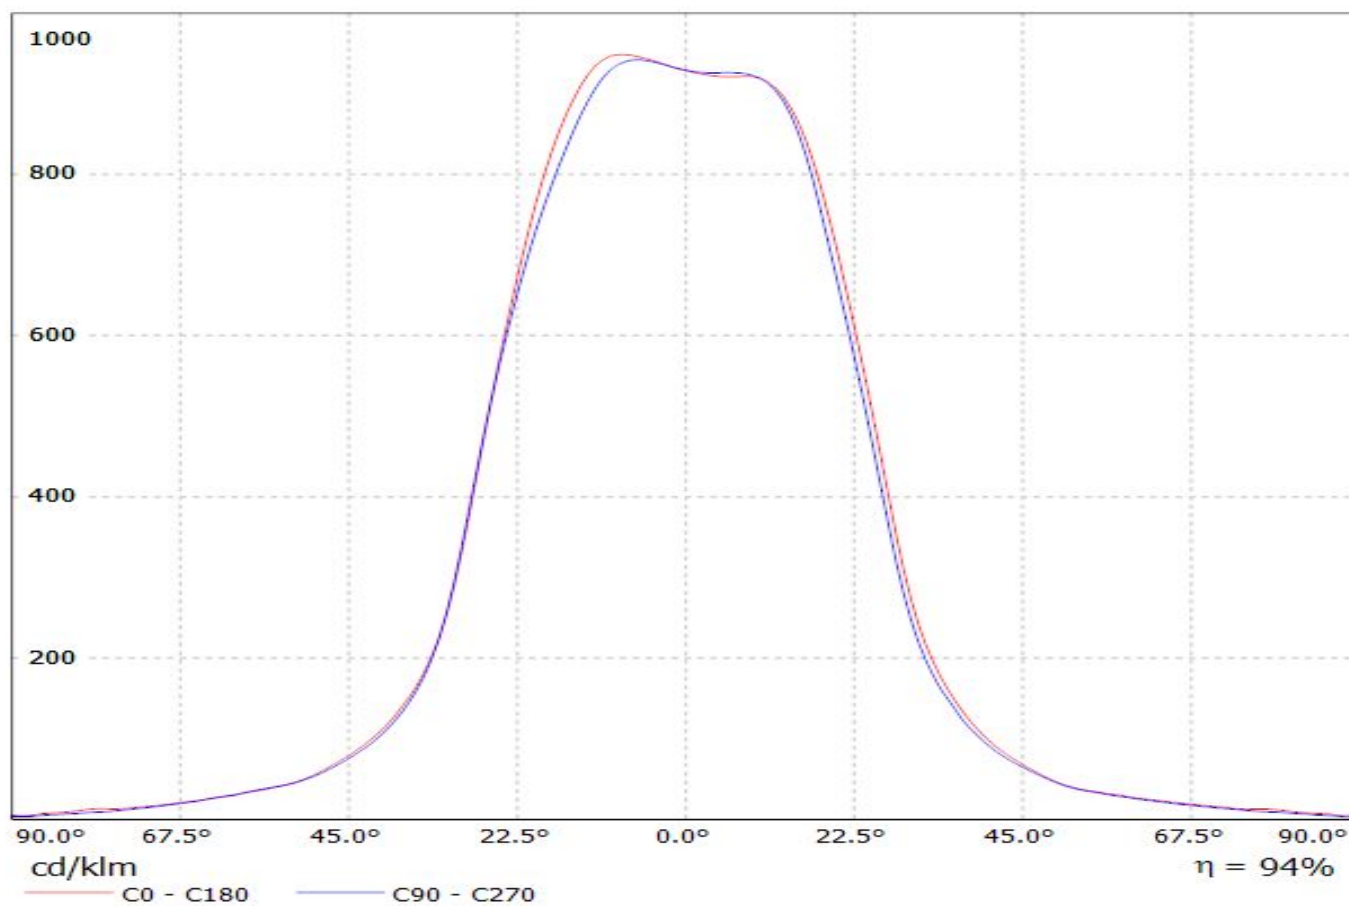


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(Luxeon_TX)
Lamps: 1 x Luxeon_TX_2x6_1301.4lm@250mA_P=8.26138W_I=249.8mA

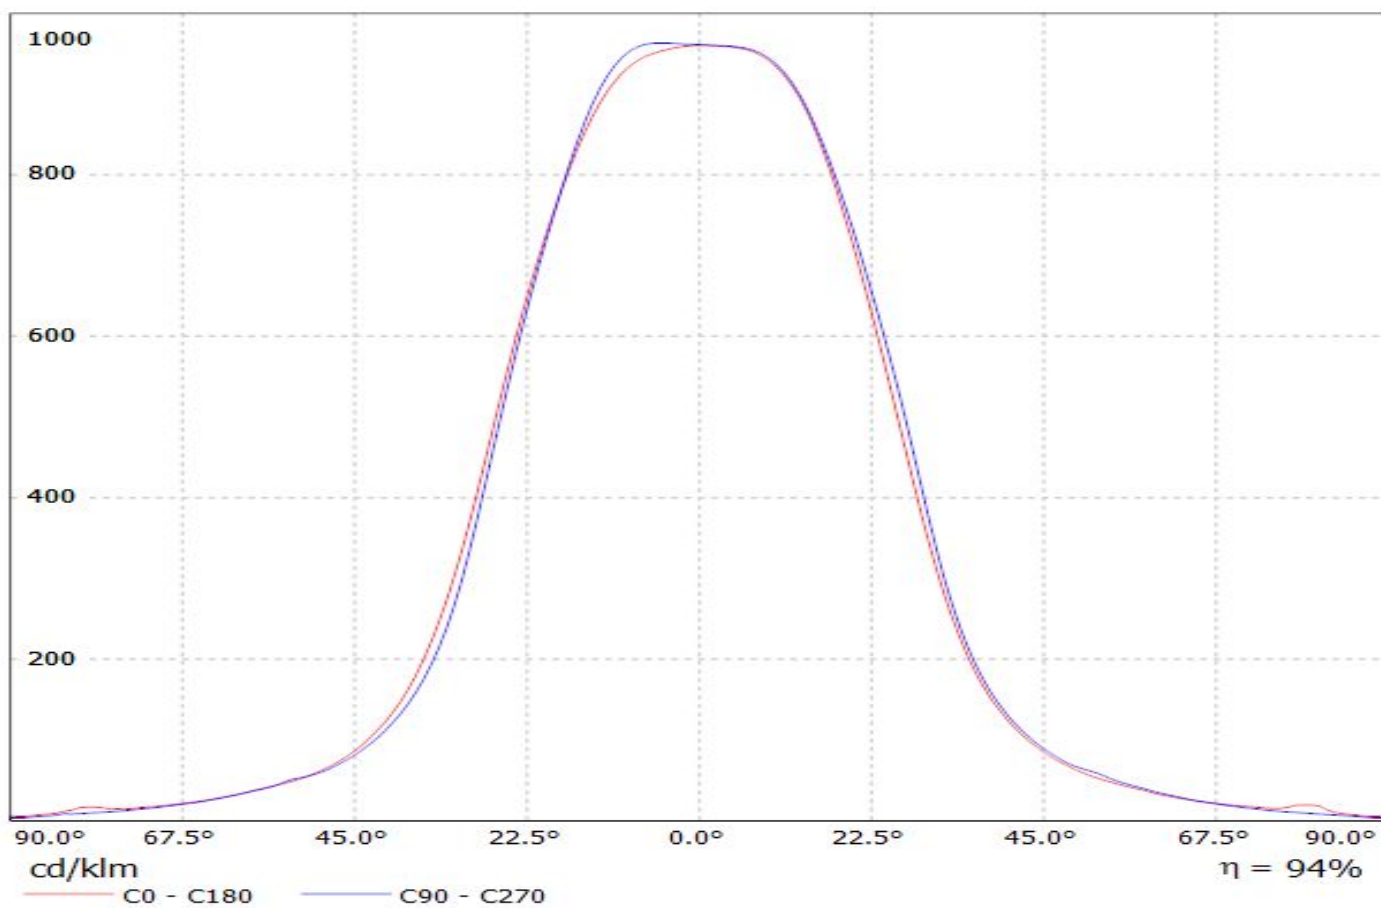


Luminaire: Ledil CS14130_HB-IP-2X6-W_(XR-TX)


Lamps: 1 x Luxeon_XR-TX_1376.41lm@250mA_P=8.3920W_I=0.250A

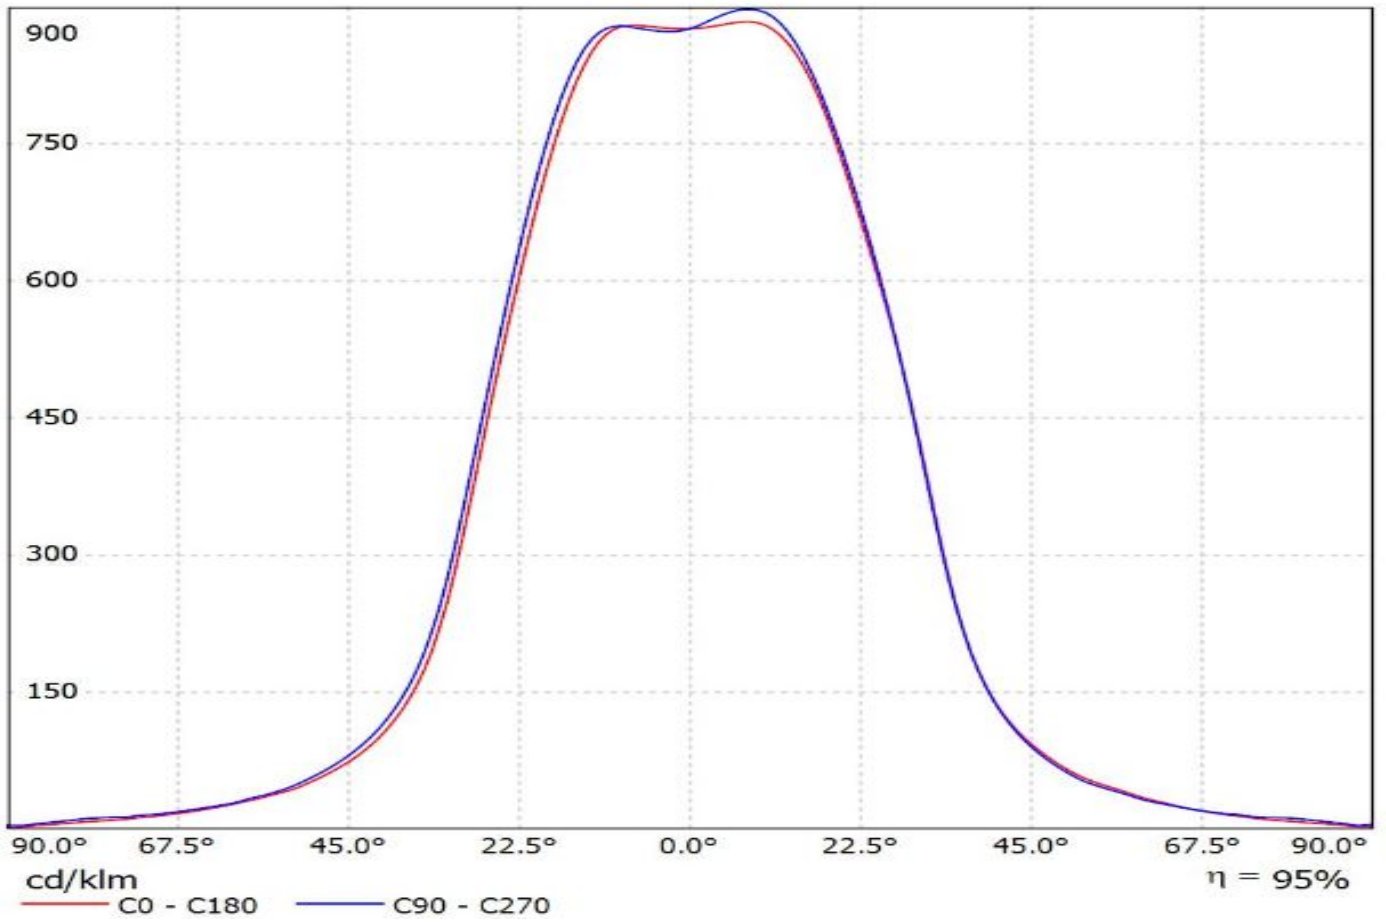


Luminaire: Ledil CS14130_HB-IP-2X6-W_(NVSL219CT)
Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

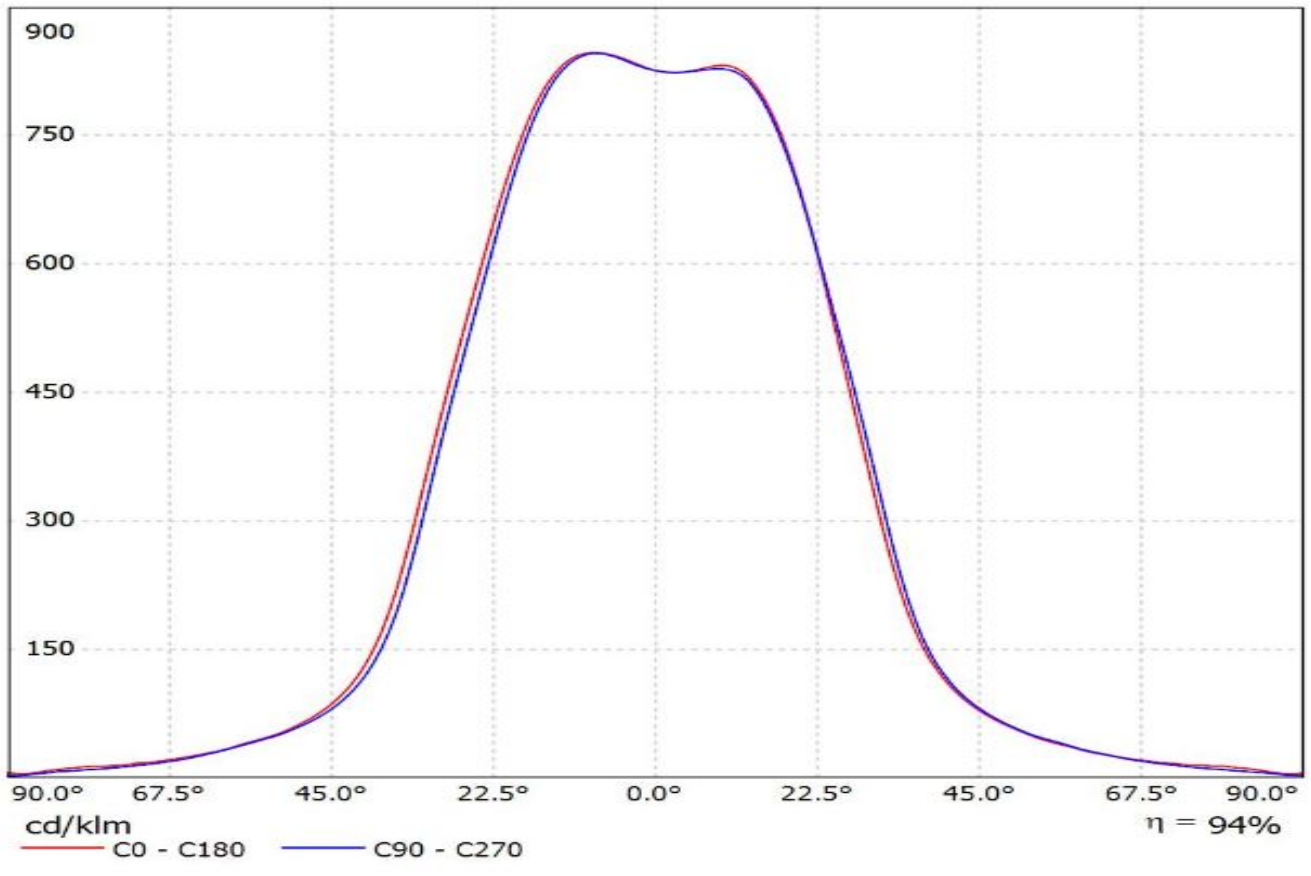


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(Nichia_E21)
Lamps: 1 x Nichia_NVSWE21A_583.232lm@600mA_P=3.51742W_I=0.600A

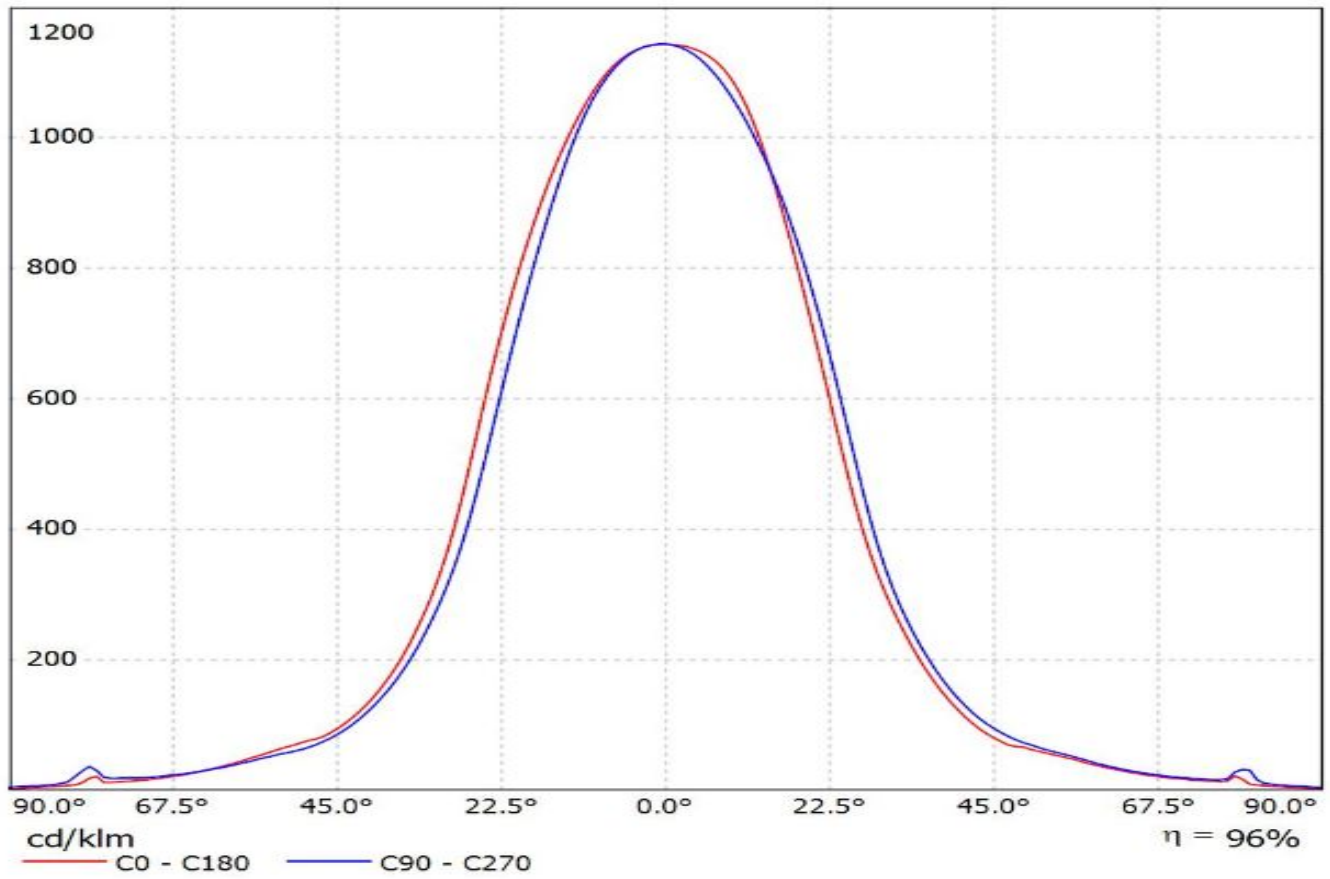


Luminaire: Ledil Oy CS14130_HB-IP-2X6-W-DURIS-S8_SIMULATED
Lamps: 1 x DURIS-S8

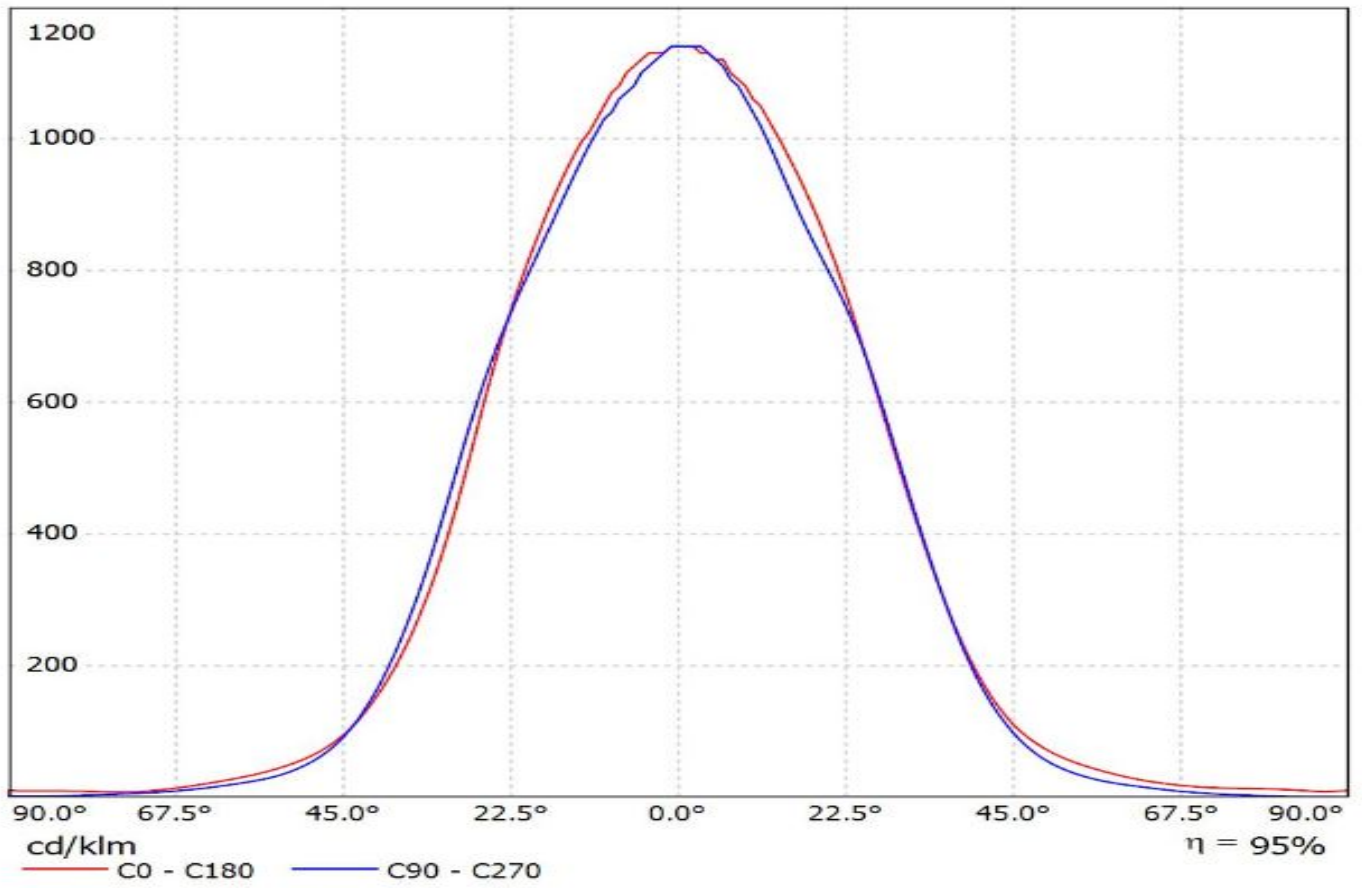

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(Z5M1) Eff.94.0%
Lamps: 1 x SEOUL_Z5M1_2x6_(SZ5-M1-WW-C8)_1177.2lm@250mA_P=8.5619W_I=249.8mA

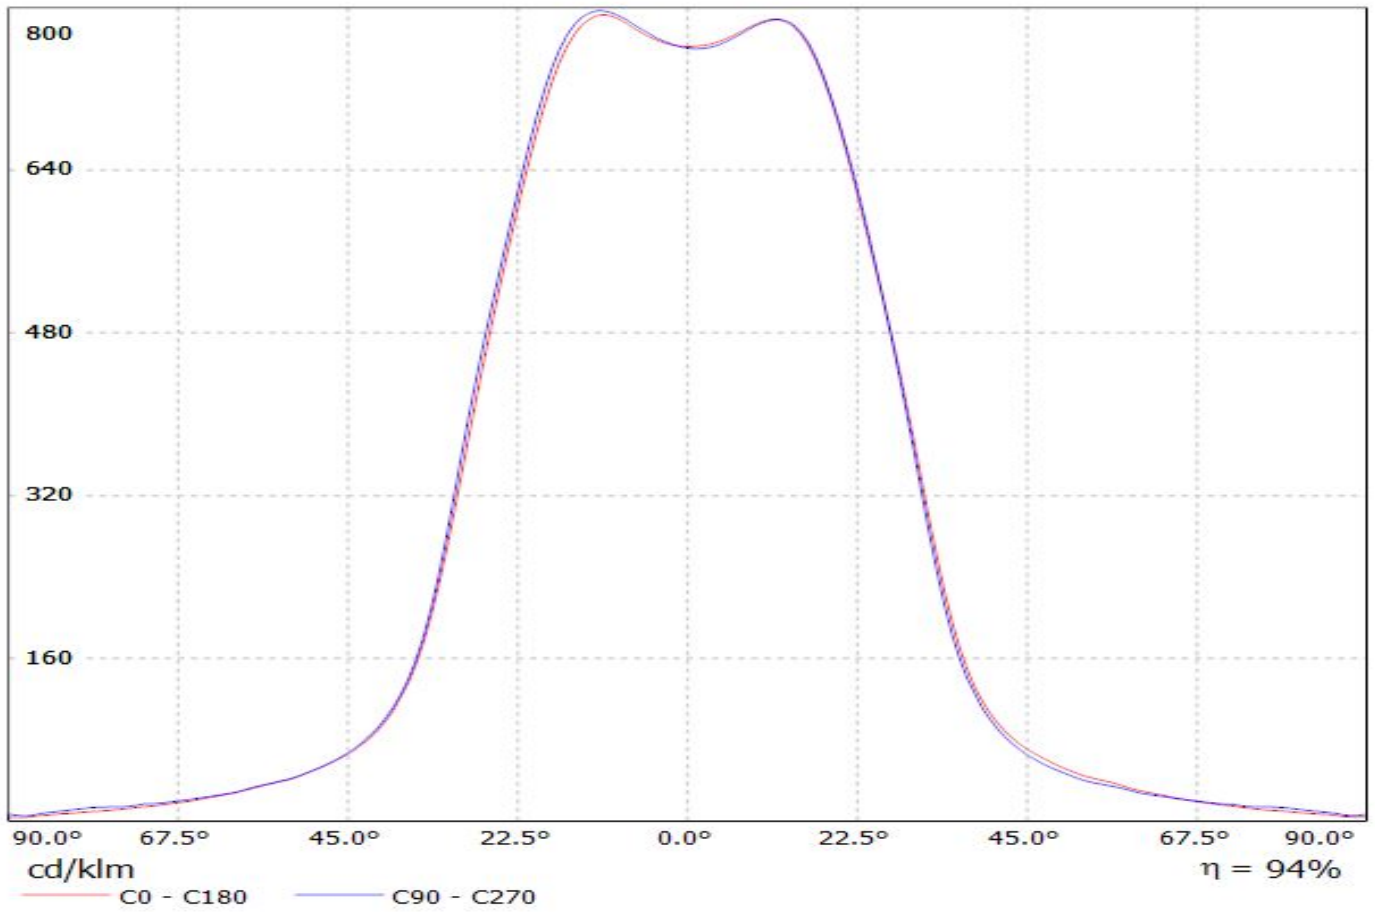


Luminaire: Ledil Oy CS14130_HB-IP-2X6-W_MJT4040_SIMULATED
Lamps: 1 x

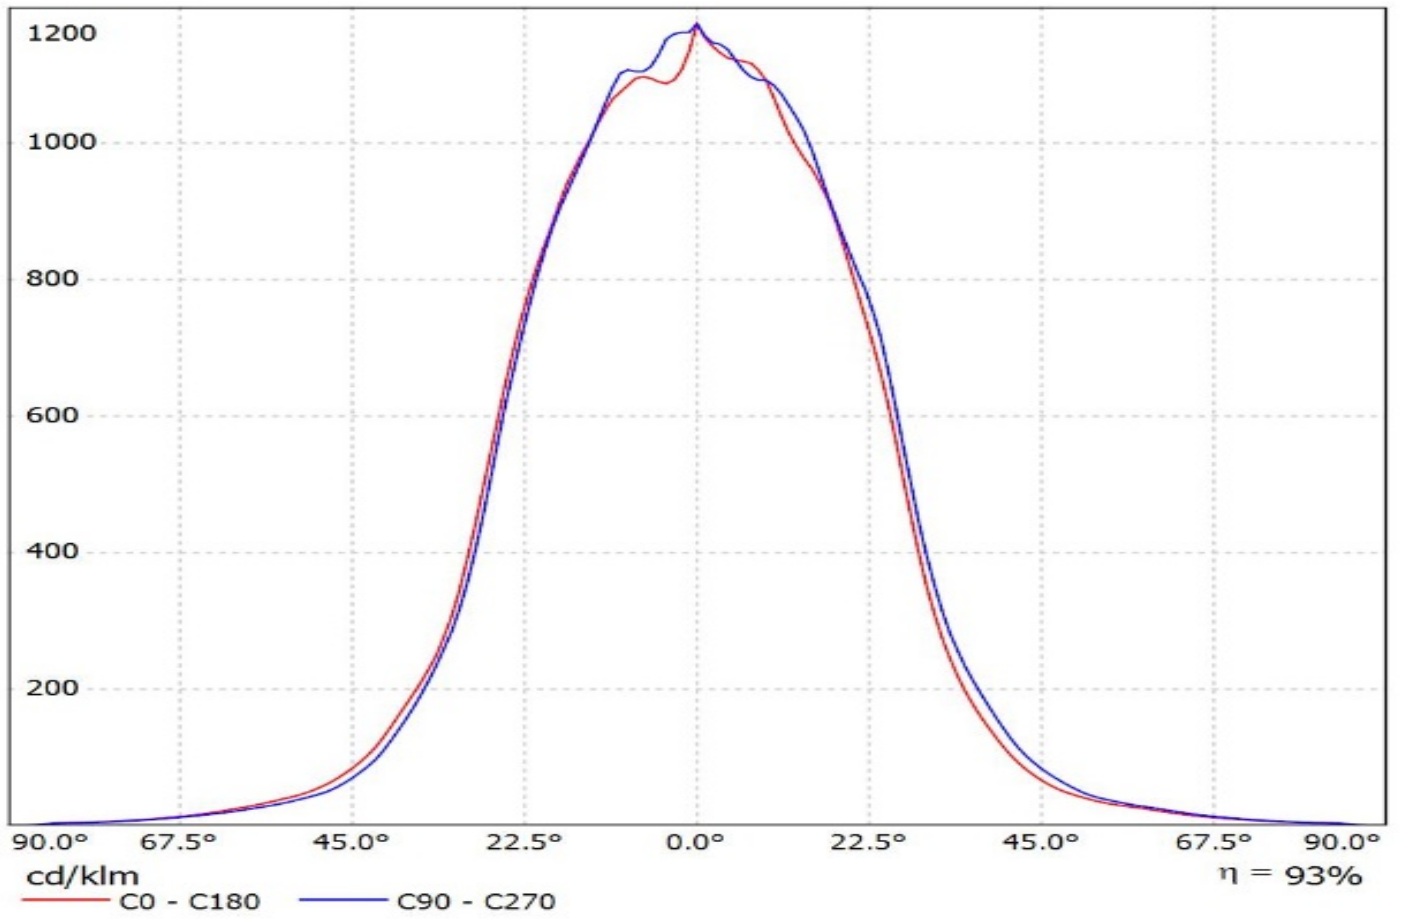


Ledil Oy CS14130HB-IP-2X6-W / LDC (Linear)

Luminaire: Ledil Oy CS14130HB-IP-2X6-W
Lamps: 1 x SEOUL_Z5M

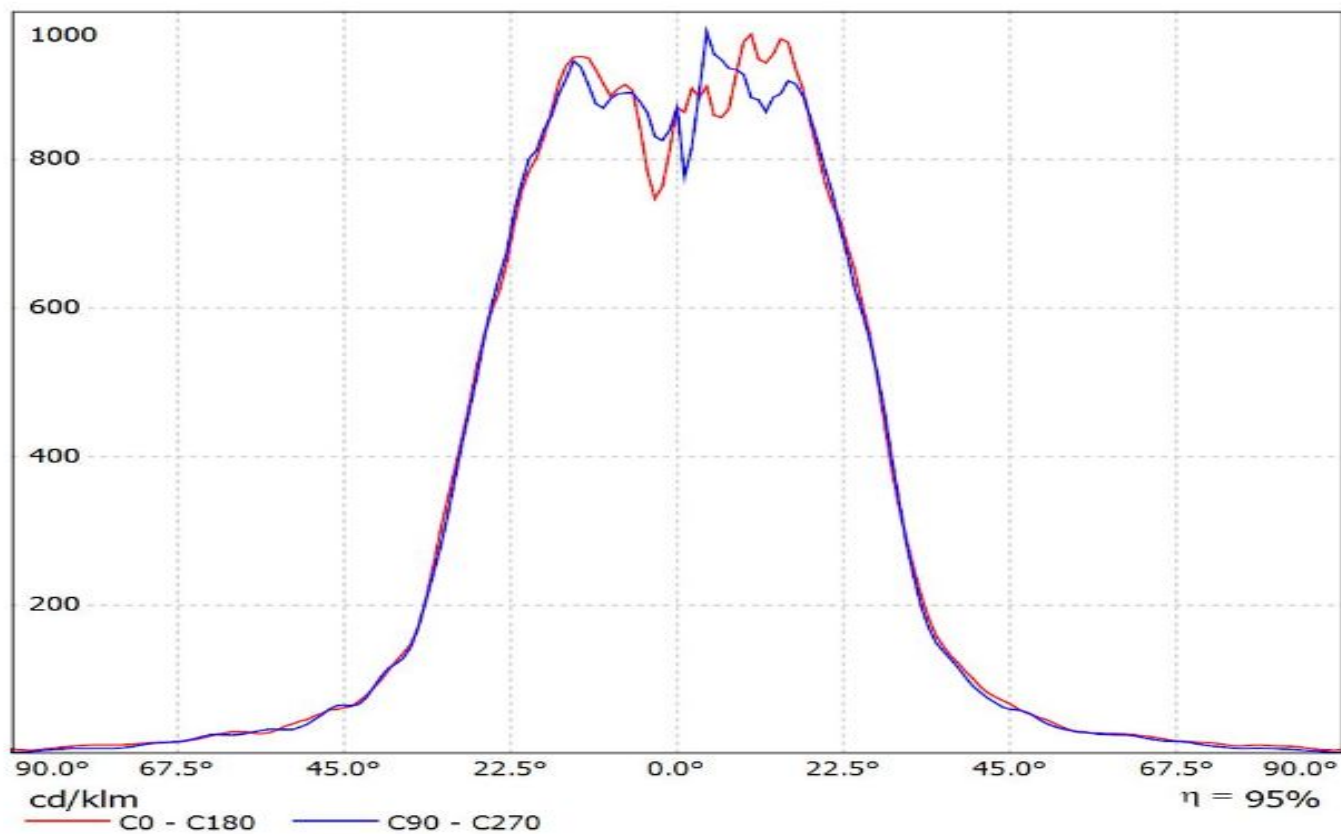

Luminaire: Ledil CS14130_HB-IP-2X6-W_(Z8Y22_PLUS)


Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(S28-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

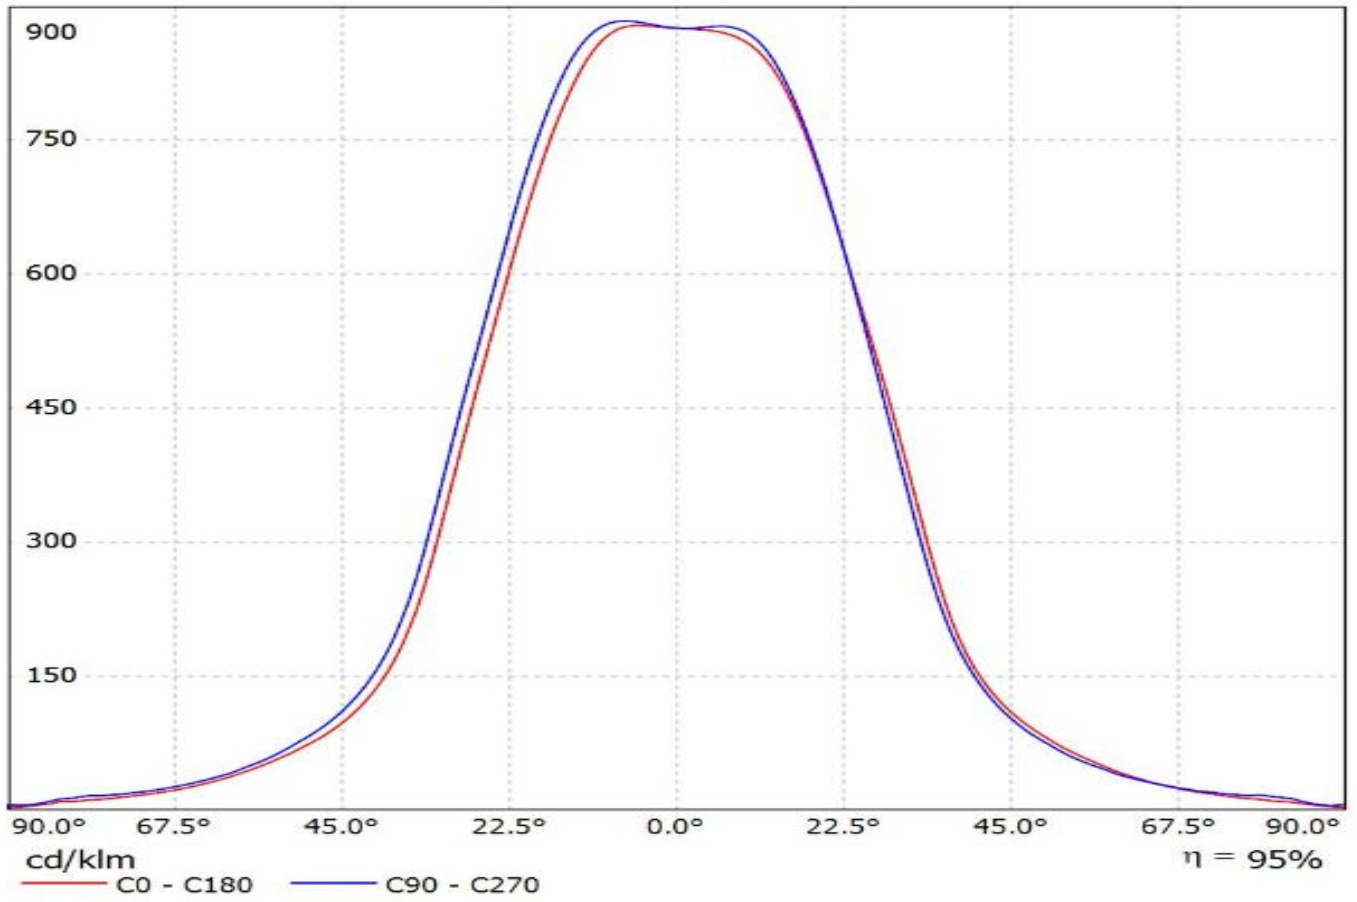

Ledil CS14130_HB-IP-2X6-W_(TL1L4) / LDC (Linear)


Luminaire: Ledil CS14130_HB-IP-2X6-W_(TL1L4)

Lamps: 1 x Toshiba_TL1L4_2x6_(TL1L4-DW0)_1263.19lm@250mA_CCT=6500K_P=8.5W_I=0.25A

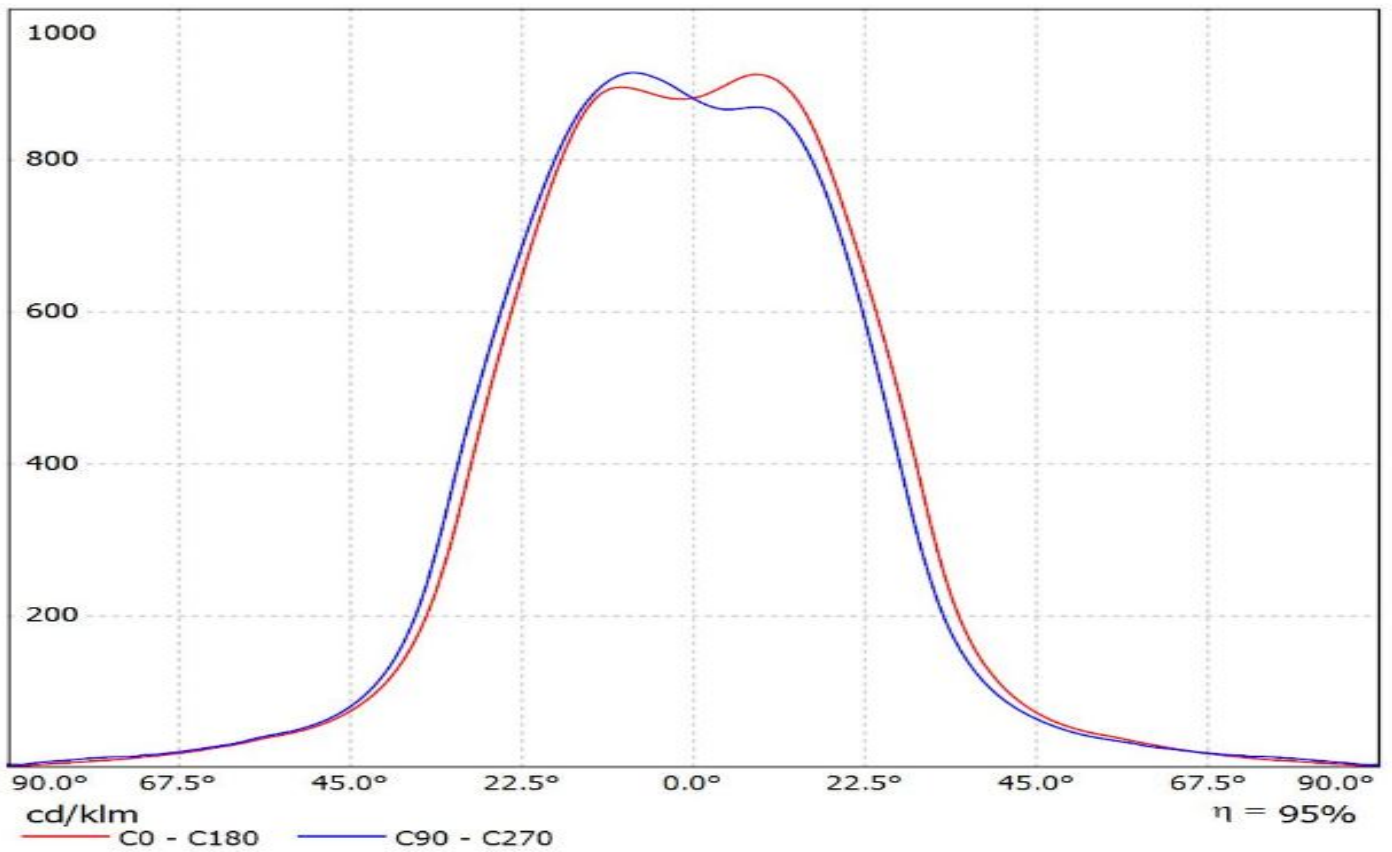

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XT-E)

Lamps: 1 x CREE_XT-E_6x2_(XTEAWT-00-0000-000000HE4)_1253.92lm@250mA_P=8.86265W_I=249.8mA

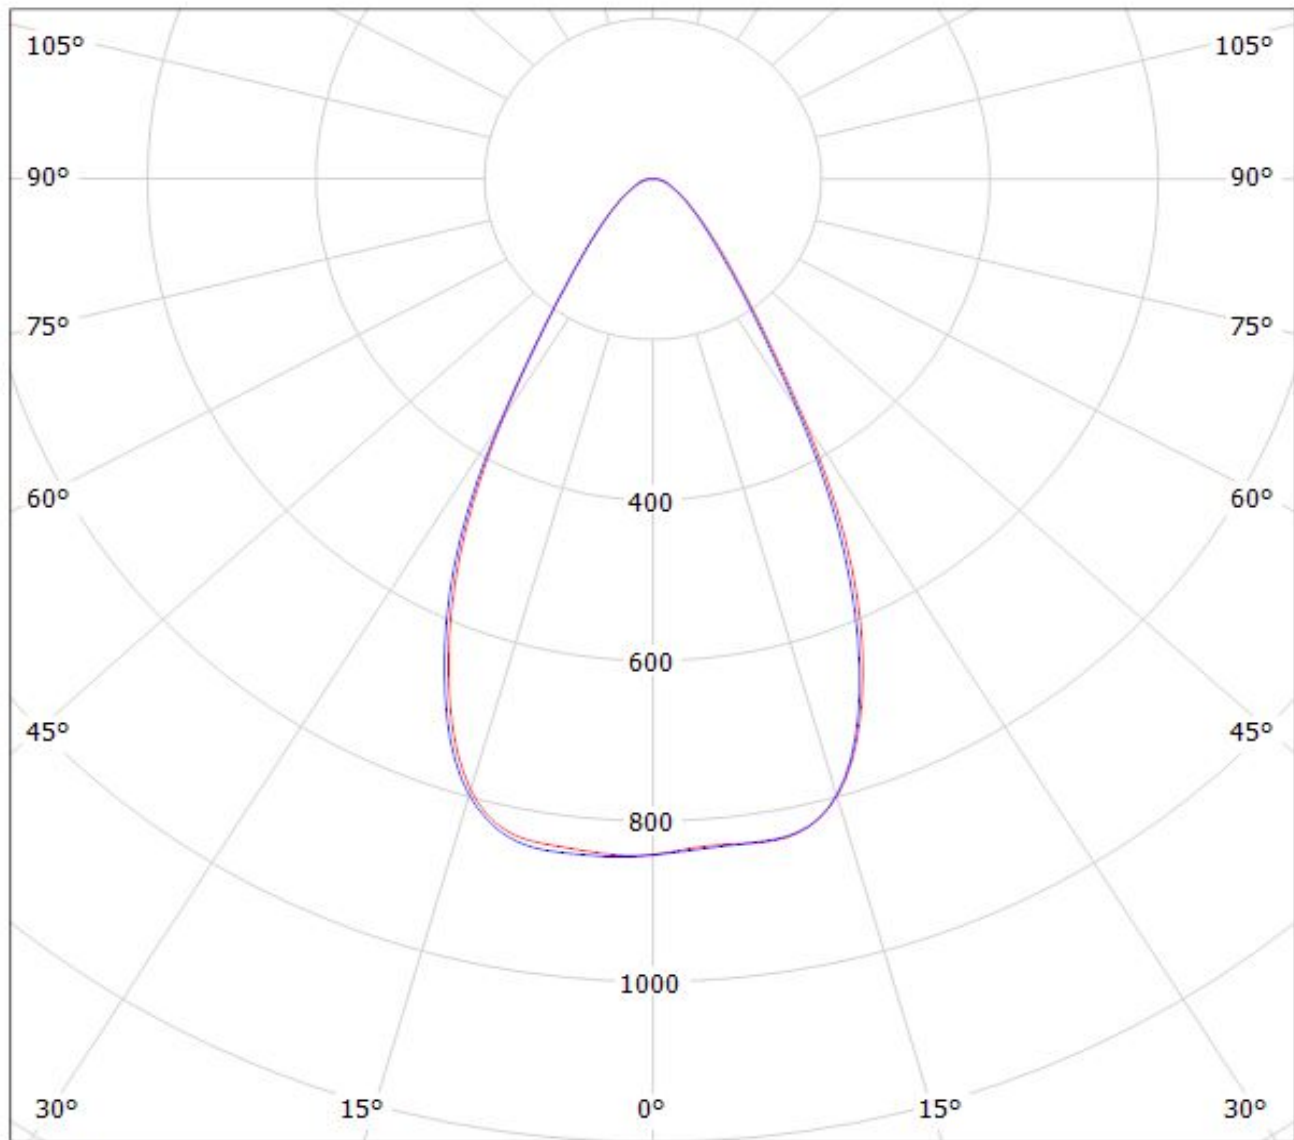


cd/klm

$\eta = 96\%$

— C0 - C180

— C90 - C270

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XM-L2) Eff.94.0%
Lamps: 1 x CREE_XM-L2_2x6_1197.78lm@250mA_P=8.38555W_I=254.1mA

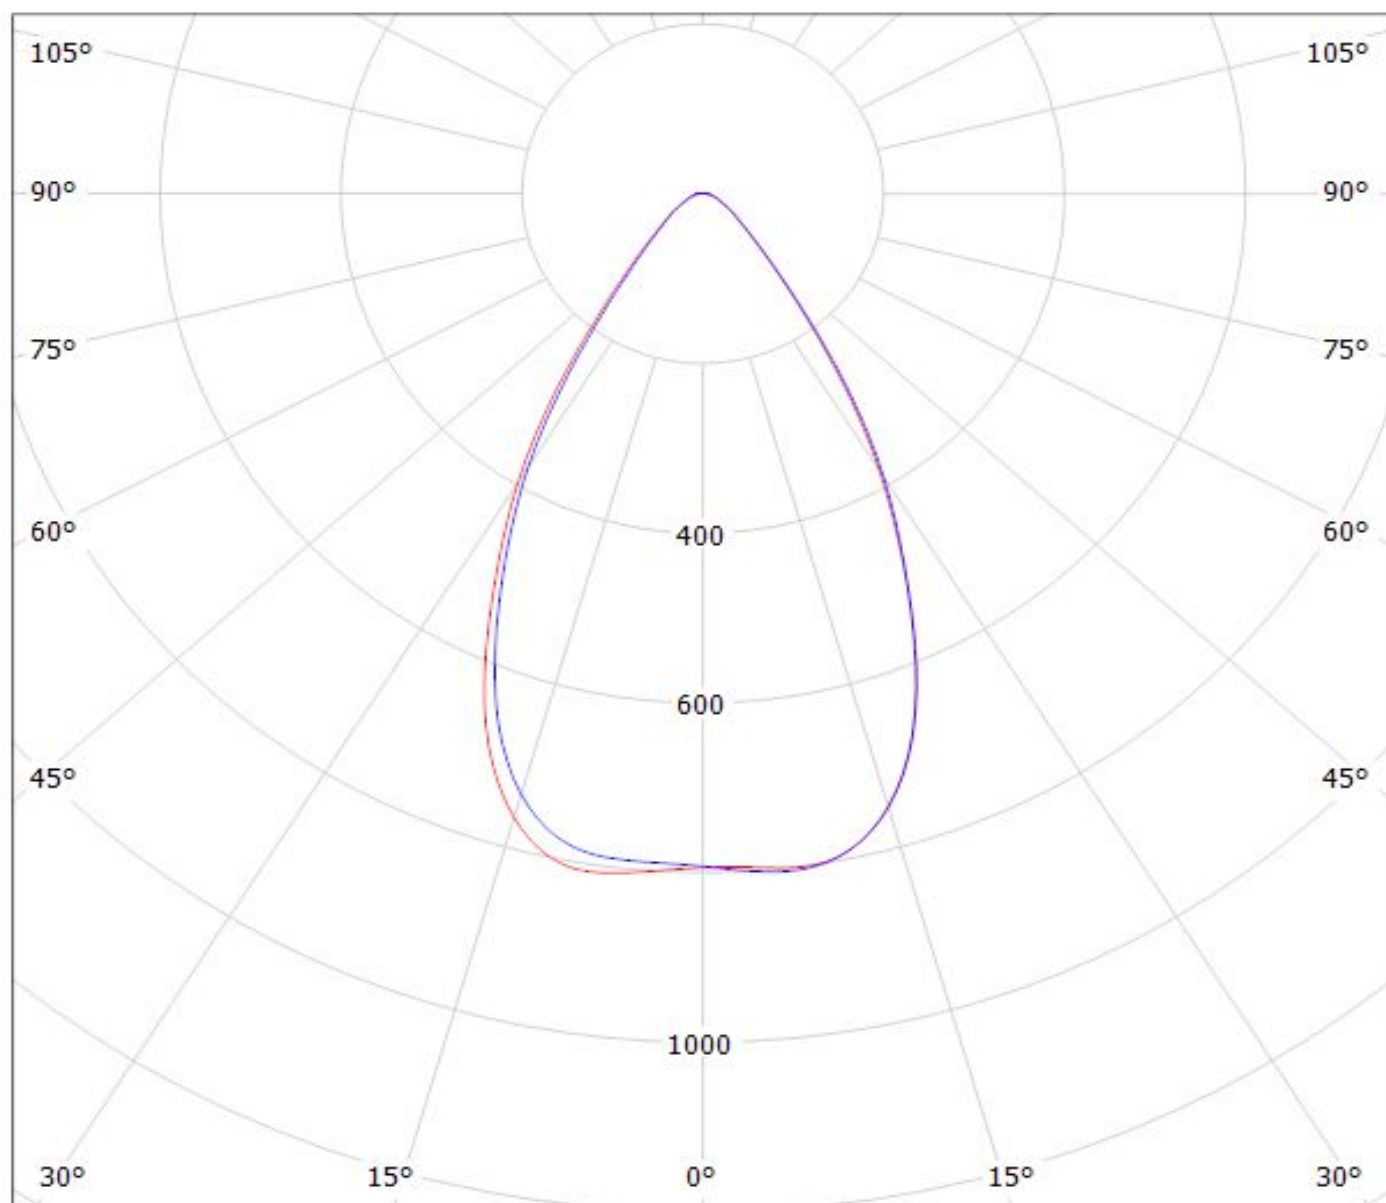


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$


Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XP-G2) Eff.93.2%
Lamps: 1 x CREE_XP-G2_1303lm@250mA_P=8.58363W_I=249.8mA

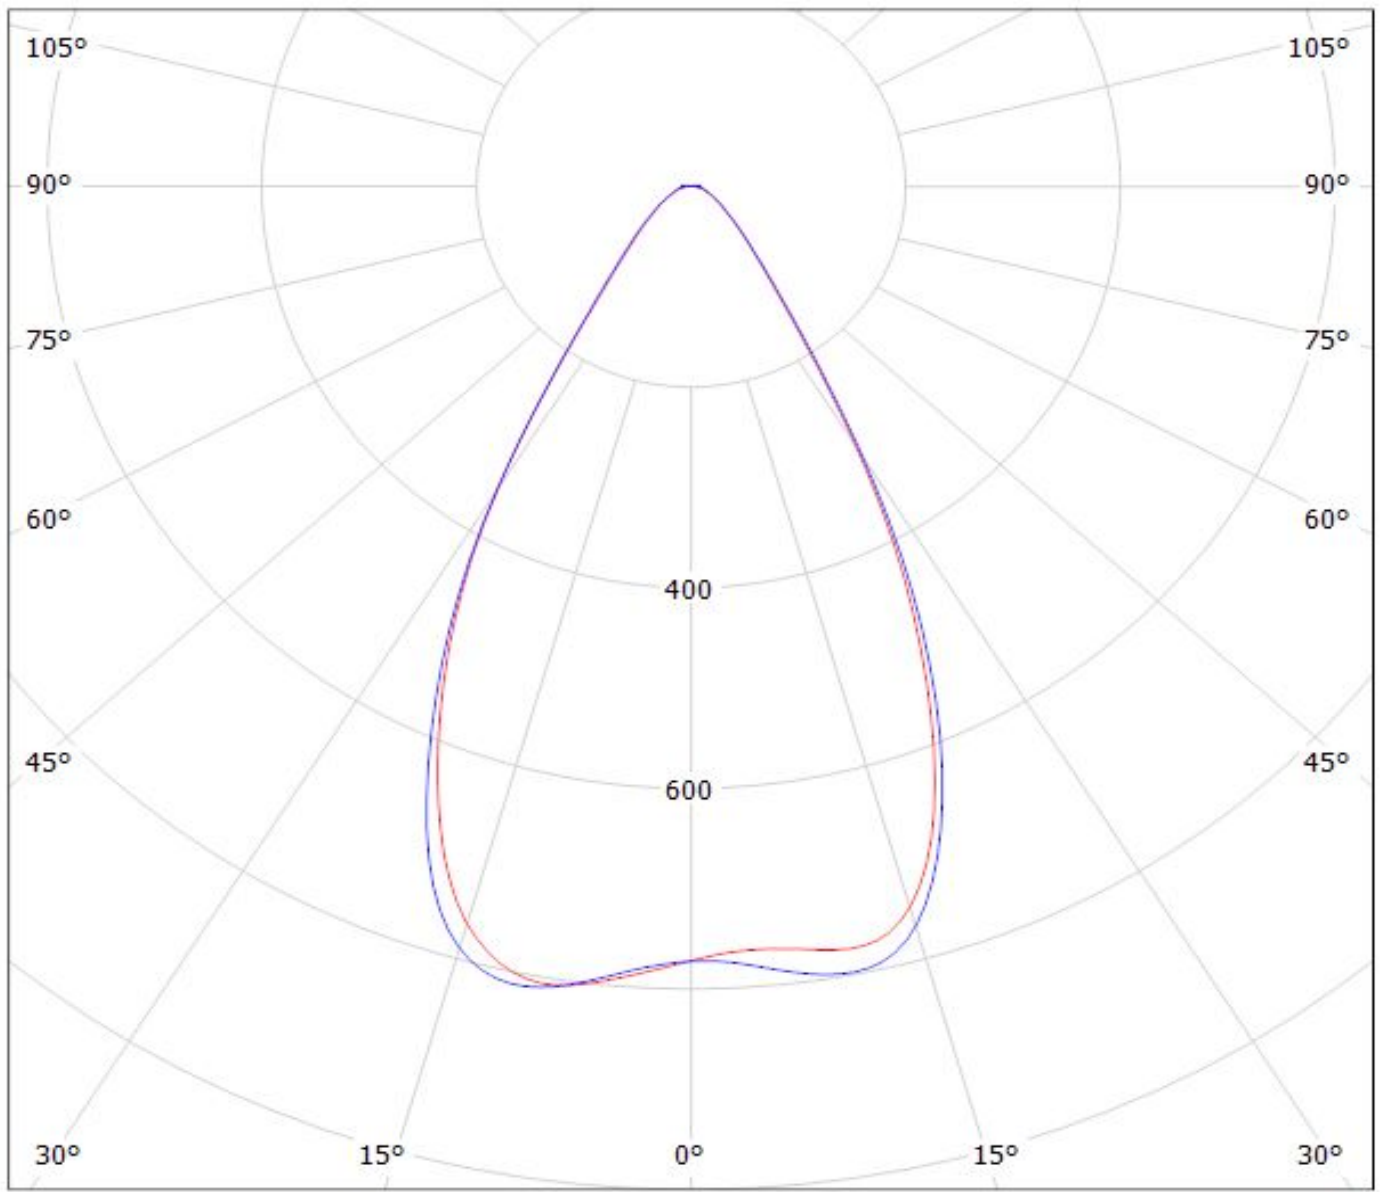

cd/klm
— C0 - C180 — C90 - C270

$\eta = 93\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XP-G) Eff.94.0%
Lamps: 1 x CREE_XP-G_6x2_799.2lm@250mA_P=8.52542W_I=249.8mA

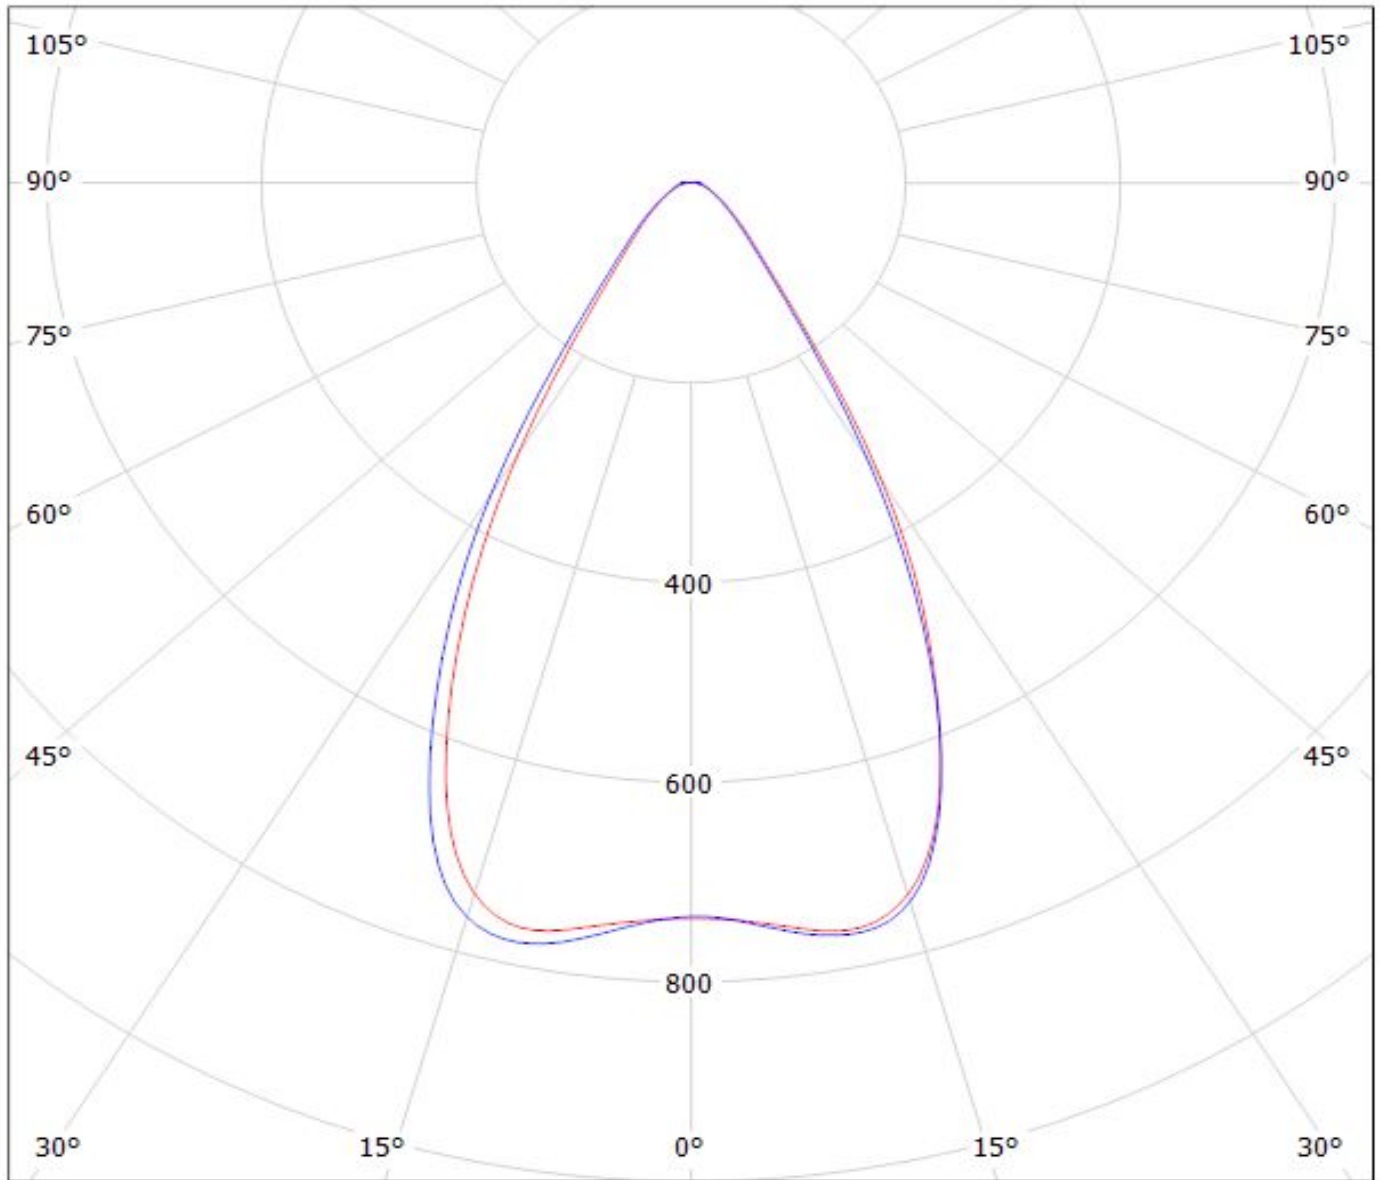


cd/klm
— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(XP-L)

Lamps: 1 x CREE_XP-L_2x6_(XPLAWT-0-7A3-U50-0H-0001)_1253.88lm@250mA_P=8.22317W_I=249.8mA

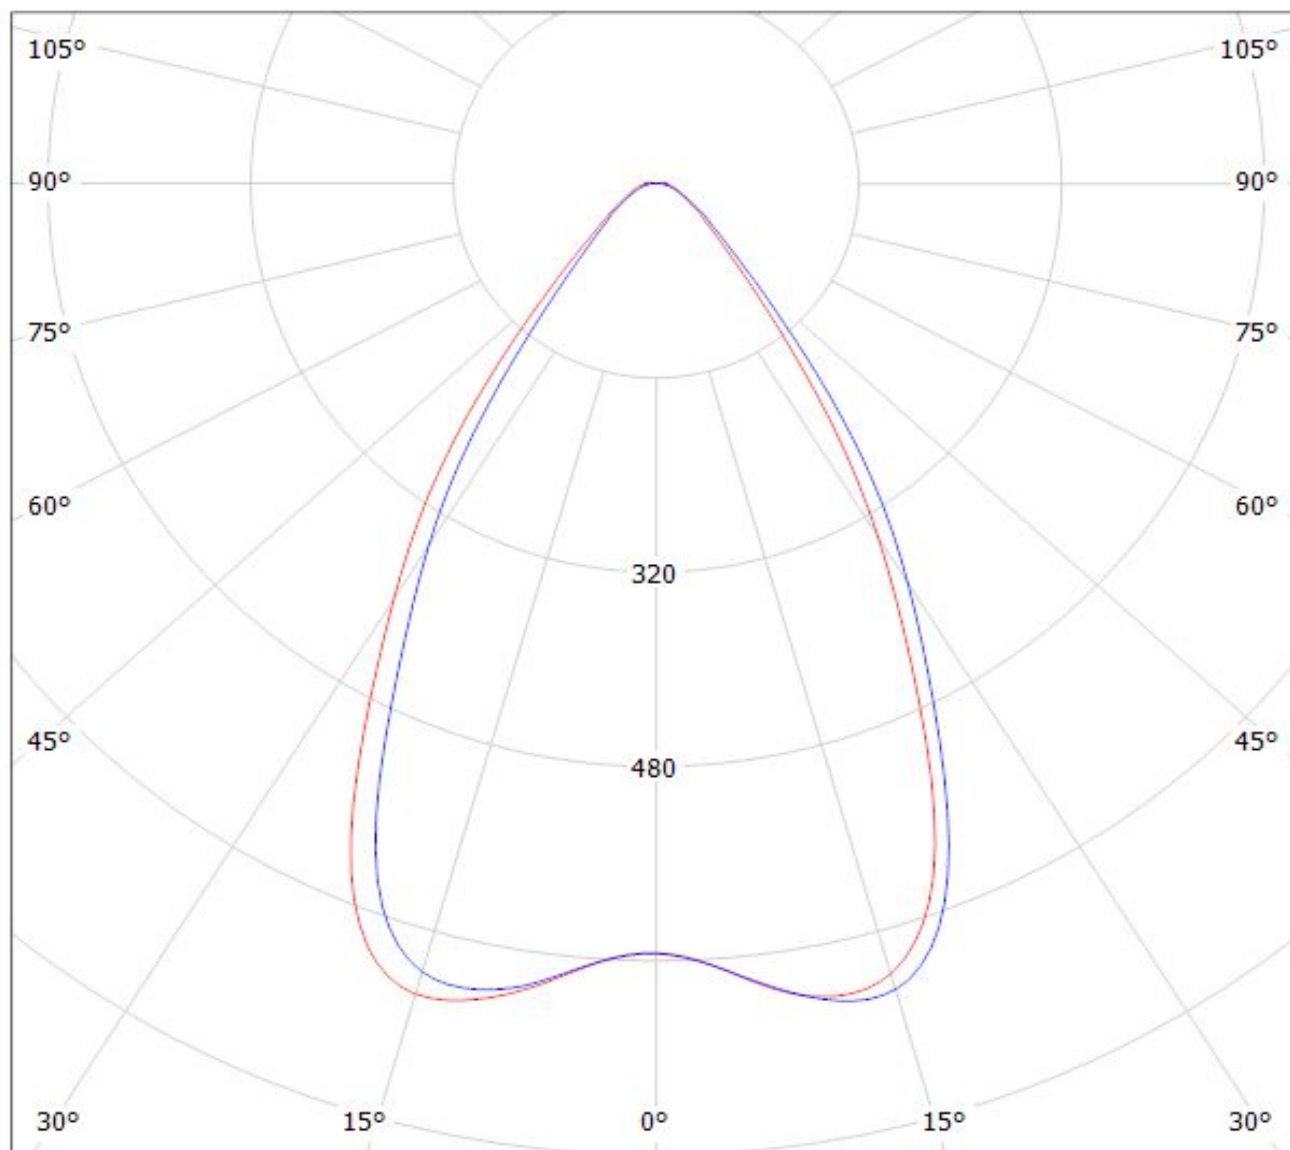

cd/klm


$\eta = 95\%$

— C0 - C180

— C90 - C270

Luminaire: Ledil CS14130_HB-IP-2X6-W_(XP-G3)

Lamps: 1 x Cree_XP-G3_6x2_(XPGDWT-B1-6C1-S3-0-01)_1521.26lm@250mA_P=8.253W_I=0.25A

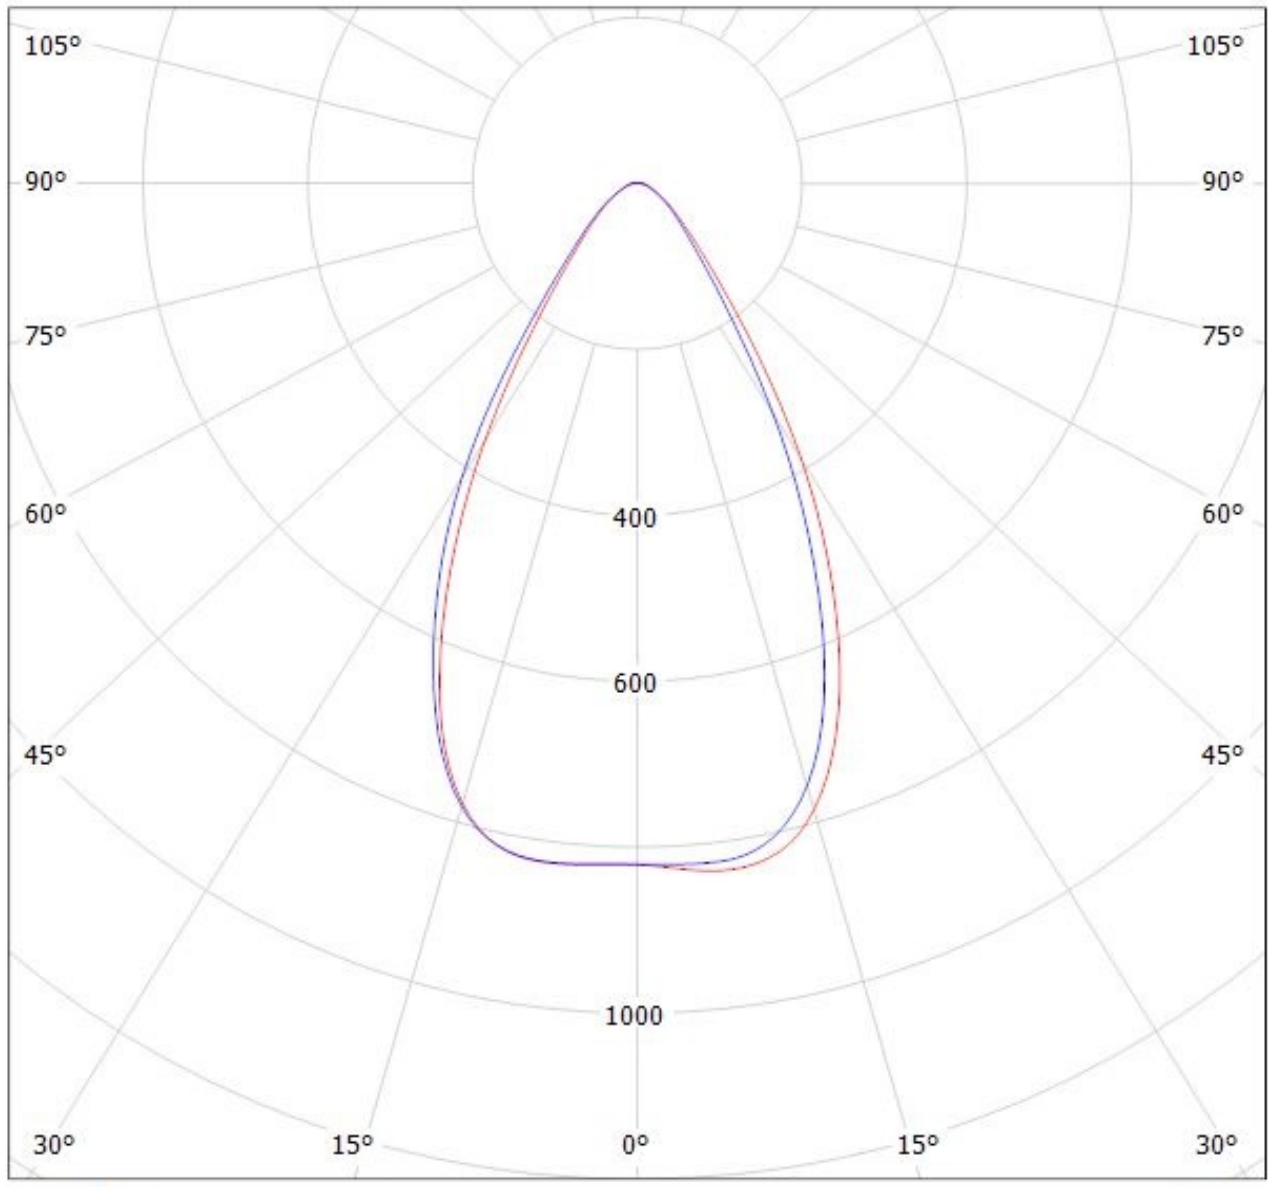


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: Ledil Oy CS14130_HB-IP-2X6-W-MH-B_SIMULATED
Lamps: 1 x Cree MH-B

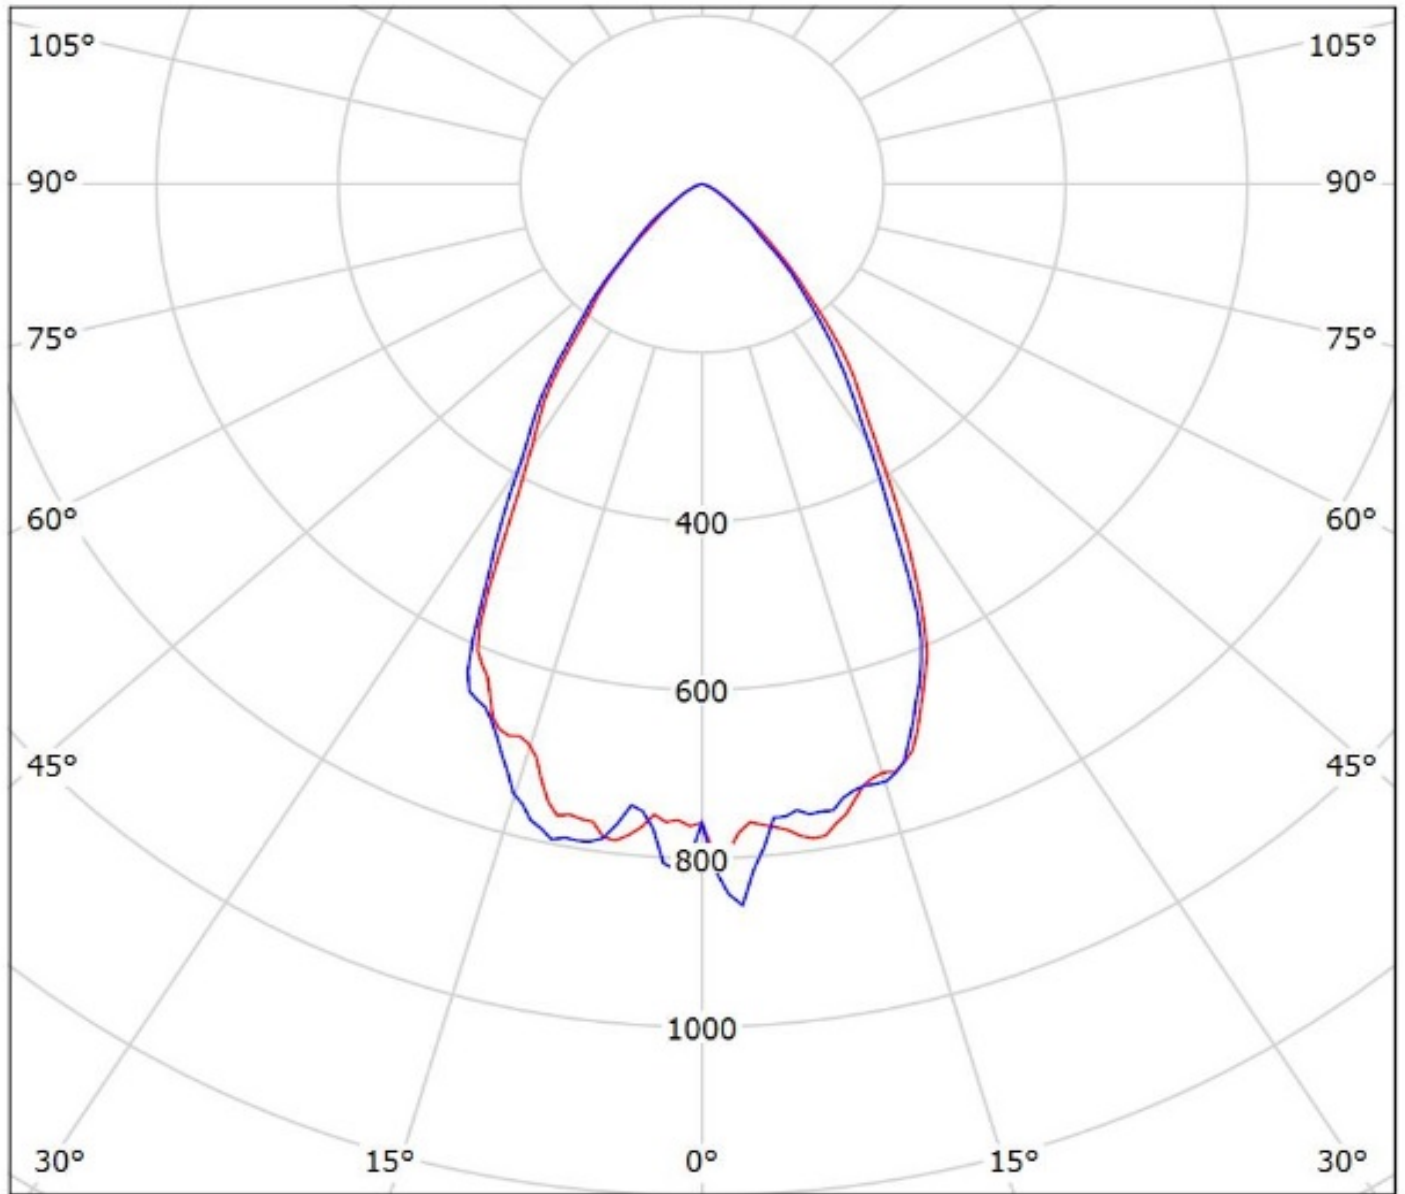


cd/klm

— C0 - C180 — C90 - C270

$\eta = 91\%$

Luminaire: Ledil CS14130_HB-IP-2X6-W_(XP-L2)

Lamps: 1 x Cree_XP-L2_2x6_1659.4lm@250mA_P=8.22525W_η=0.25A

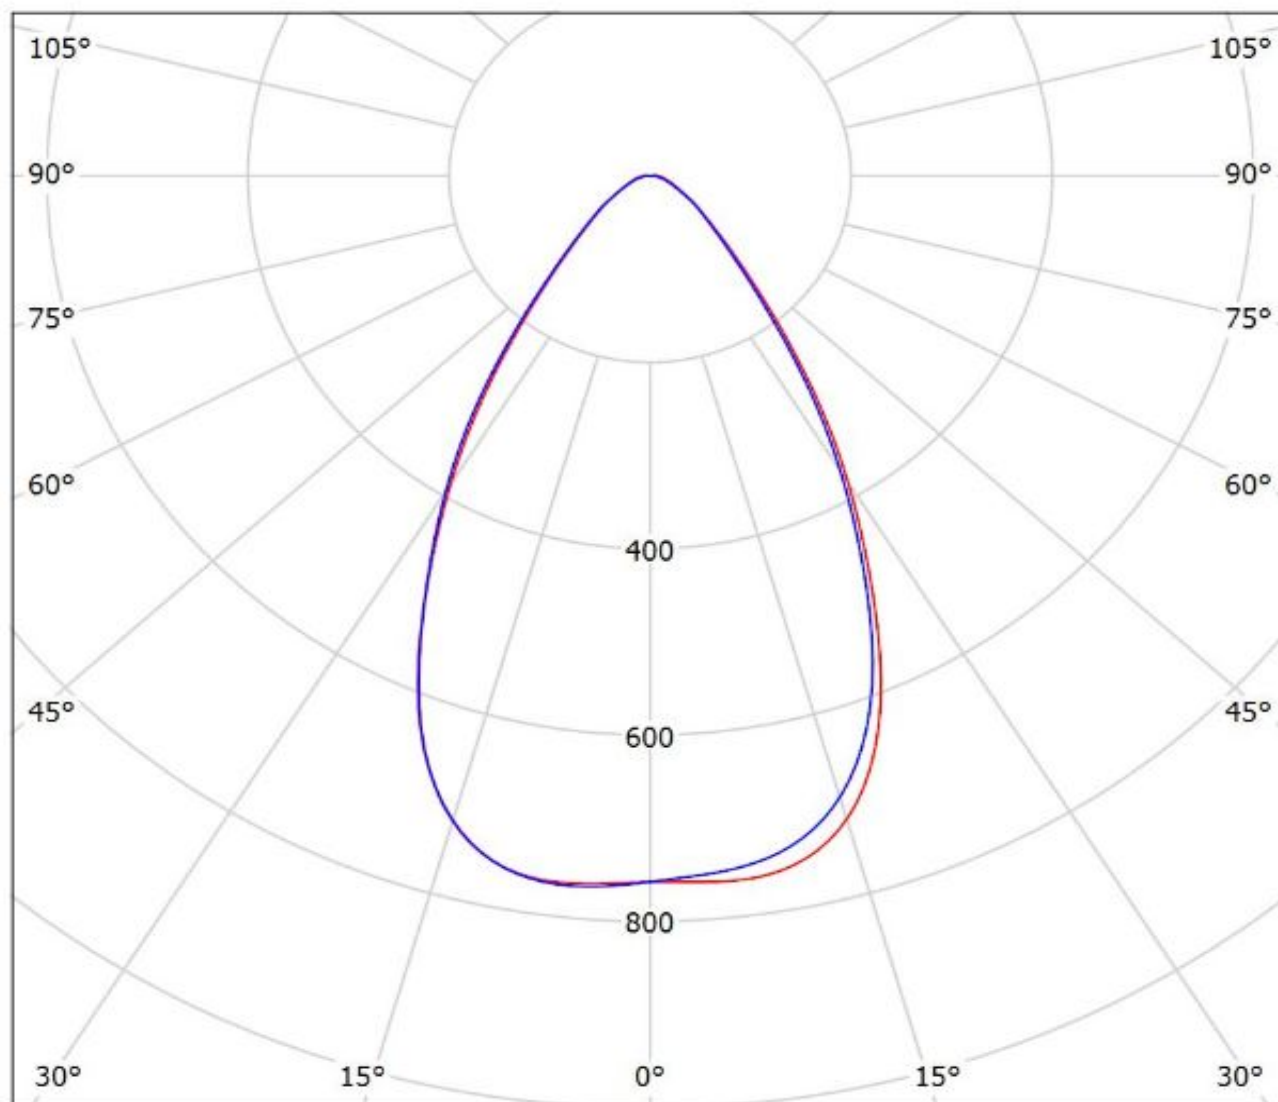


cd/klm

— C0 - C180 — C90 - C270

η = 95%

Luminaire: Ledil Oy CS14130_HB-IP-2X6-W_(H35C1)_SIMULATED

Lamps: 1 x LG H35C1

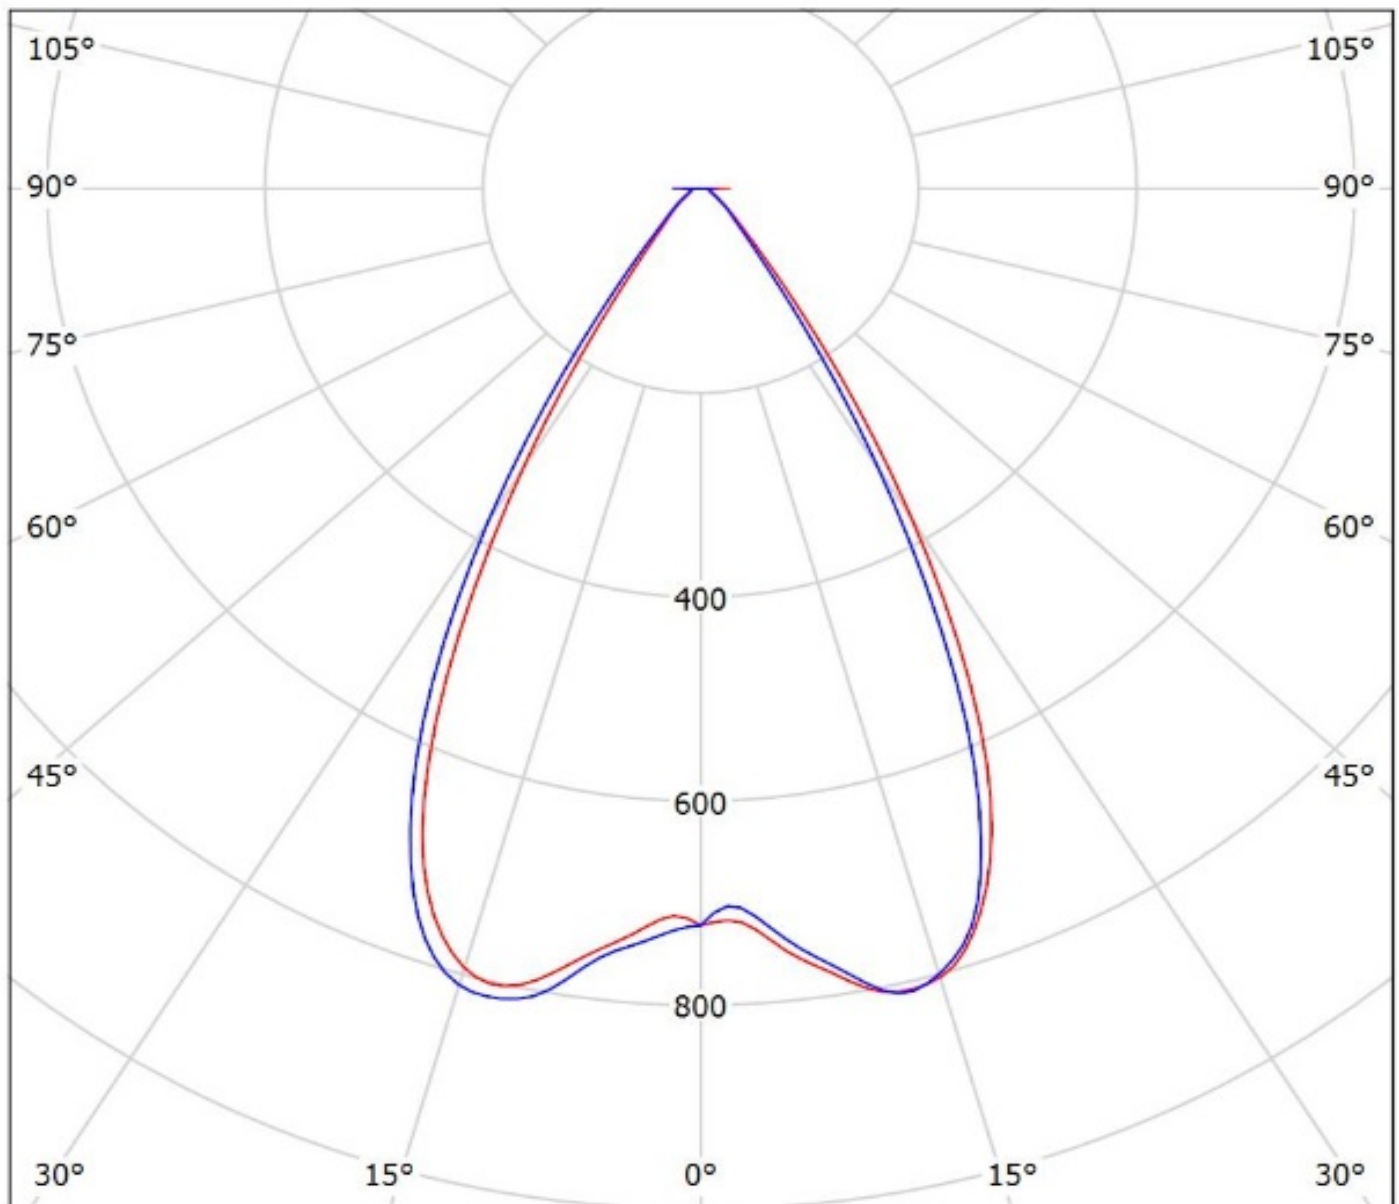


cd/klm

— C0 - C180 — C90 - C270

$\eta = 95\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(LUXEON_T) Eff.94.0%

Lamps: 1 x LUXEON_T_6x2_(LXH8-FW30)_1062.6lm@250mA_P=8.46572W_I=249.8mA

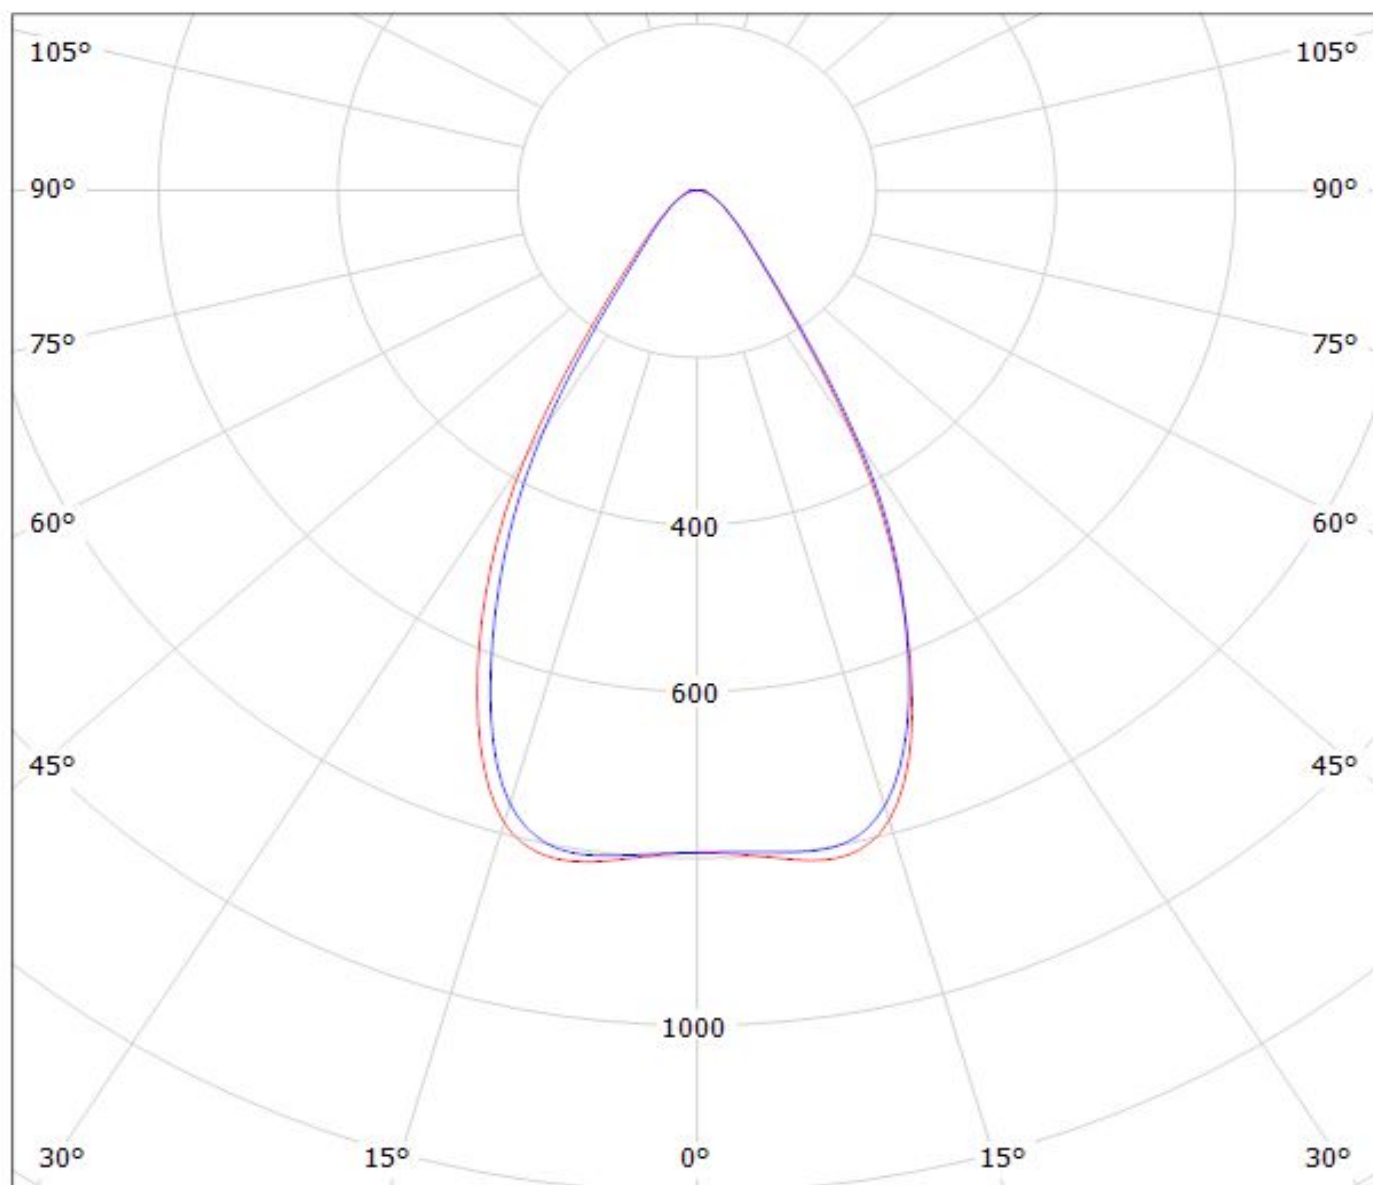


cd/klm

— C0 - C180

— C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(REBEL-ES) Eff.94.0%
Lamps: 1 x Luxeon_Rebel-ES_2x6_864.2lm@250mA_P=9.03127W_I=249.8mA

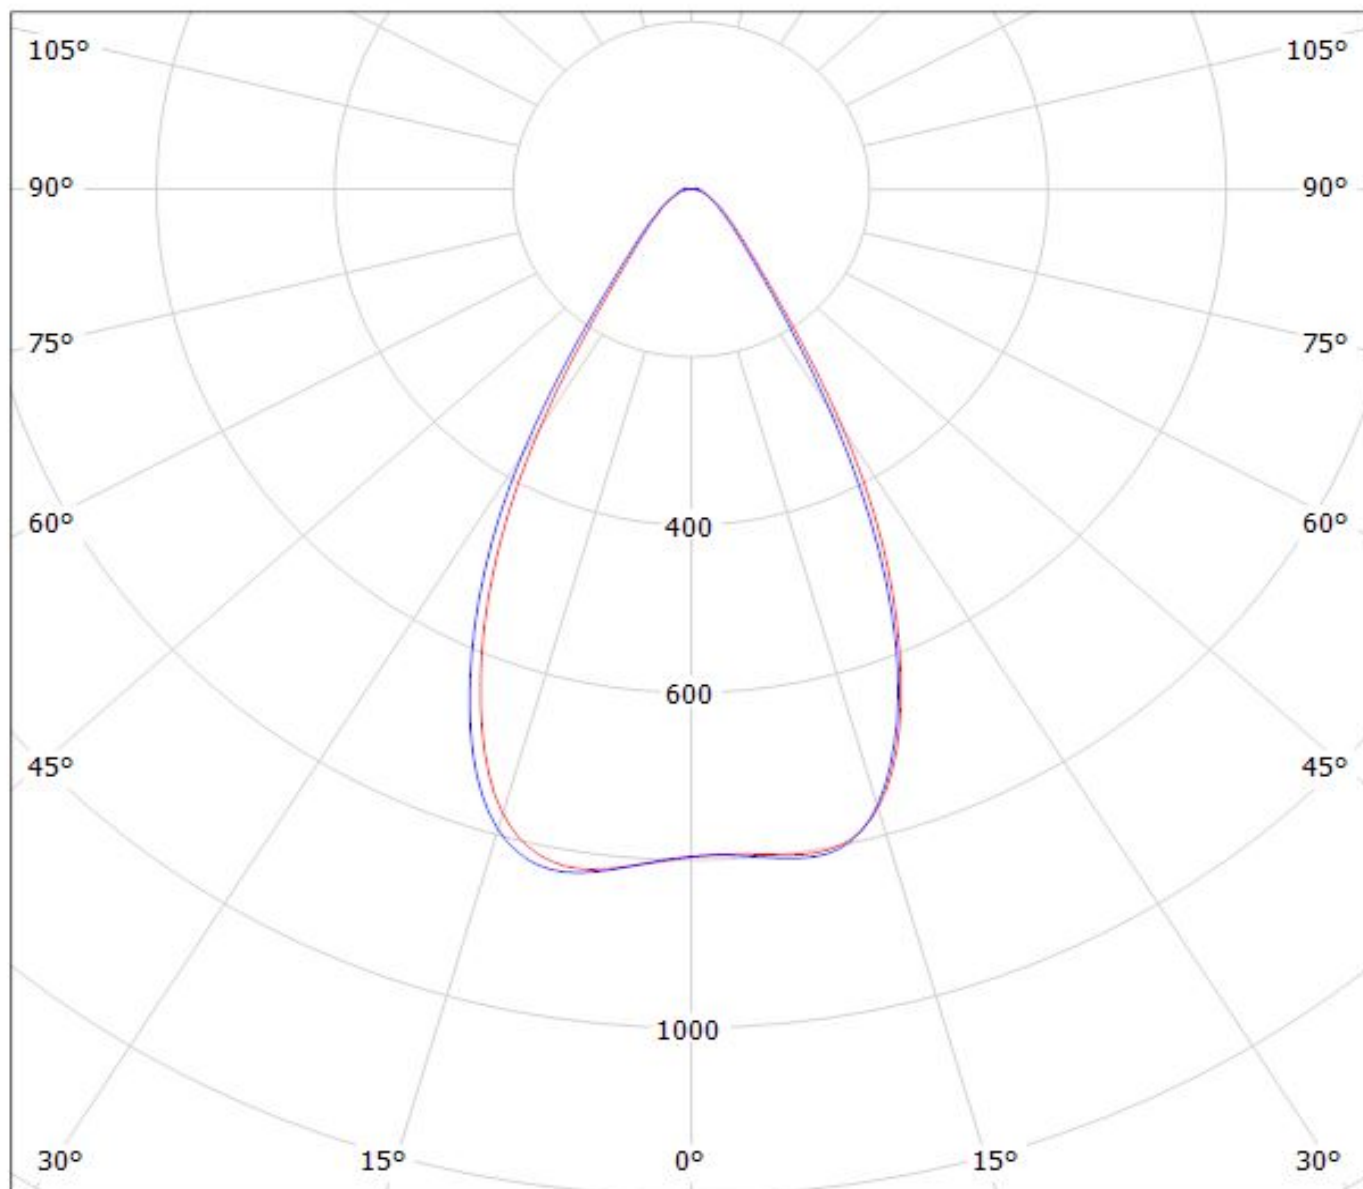


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(LUXEON-R) Eff.94.0%
Lamps: 1 x Luxeon_R_6x2_1154lm@250mA_P=8.29161W_I=249.8mA

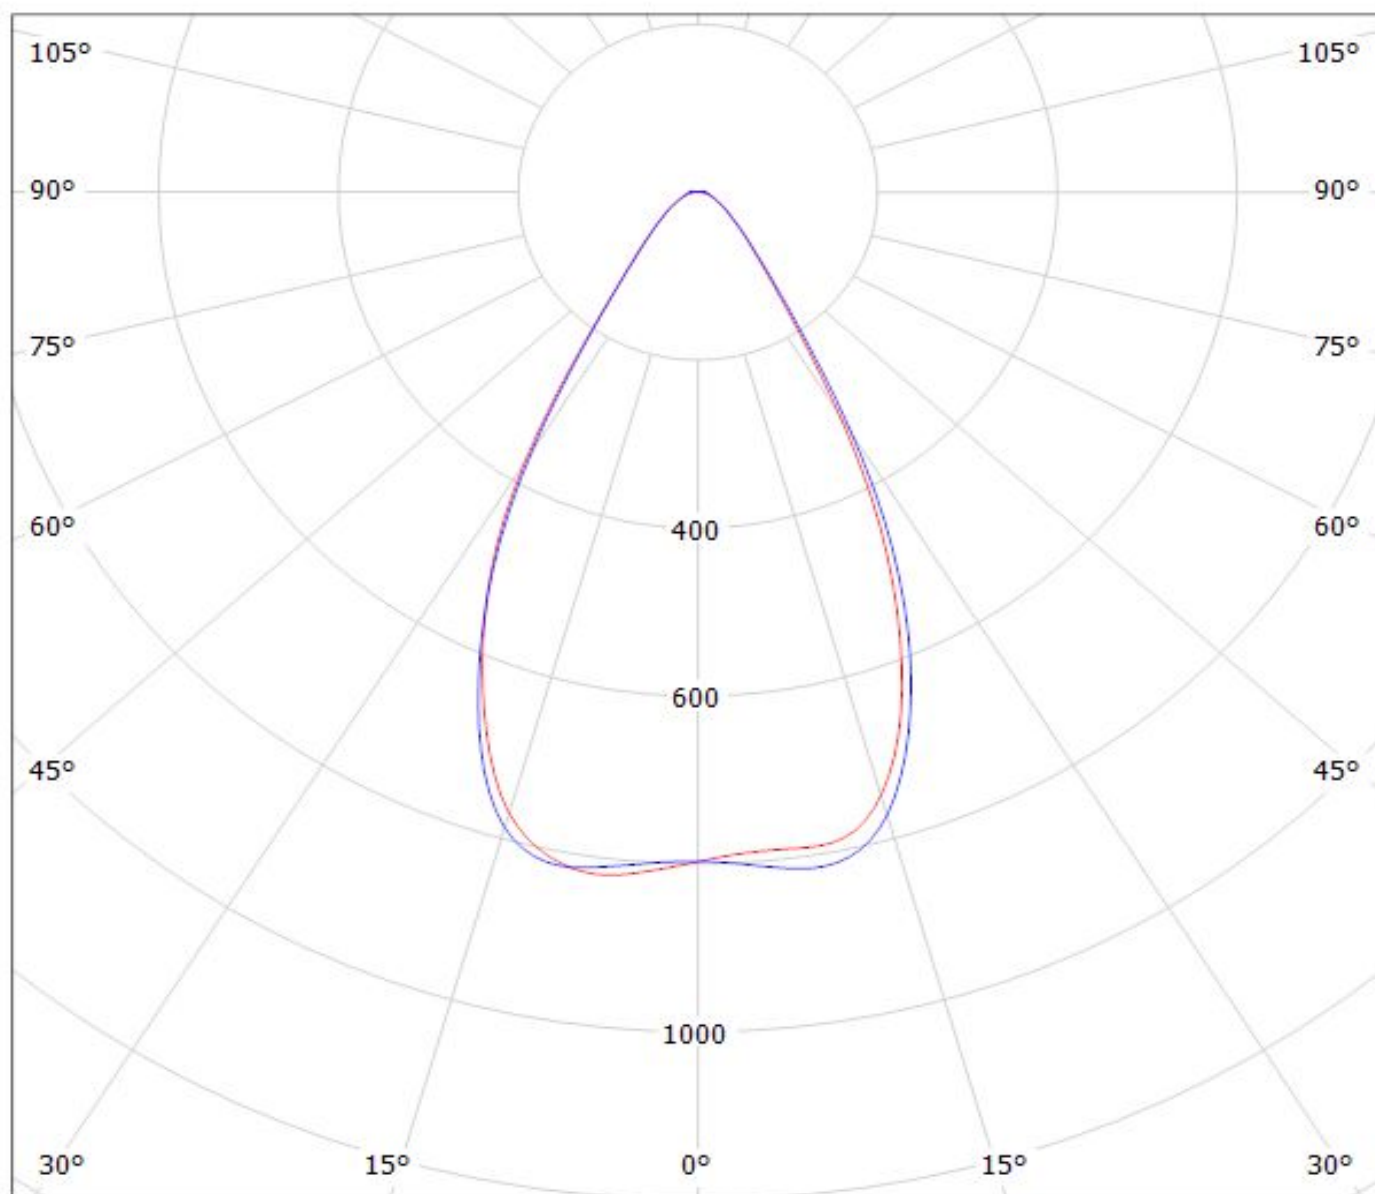


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(LUXEON_Z_ES) Eff.94.0%
Lamps: 1 x LUXEON_Z_ES_990.2lm@250mA_P=8.31159W_I=249.8mA

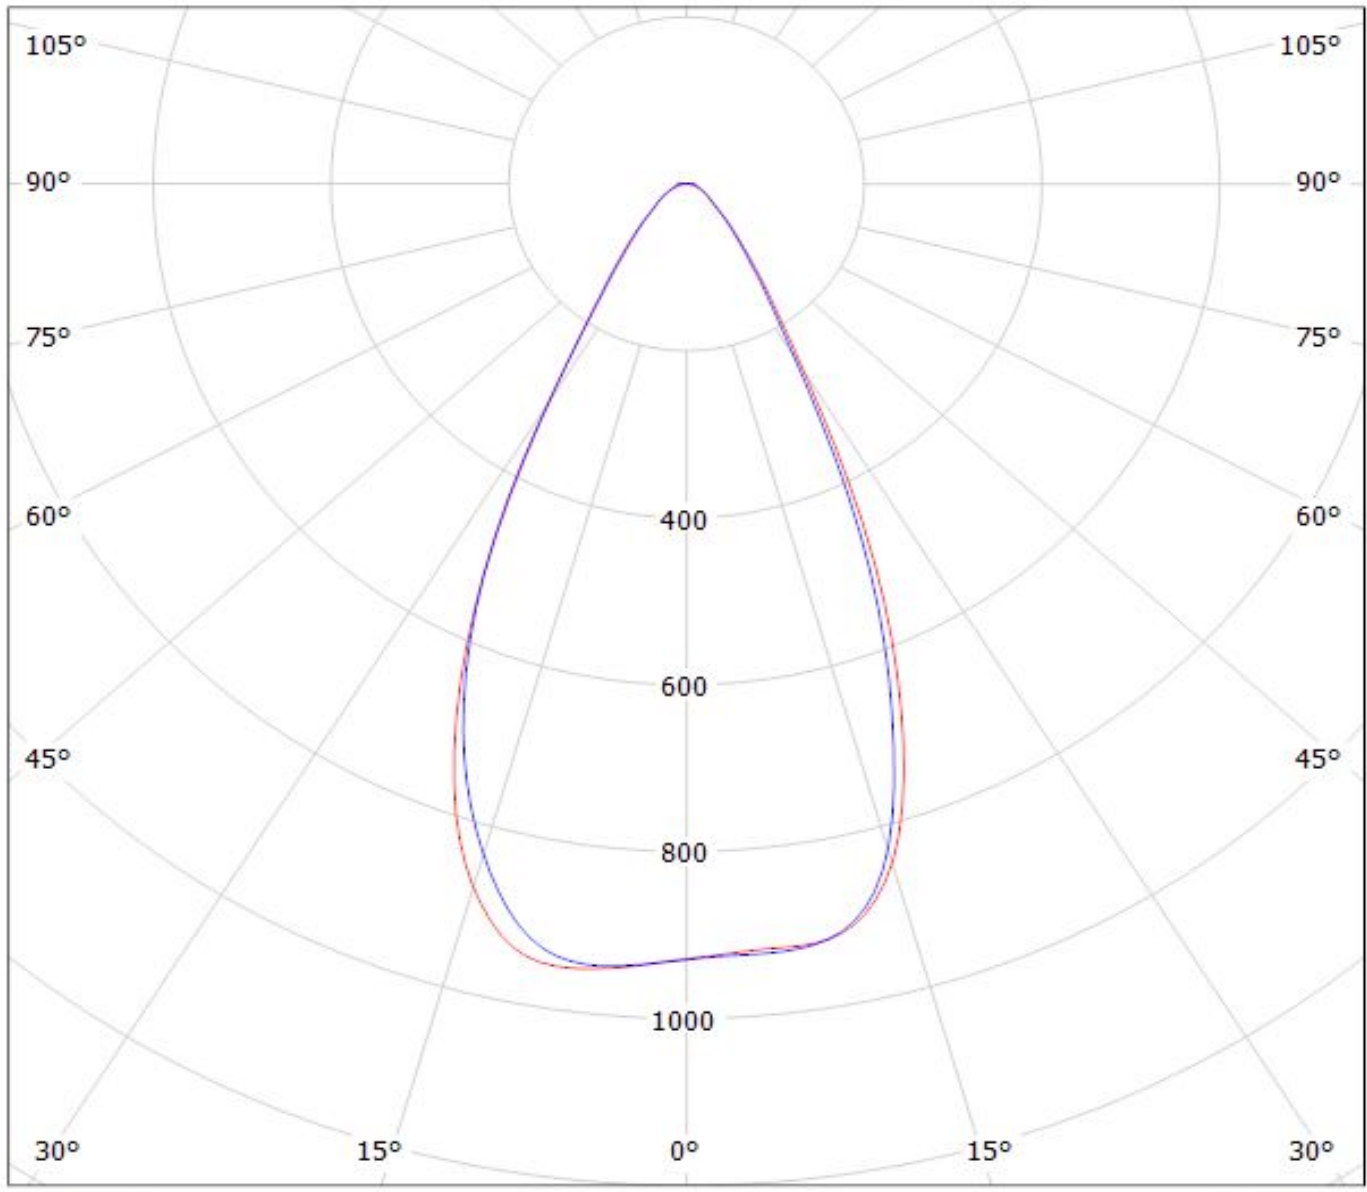


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(Luxeon_TX)
Lamps: 1 x Luxeon_TX_2x6_1301.4lm@250mA_P=8.26138W_I=249.8mA

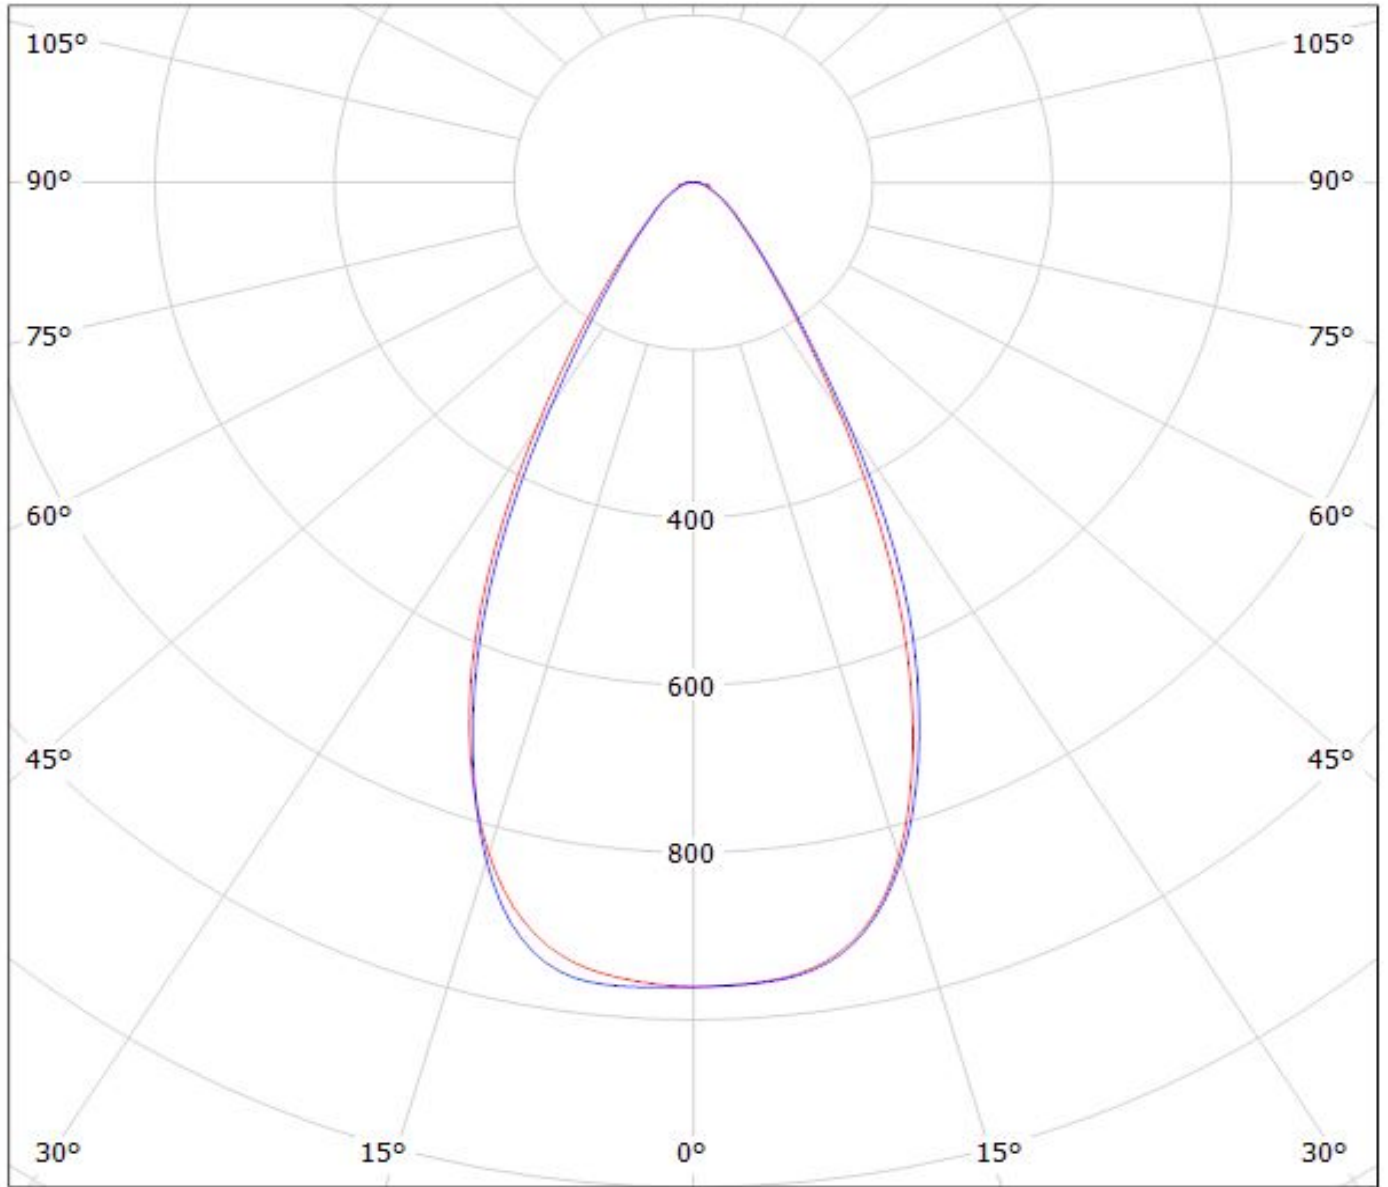


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: Ledil CS14130_HB-IP-2X6-W_(XR-TX)

Lamps: 1 x Luxeon_XR-TX_1376.41lm@250mA_P=8.3920W_I=0.250A

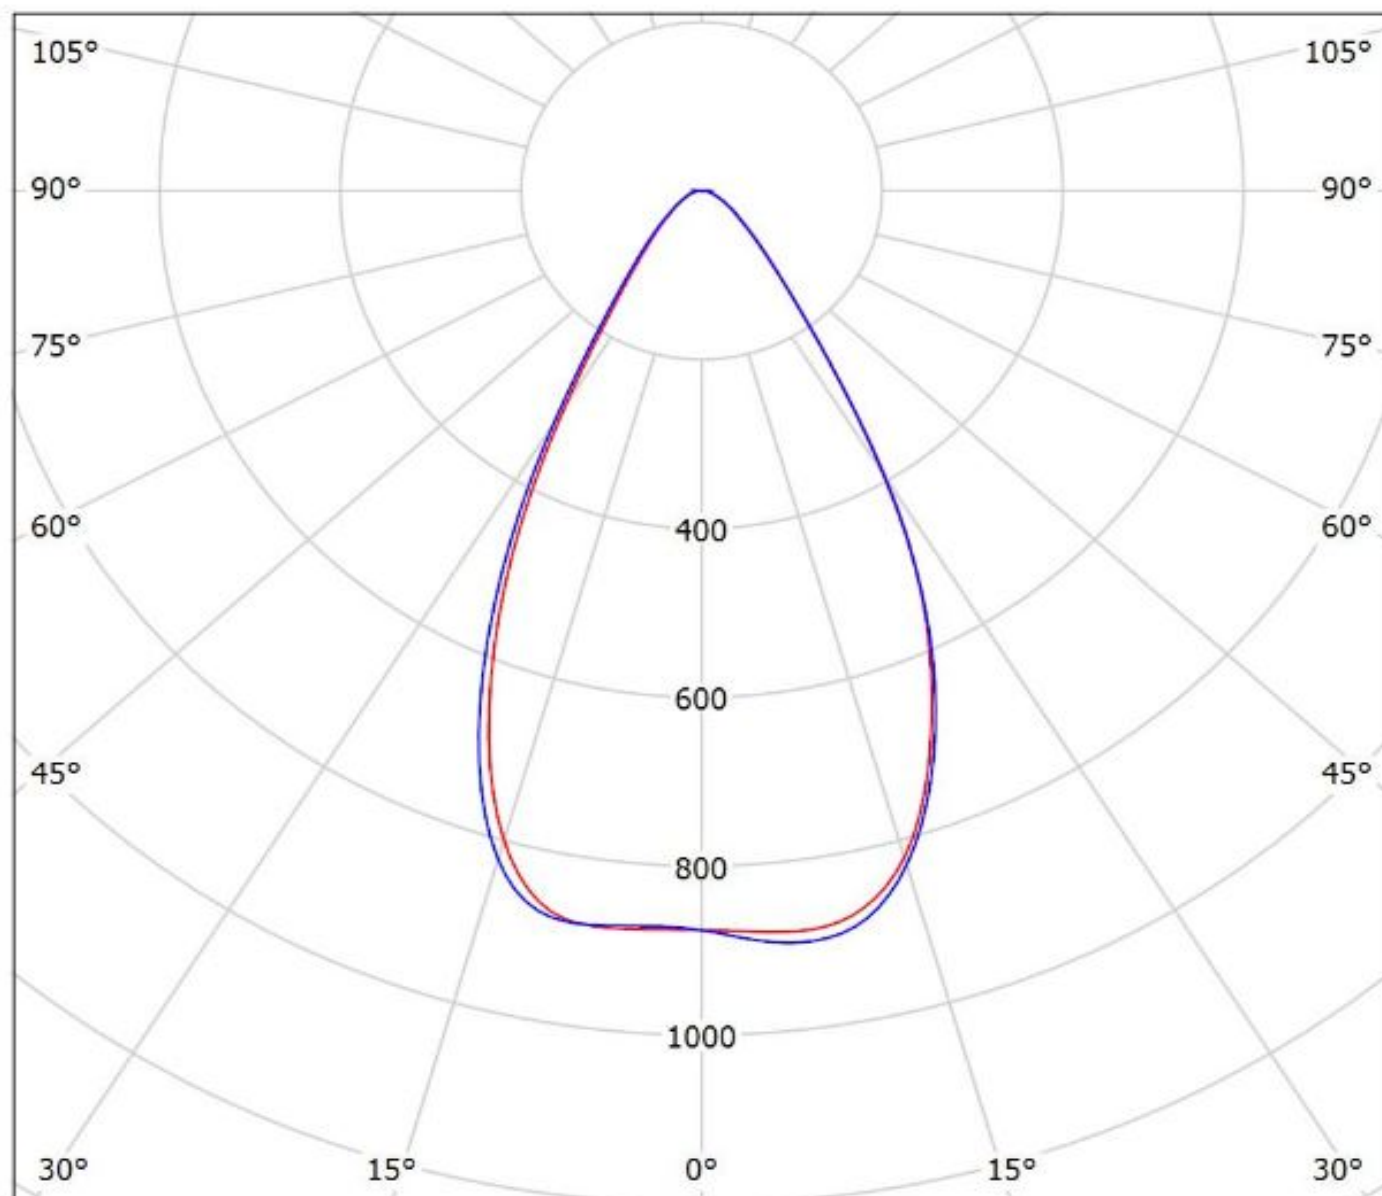

cd/klm


— C0 - C180

— C90 - C270

$\eta = 95\%$


Luminaire: Ledil CS14130_HB-IP-2X6-W_(NVSL219CT)

Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

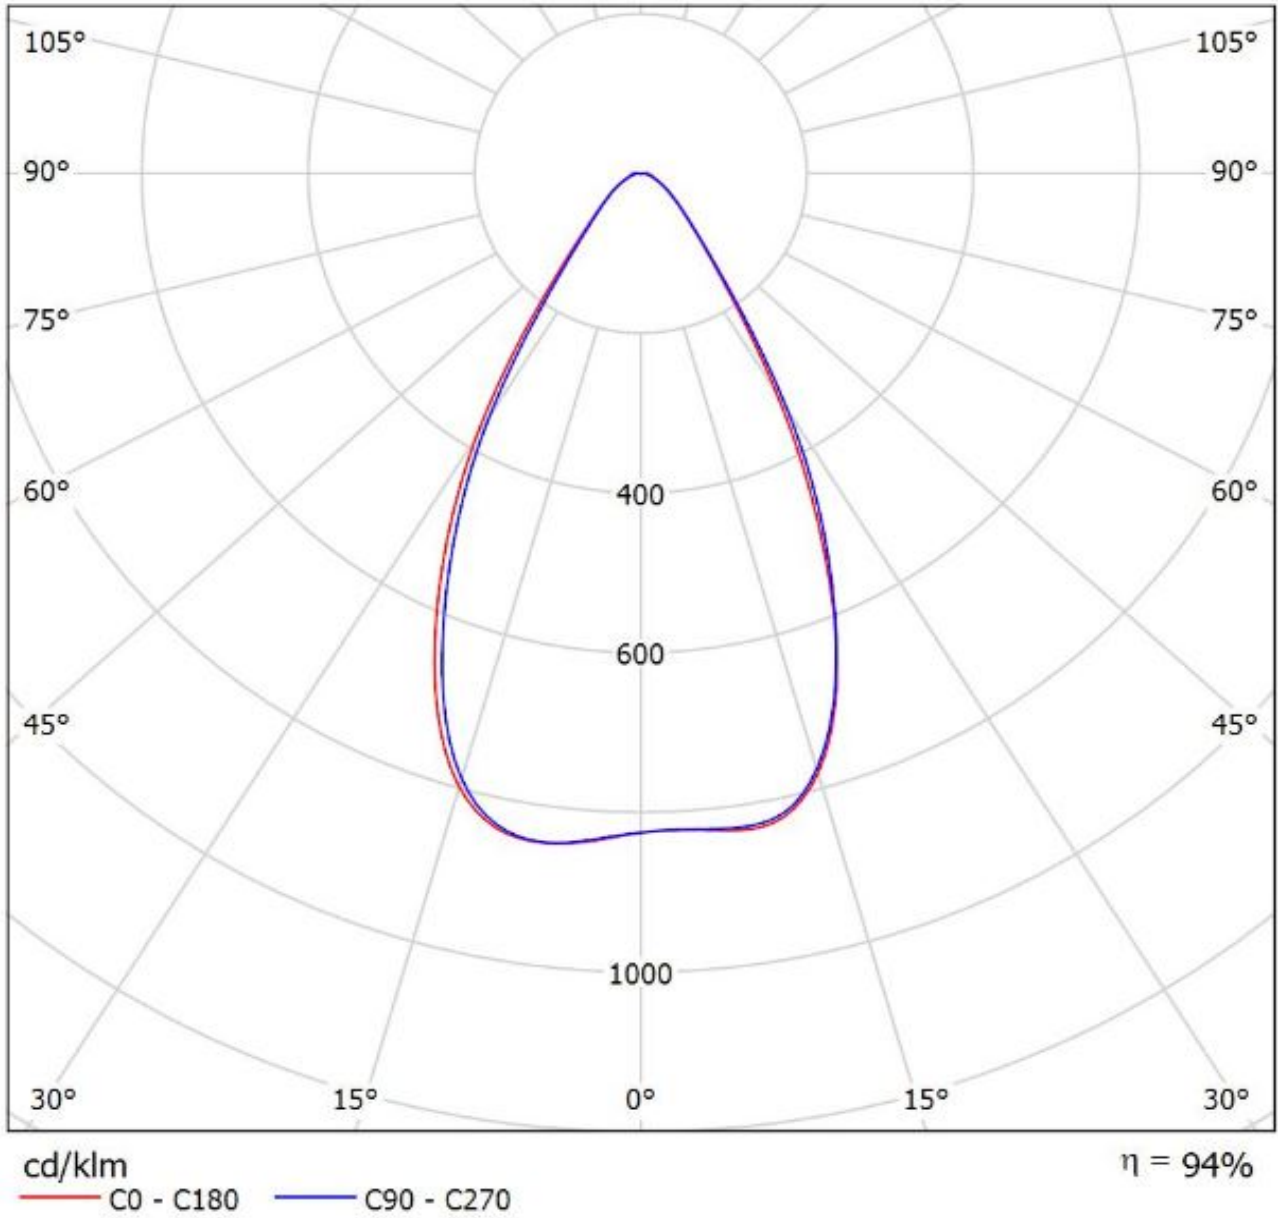

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(Nichia_E21)

Lamps: 1 x Nichia_NVSW21A_583.232lm@600mA_P=3.51742W_I=0.600A

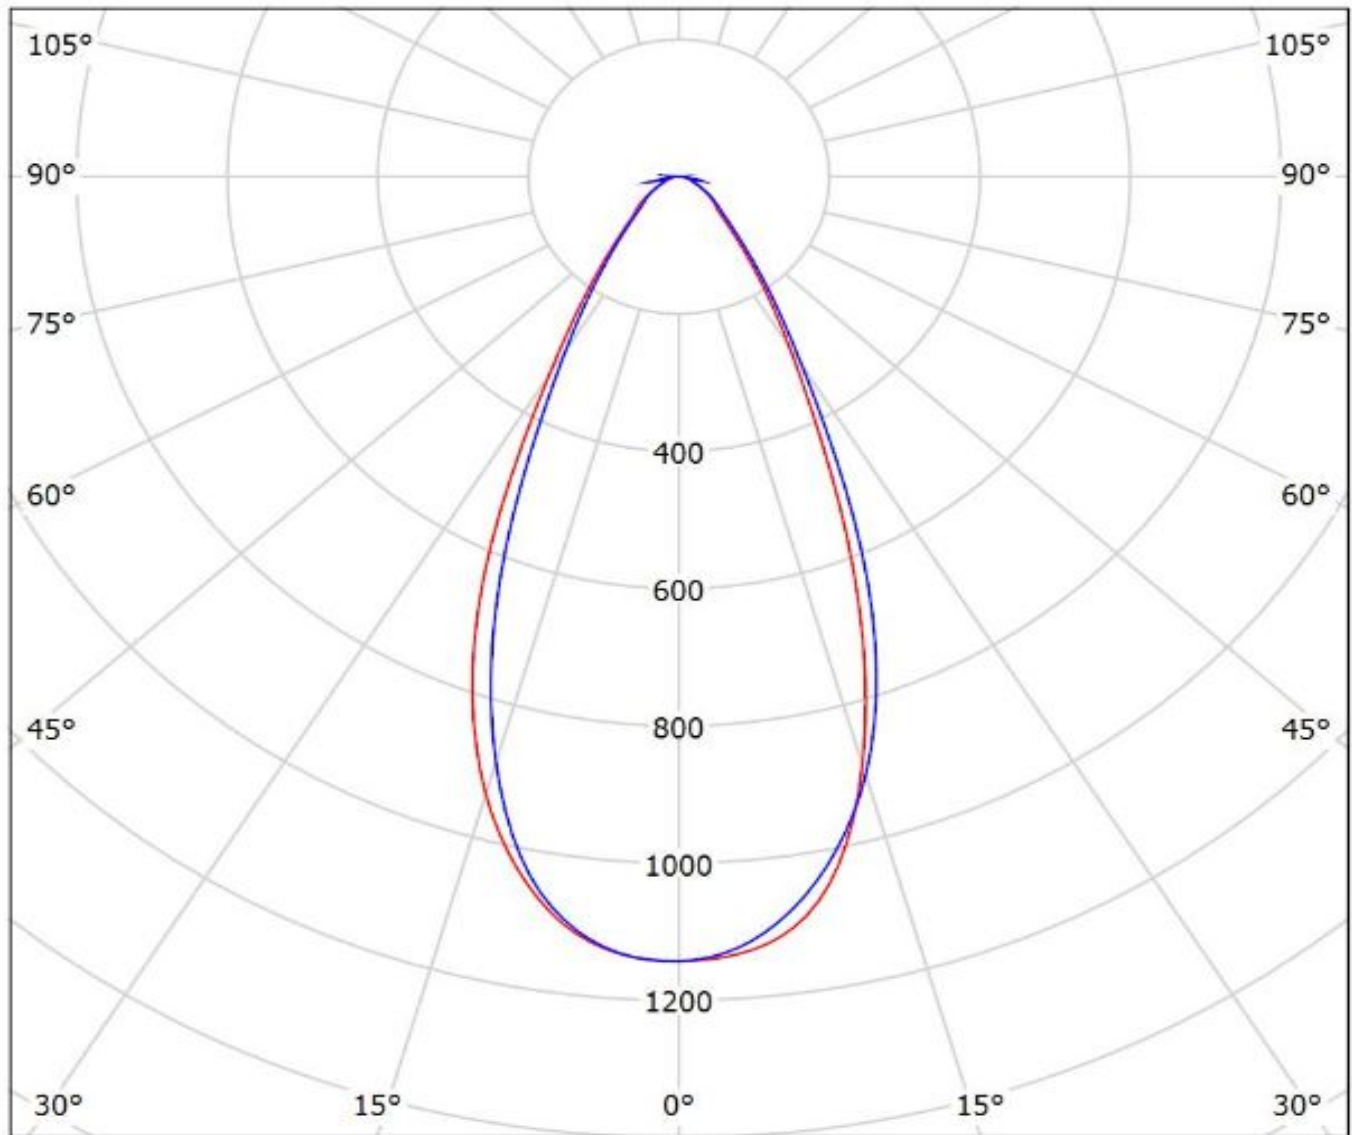


cd/klm

— C0 - C180 — C90 - C270


$\eta = 96\%$

Luminaire: Ledil Oy CS14130_HB-IP-2X6-W-DURIS-S8_SIMULATED
Lamps: 1 x DURIS-S8

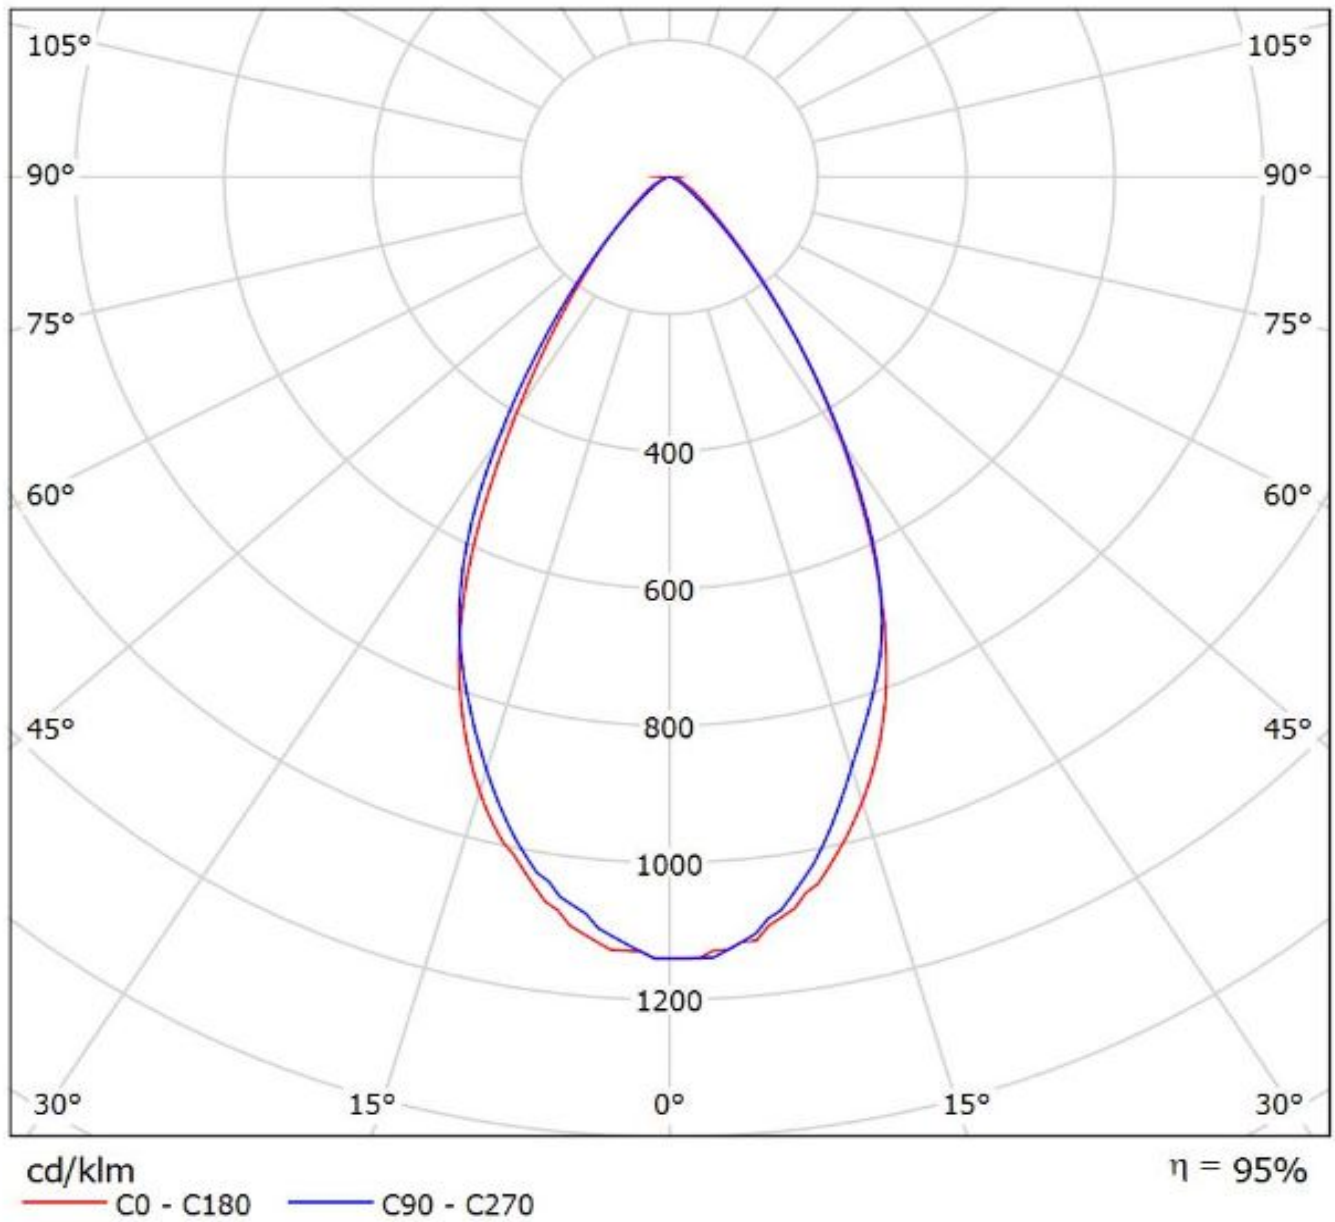

Luminaire: LEDiL Oy CS14130_HB-IP-2X6-W_(Z5M1) Eff.94.0%

Lamps: 1 x SEOUL_Z5M1_2x6_(SZ5-M1-WW-C8)_1177.2lm@250mA_P=8.5619W_I=249.8mA

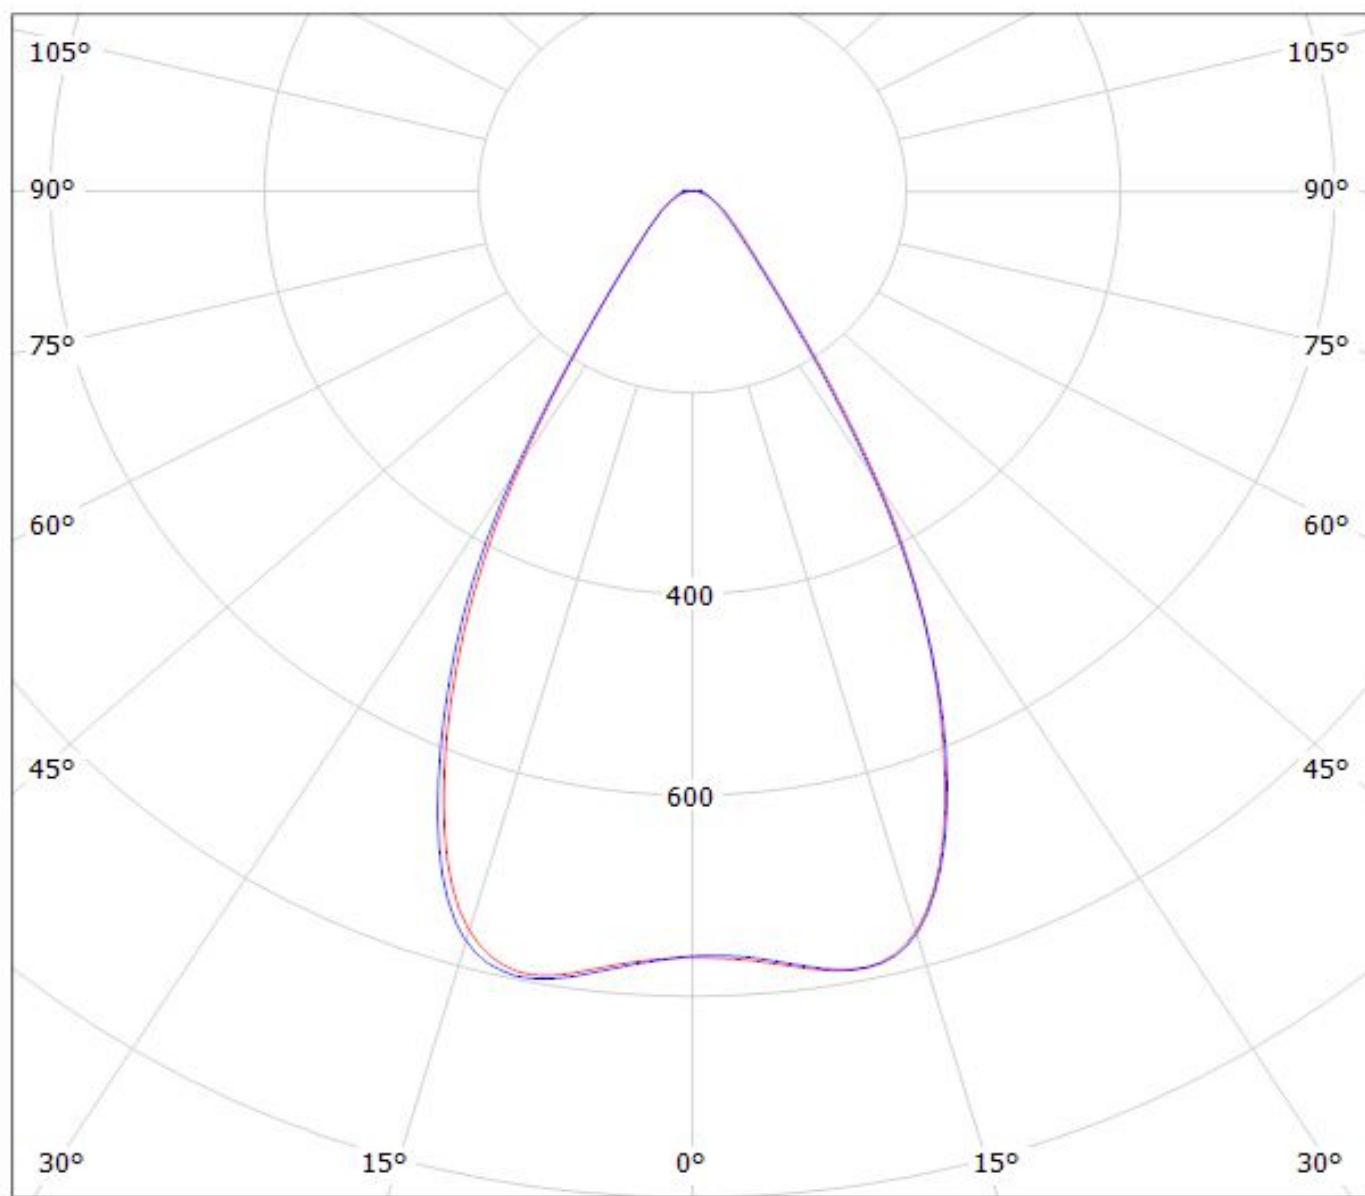

cd/klm


— C0 - C180

— C90 - C270

$\eta = 94\%$

Luminaire: Ledil Oy CS14130_HB-IP-2X6-W_MJT4040_SIMULATED

Lamps: 1 x

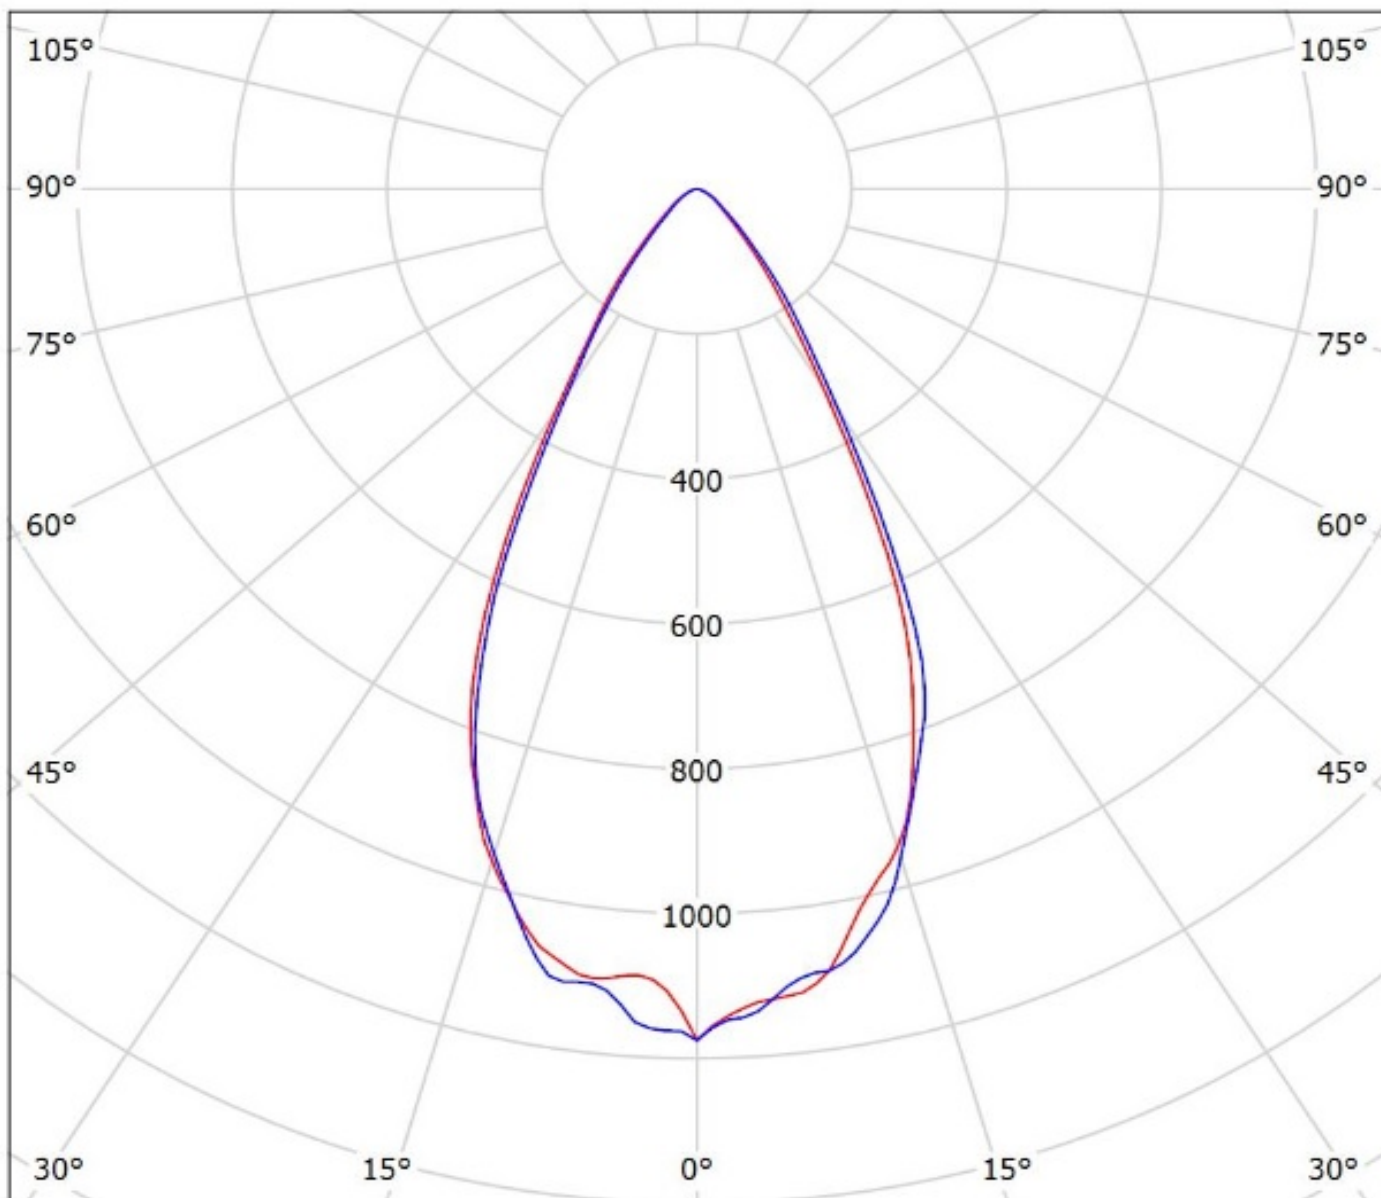


cd/klm

— C0 - C180 — C90 - C270

$\eta = 93\%$


Ledil Oy CS14130HB-IP-2X6-W / LDC (Polar)

Luminaire: Ledil Oy CS14130HB-IP-2X6-W
Lamps: 1 x SEOUL_Z5M

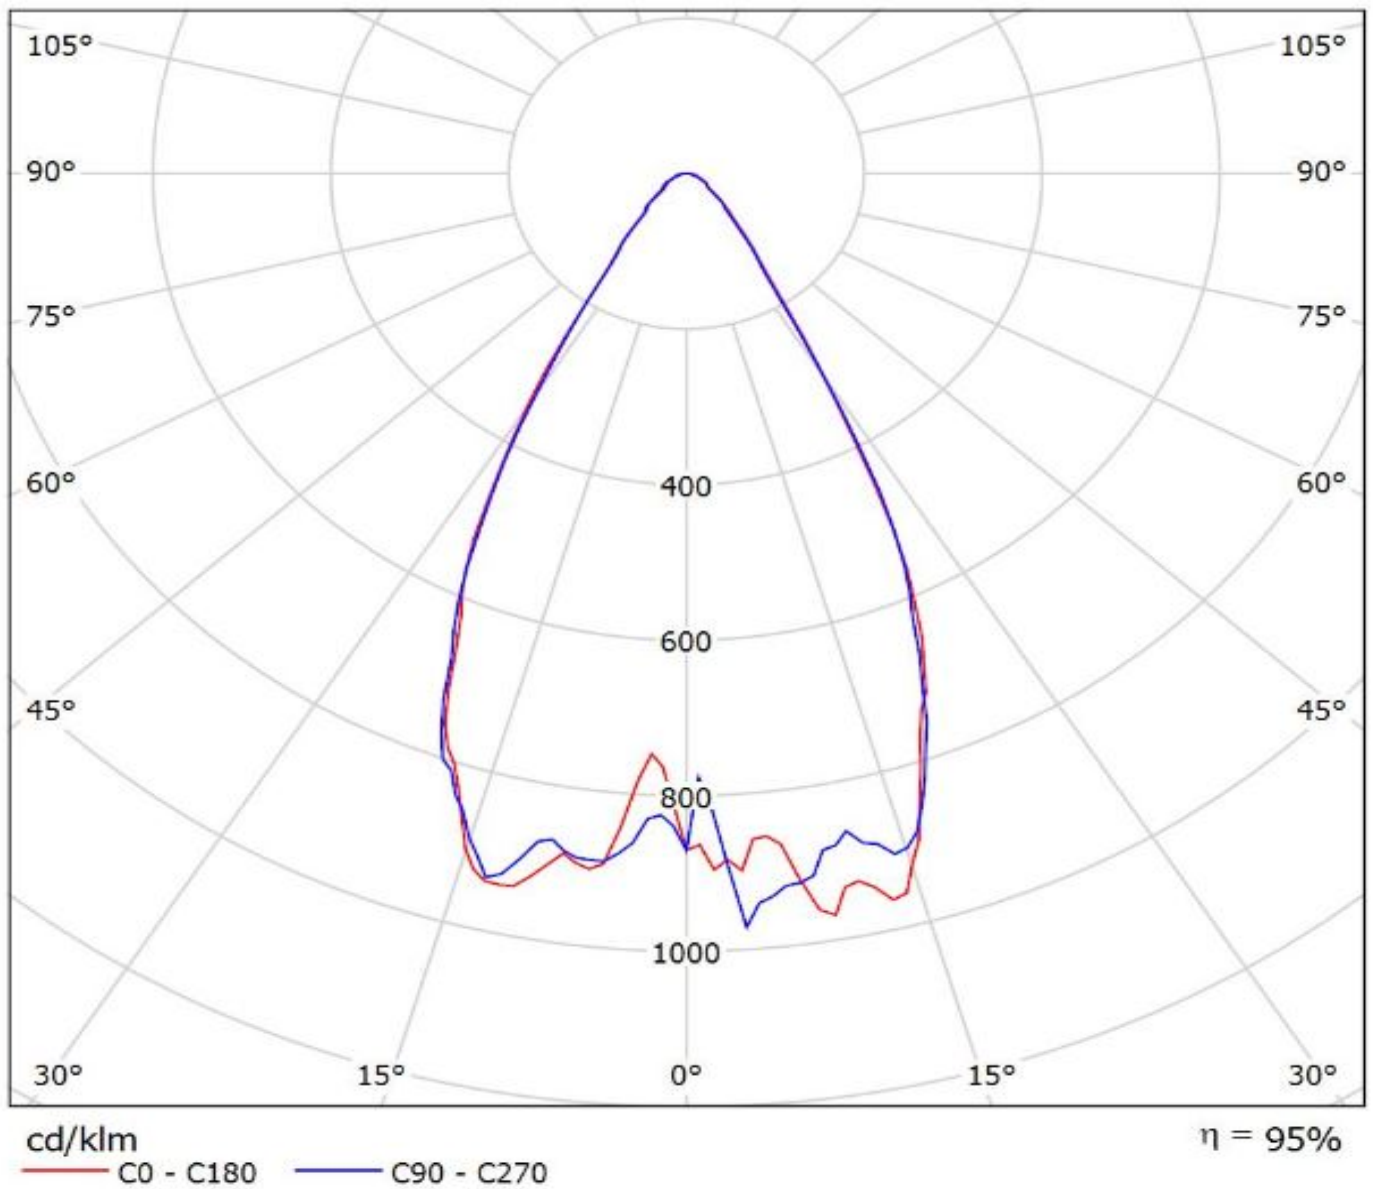

Luminaire: Ledil CS14130_HB-IP-2X6-W_(Z8Y22_PLUS)

Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

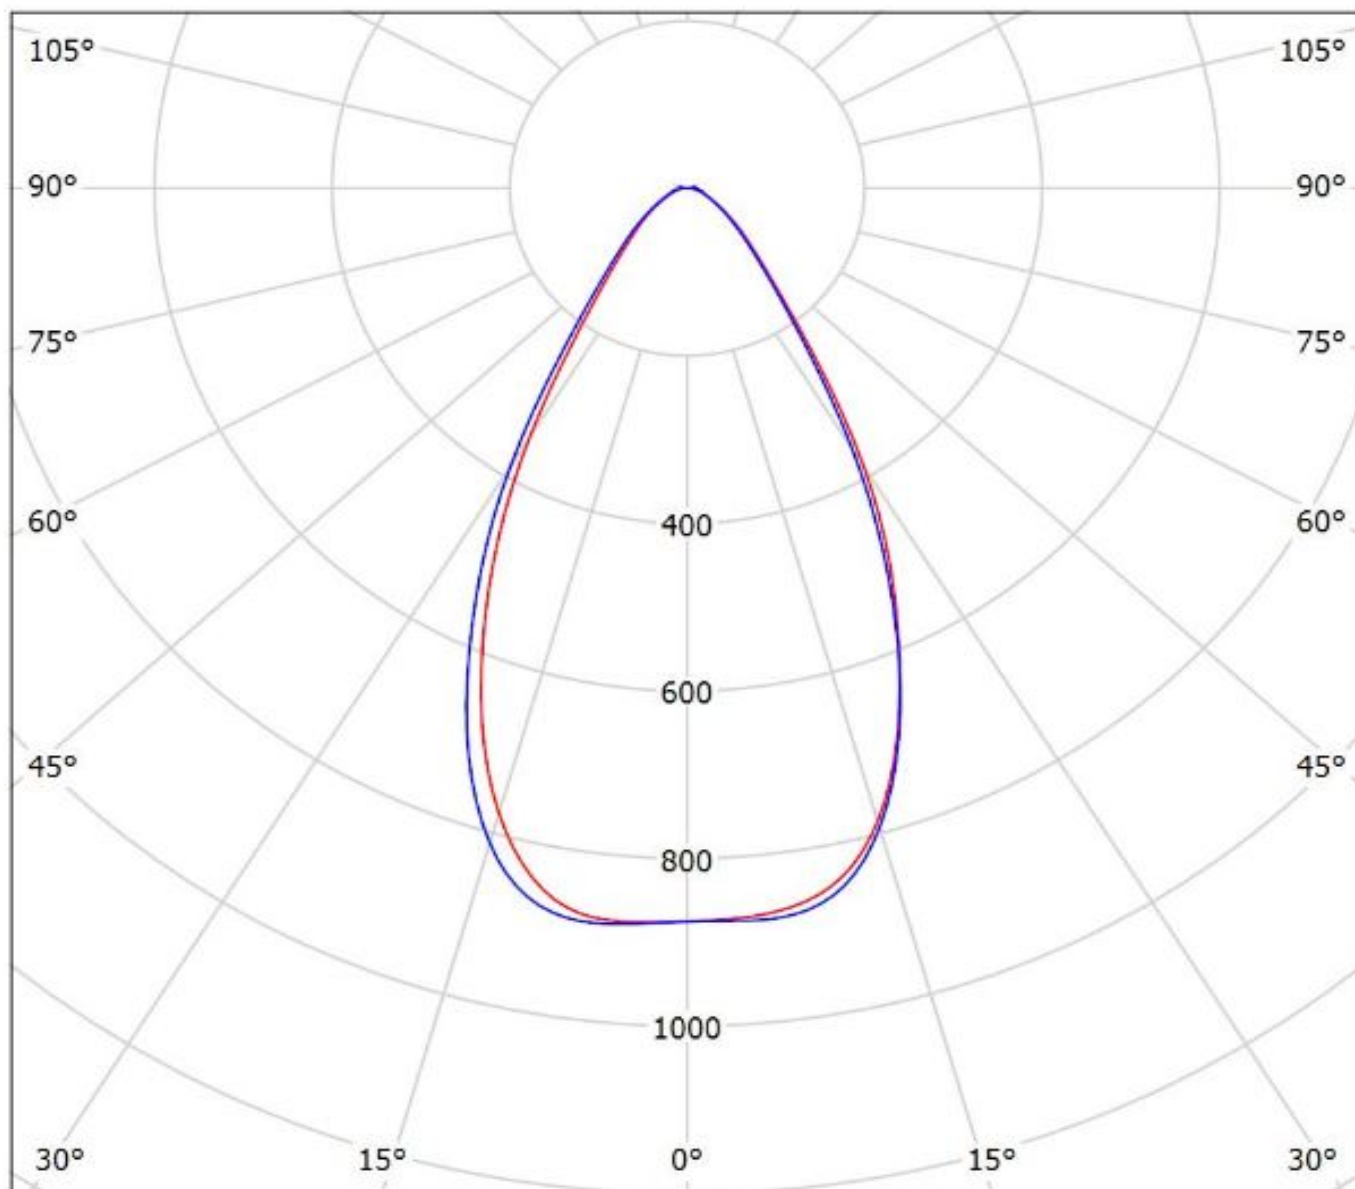

cd/klm


— C0 - C180 — C90 - C270

$\eta = 95\%$

Ledil CS14130_HB-IP-2X6-W_(TL1L4) / LDC (Polar)

Luminaire: Ledil CS14130_HB-IP-2X6-W_(TL1L4)

Lamps: 1 x Toshiba_TL1L4_2x6_(TL1L4-DW0)_1263.19lm@250mA_CCT=6500K_P=8.5W_I=0.25A

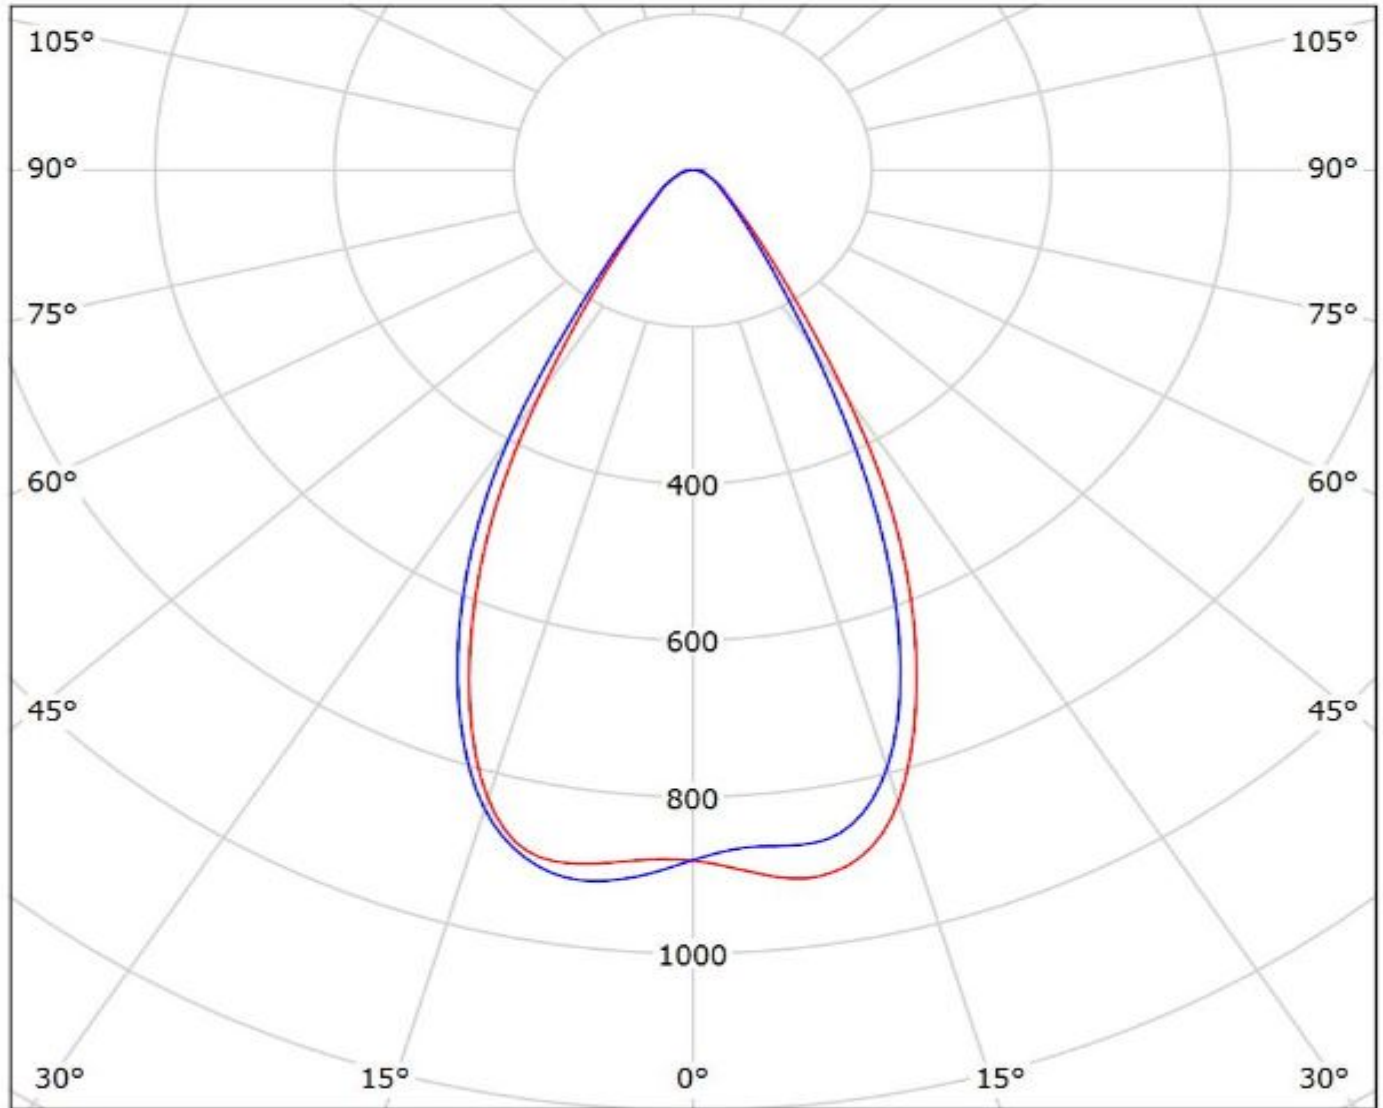

cd/klm

— C0 - C180

— C90 - C270

$\eta = 95\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.