



MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass

SPECIFICATION


Current Rate : 3 AMP
 Insulation Resistance : 5000ΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

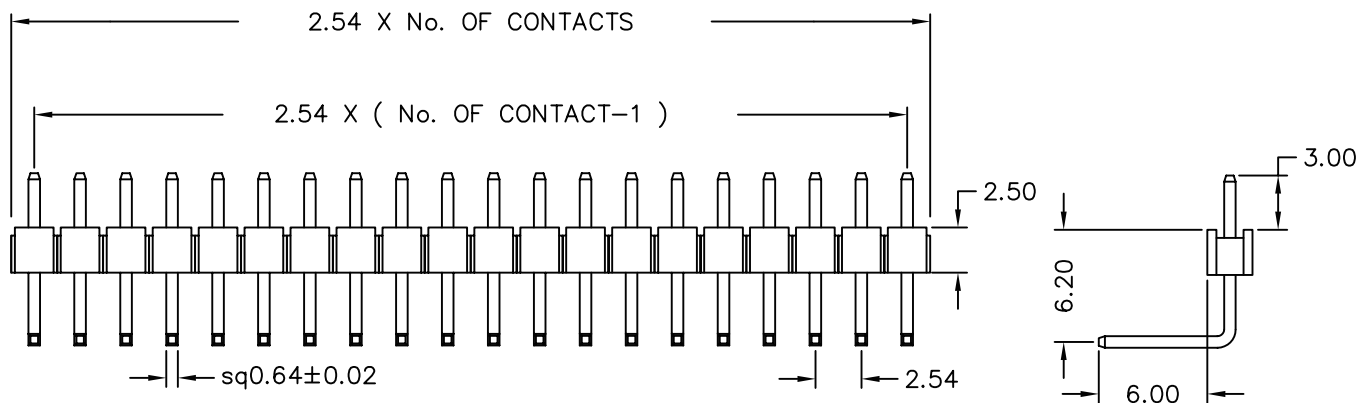

RoHS Compliant

TOLERANCES ARE

- X.±
- .X±
- .XX±
- .XXX±
- ANG±



Recommended P.C.B Layout

DESCRIPTION: PIN HEADER 2.54*2.54mm
 RIGHT ANGLE TYPE, SINGLE ROW OPPOSITE INSULATOR