

Data sheet

Commercial Art.No.: 81.000.6170.0

Switched-mode power supply WIPOS P3 24-10

wipos switched-mode power supply, nominal voltage: 24 V DC / 10A (setting range 22,5-28,5 V DC), sustained short-circuit protection, input voltage range: 340-575 V AC, 480-820 V DC, 3 phase, W x H x D: 89 × 123,6 × 118,2 mm



| | |
|--------------------|---------------|
| Commercial Art.No. | 81.000.6170.0 |
| EAN | 4049088058233 |
| Order Unit | 1 |

Certificates / Approvals



Technical data

General

| | |
|--------------------------------------|----------------------|
| Connection type | screw connection |
| Number of phases | 3 phase power supply |
| Modular version | No |
| Mounting type, other | No |
| Mounting type, wall mounting | No |
| Rail mounting possible | yes |
| Housing material | Metal |
| Operating temperature min. | -40 °C |
| Operating temperature max. | 71 °C |
| relative humidity min. | 20 % |
| relative humidity max. | 95 % |
| Storage temperature / transport min. | 85 °C |
| Storage temperature / transport max. | -40 °C |
| Degree of protection (IP) | IP20 |
| Pollution degree | 2 |
| Parallel-service possible | yes |
| Number of parallel switchable device | 2 |

Technical data

| | |
|---------------------------------|---|
| Function display | "DC OK" (LED green) (U(o) 17.6...19.4V) |
| function display "DC Low" | "DC Low" (LED red) |
| Short-circuit protective device | Strombegrenzung (fold forward) |
| ripple and noise | < 0.1 V |

| | |
|----------------------------------|--|
| isolating voltage Output DC | 4242 V |
| cohesive resistance (In-/Output) | 100 MOhm |
| Derating | 61°C...71°C: 2,5 %/K |
| cooling | free convection |
| MTBF | 488.000h |
| Connector cross section (input) | min. 0,5mm ² (AWG24) max. 6mm ² (AWG10) |
| Connector cross section (output) | min. 0,5mm ² (AWG24) max. 6mm ² (AWG10) |
| Wire strip length | 8 mm |
| Permissible torque max. | 0.6 Nm |
| Control "Single / Parallel" | Operating mode: single operation / parallel operation |
| CE-Norm | EN61000-6-3, EN 55022 Class B, EN61000-3-2, EN61000-3-3, EN61000-6-2, EN55024, EN61000-4-2, Level 4, EN61000-4-3 Level 3, EN61000-4-4 Level 4, EN61000-4-5 L-N Level 3, L/N-FG Level 4, EN61000-4-6 Level 3, EN61000-4-8 Level 4, EN61000-4-11, ENV 50204 Level 2, EN61204-3 |
| TÜV/safety | EN60950-1, EN61558-1, EN61558-2-16(erfüllt EN60204) , IRAM |
| Approval cULus | UL 508 Listed, UL60950-1 Recognized |
| Number of + | 2 |
| Number of - | 2 |
| Further terminals | L1, L2, L3, N, PE, OK (2x Relay-NO) |

Output

| | |
|---------------------------|--------|
| Type of output voltage | DC |
| Power output | 240 W |
| Output voltage stabilized | yes |
| Output voltage | 24 V |
| Min. output voltage | 22.5 V |
| Max. output voltage | 28.5 V |
| Output current | 10 A |

Input

| | |
|---------------------------------|---------------------------------------|
| Type of voltage (input voltage) | |
| Power consumption | < 266 VA |
| Input voltage DC min. | 480 V |
| Input voltage DC max. | 820 V |
| Input voltage AC min. | 340 V |
| Input voltage AC max. | 575 V |
| Rated frequency min. | 47 Hz |
| Rated frequency max. | 63 Hz |
| Max. starting current | 20 A |
| Input fuse | 3x T2,0A / 600V AC (intern) |
| input protection | Varistor (voltage-sensitive resistor) |

Dimensions

| | |
|------------------------------|--------|
| Depth | 119 mm |
| Width | 90 mm |
| Height | 124 mm |
| Mounting Distance horizontal | 25 mm |
| Mounting Distance vertical | 25 mm |
| Weight | 1.1 kg |

Classification



| | |
|-----------|--|
| ECLASS 11 | |
|-----------|--|

| | |
|------------|----------|
| ECLASS 8.1 | 27049002 |
| ETIM 7.0 | EC002540 |
| ETIM 6.0 | EC002540 |
| ETIM 5.0 | EC002540 |

Product compliance

| | |
|------------------------------|-----------|
| ROHS conformity status | Compliant |
| REACH-SVHC conformity status | Compliant |

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Die Reproduktion, Distribution und Utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

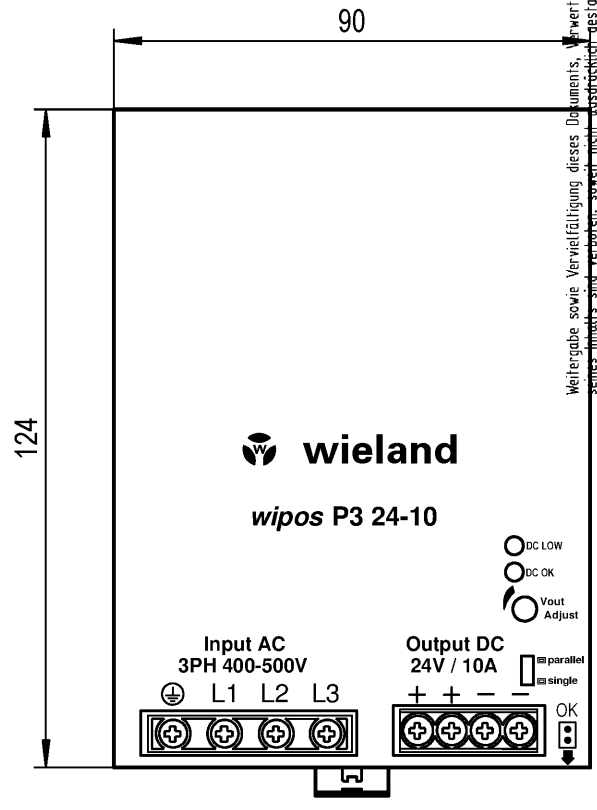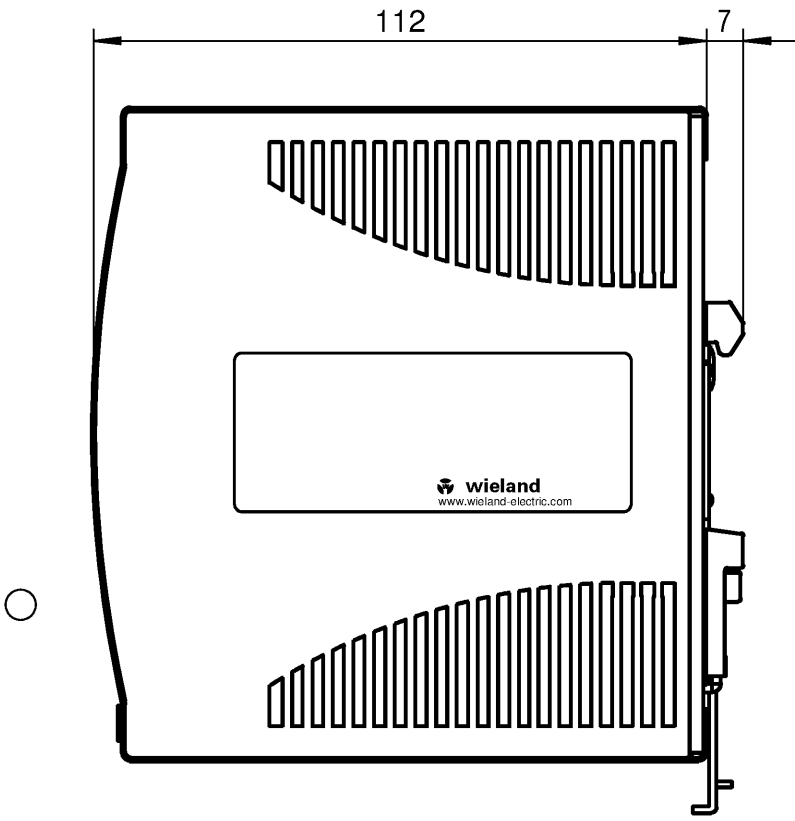

Qu - PEE 12/92

Weitere Angaben siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.

www.wieland-electric.com
eshop.wieland-electric.com

ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

| | | | | | | | | | |
|--|--|---|--|---|------------------------------|---|------------------|----------------------------|--|
| Freitoleranz nach General tolerance | | CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed | | | 1. Verwendung: First Use: | | Blatt: Sheet: | | |
| | | Werkstoff/ Material | | 2014 | Tag/ Date | Name | | Zeichnung Nr./ Drawing No. | |
| | | | | gezeichnet drawn | 23.10. | | | | |
| Maßstab/Scale | | | | geprüft checked | | | | 81.000.6170.0 01K | |
| | | | | Normgepr. Stand. check | | | | | |
| | | Datei/ File: 030091__01K.DCD | | Ersatz für/ Replacement for: | | | | | |
| | | www.wieland-electric.com | | Type | Benennung/ Title | | | | |
| Index | | | | Datum/ Blatt Date/ Sheet | | Teilespezifikation / Component specification | | | |
| Änderung/ Revision | | | | Schaltnetzteil / Switching power supply wipos P3 24 VDC / 10 A | | | | | |

A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
M1
M2
M3
L
G
i
11.1
12.1
1.1