



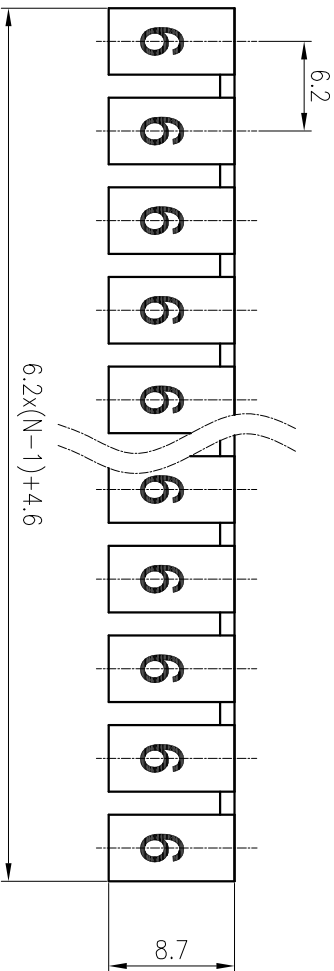


公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±Z

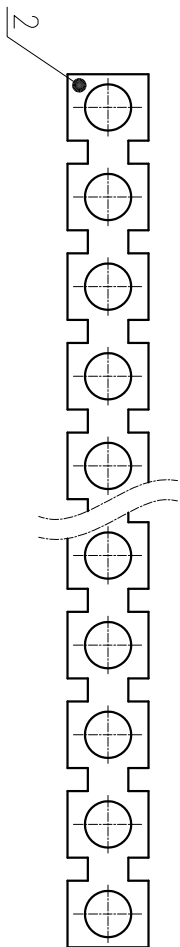

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
	螺丝扭矩/Torque	Tightening(N·m/Lb.in)	M3.0.5/4.43
	间距/Pitch (mm)	螺距范围/Pitch	6.2/N=02~10P
	使用温度范围/Operating temperature(°C)		-40~+105
载流体与螺丝分开包装于同一封盒中/Current carrier and Screws should be packed individually,which must be put in the same box			
符合RoHS环保要求/Conform to RoHS			
Yes			

SURFACE: /

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: FBIXX-6

MAT NO.: /
STATUS: /
APPD: Li GL 2020.06.04
CHKD: Mao J 2020.06.04
DRFT: Chen K 2020.06.04

DRAWING NO.: FBIXX-6-C01

REV ECN DESCRIPTION DRFT DATE

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

1

2

3

4

5

6

D

C

B

A

D

C

B

A