



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless and until authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利权明确标注外，否则禁止转让、复制或、利用。未经授权擅自复制或传播，侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

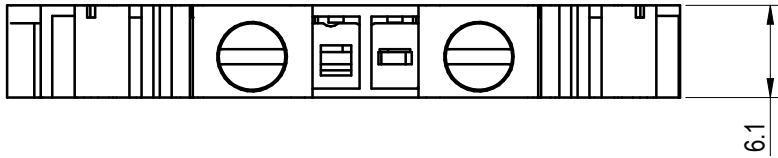


6.1

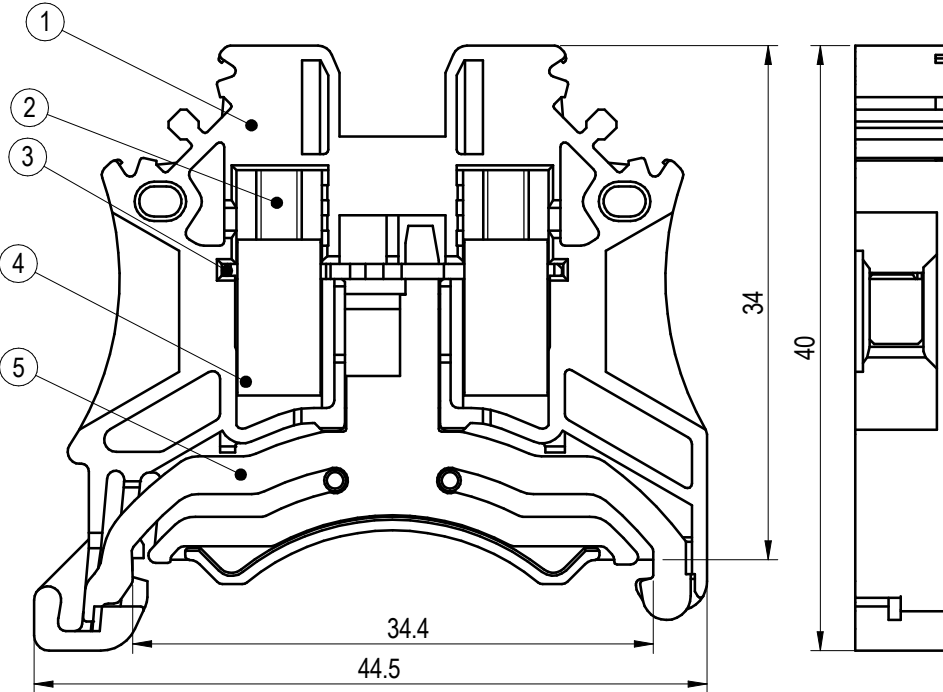

未注公差/General tolerances(mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.65/6.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	24~10/0.2~6(sol&str)		
间距/Pitch(mm)/线数范围/Poles	6.1/N=01P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

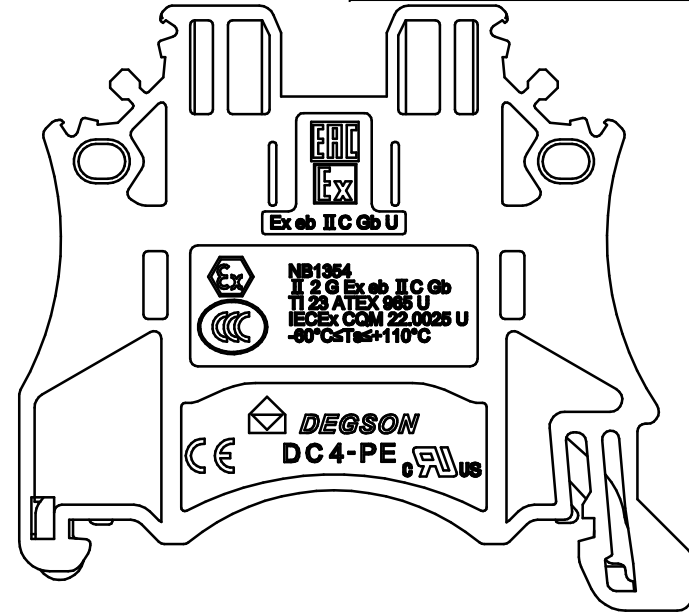

5	Grounding	Copper alloy	Sn Plated
4	Cage	Copper alloy	Ni Plated
3	Current carrier	Copper	Sn Plated
2	Screw	Copper alloy	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSION			MATERIAL:	SURFACE/COLOR:
APPD:	Peng M	2024.01.29	MAT NO./REV:	11020000274-1 / 00
CHKD:	Gao WG	2024.01.29	MAT STATUS: 设计放行	
DRFT:	Deng L	2024.01.29	NAME	
			DC4-Cu-PE-01P-1C-00A(H)	
REV	ECN	DESCRIPTION	DRFT	DATE
		Add explosion-proof certification lettering	Deng L	2024.01.29
			DRFT:	DATE
			Deng L	2024.01.29
		DESCRIPTION	DRAWING NO.	TYPE
		DRFT	200268652	CUSTOMER DRAWING
		DESCRIPTION	DRAWING STATUS	SCALE
		DRFT	已发布	2:1
		DESCRIPTION	SCALE	SHEET
		DRFT	2:1	1/1