


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加UL刻字	CSX	08/08/01
△		品名、料号增加环保标示“05”	LJH	12/10/07
△		增加VDE刻字	Zengy	09/05/08
△		增加限位结构	CW	05/18/09

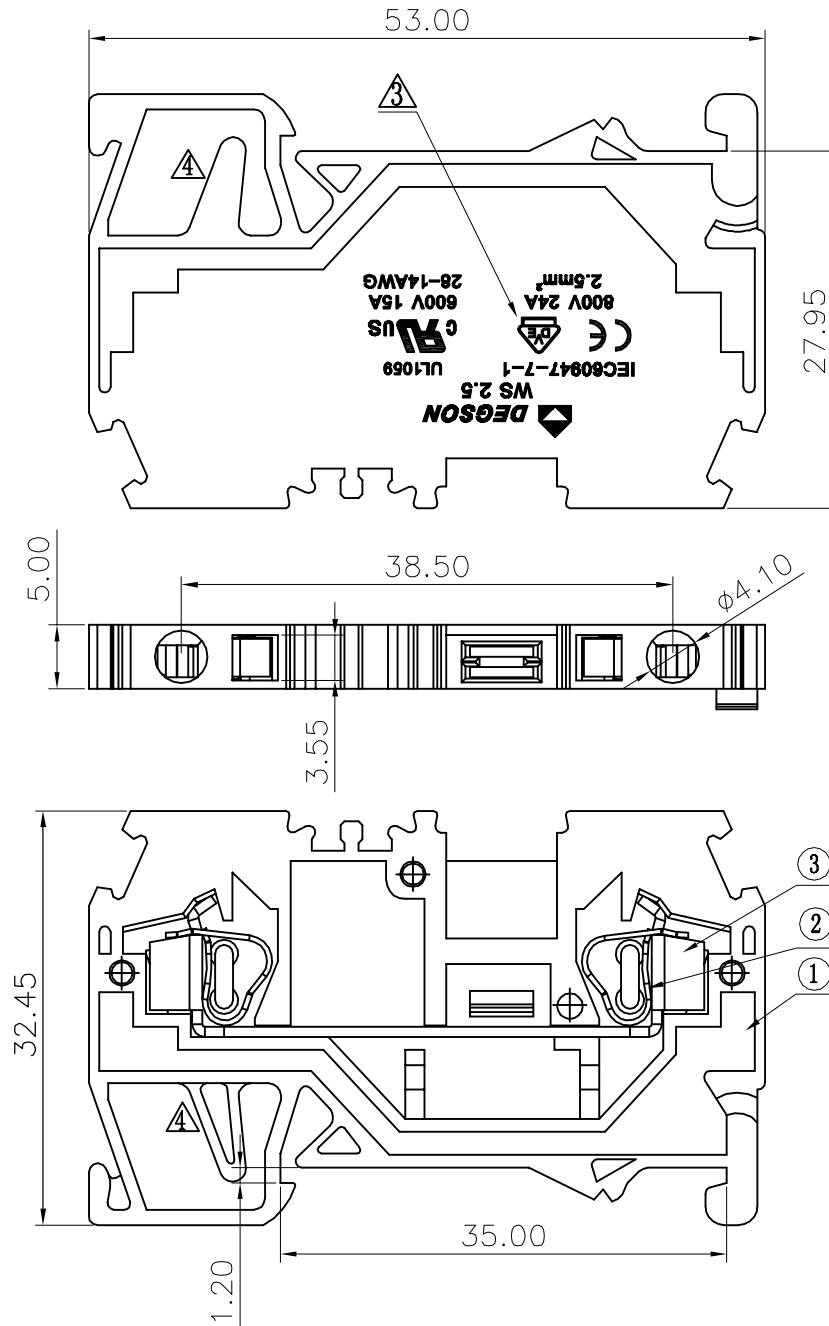

Notes:

1. Rated voltage/current:UL 600V/15A
VDE 800V/24A
2. Operation temperatures:-40°C~+105°C
3. Withstanding Voltage:AC8000V/1Min
4. Insulation Resistance:5000M Ω /DC1000V
5. Wire Range:28~14AWG, 2.5mm²
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						—
	over 6	over 10		over 30	over 60	over 100	over 150	⤿
to	to 6	to 10	to 30	to 60	to 100	to 150		▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	WS 2.5-Current Carrier	6027B00010 (H)	1	Copper	SnCe plated
2	DG242-5.0-Shrapnel	X000000990 (H)	2	Stainless steel	
1	WS 2.5-Housing	6027A0Y01A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETO LDK		DATE 12/01/06"	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME WS2.5-01P-1Y-00A (H)		
CHKD		DATE			
MFO		DATE			
APPL		DATE			
MATERIAL :					
ANGLES ± 1°		G. E :			
FINISH :		DRAWING NO. WS2.5-E01			
SCALE : 1:1		/PART NO.			
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING			
				SHEET 1	OF 1