

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic


TA1360ANG

YCbCr/YPbPr Signal and Sync Processor for Digital TV, Progressive Scan TV and Double Scan TV

The TA1360ANG integrates an analog component signal (YCbCr/YPbPr) processor and sync processor in a 56-pin shrink DIP plastic package. The IC is ideal for digital TVs, progressive TVs, and double scan TVs.

The luminance block and the color difference block incorporate the high performance signal processing circuits. The sync processor block supports 525I/60, 625I/50, 525P/60, 625P/50, 1125I/50, 1125I/60, 750P/60, (750P/50), PAL100 Hz, NTSC120 Hz, and SVGA/60(VESA).

The TA1360ANG incorporates the I²C bus. The device can control various functions via the bus line.

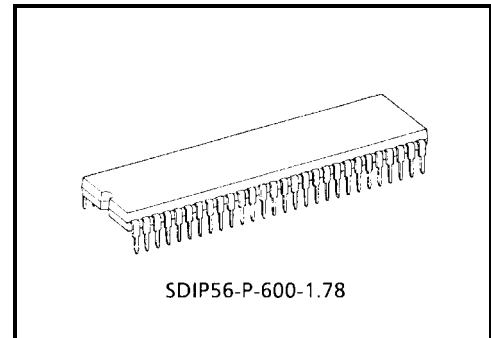

Weight: 5.55 g (typ.)

Features

Luminance Block

- Black stretch circuit and DC restoration rate correction circuit
- Dynamic γ correction circuit (gray scale correction)
- SRT (LTI)
- Y group delay correction (shoot balance correction)
- High-bright color circuit
- Color detail enhancer (CDE)
- White pulse limiter (WPL)
- VSM output

Color difference Block

- Fresh color correction
- Dynamic Y/C correction circuit
- Color SRT (CTI)
- Color γ circuit
- Green stretch
- Blue stretch


Text Block

- OSD blending SW
- ACB (only black level)
- Two analog RGB inputs


Synchronization Block

- Horizontal sync (15.75 k, 28.125 k, 31.5 k, 33.75 k, 37.9 k, 45 kHz)
- Vertical sync (525I/P, 625I/P, 750P, 1125I/P, PAL 100 Hz/NTSC 120 Hz)
- 2- and 3-level sync separator circuit
- HD/VD input (positive and negative polarities)
- Copy guard
- Vertical blanking

Block Diagram

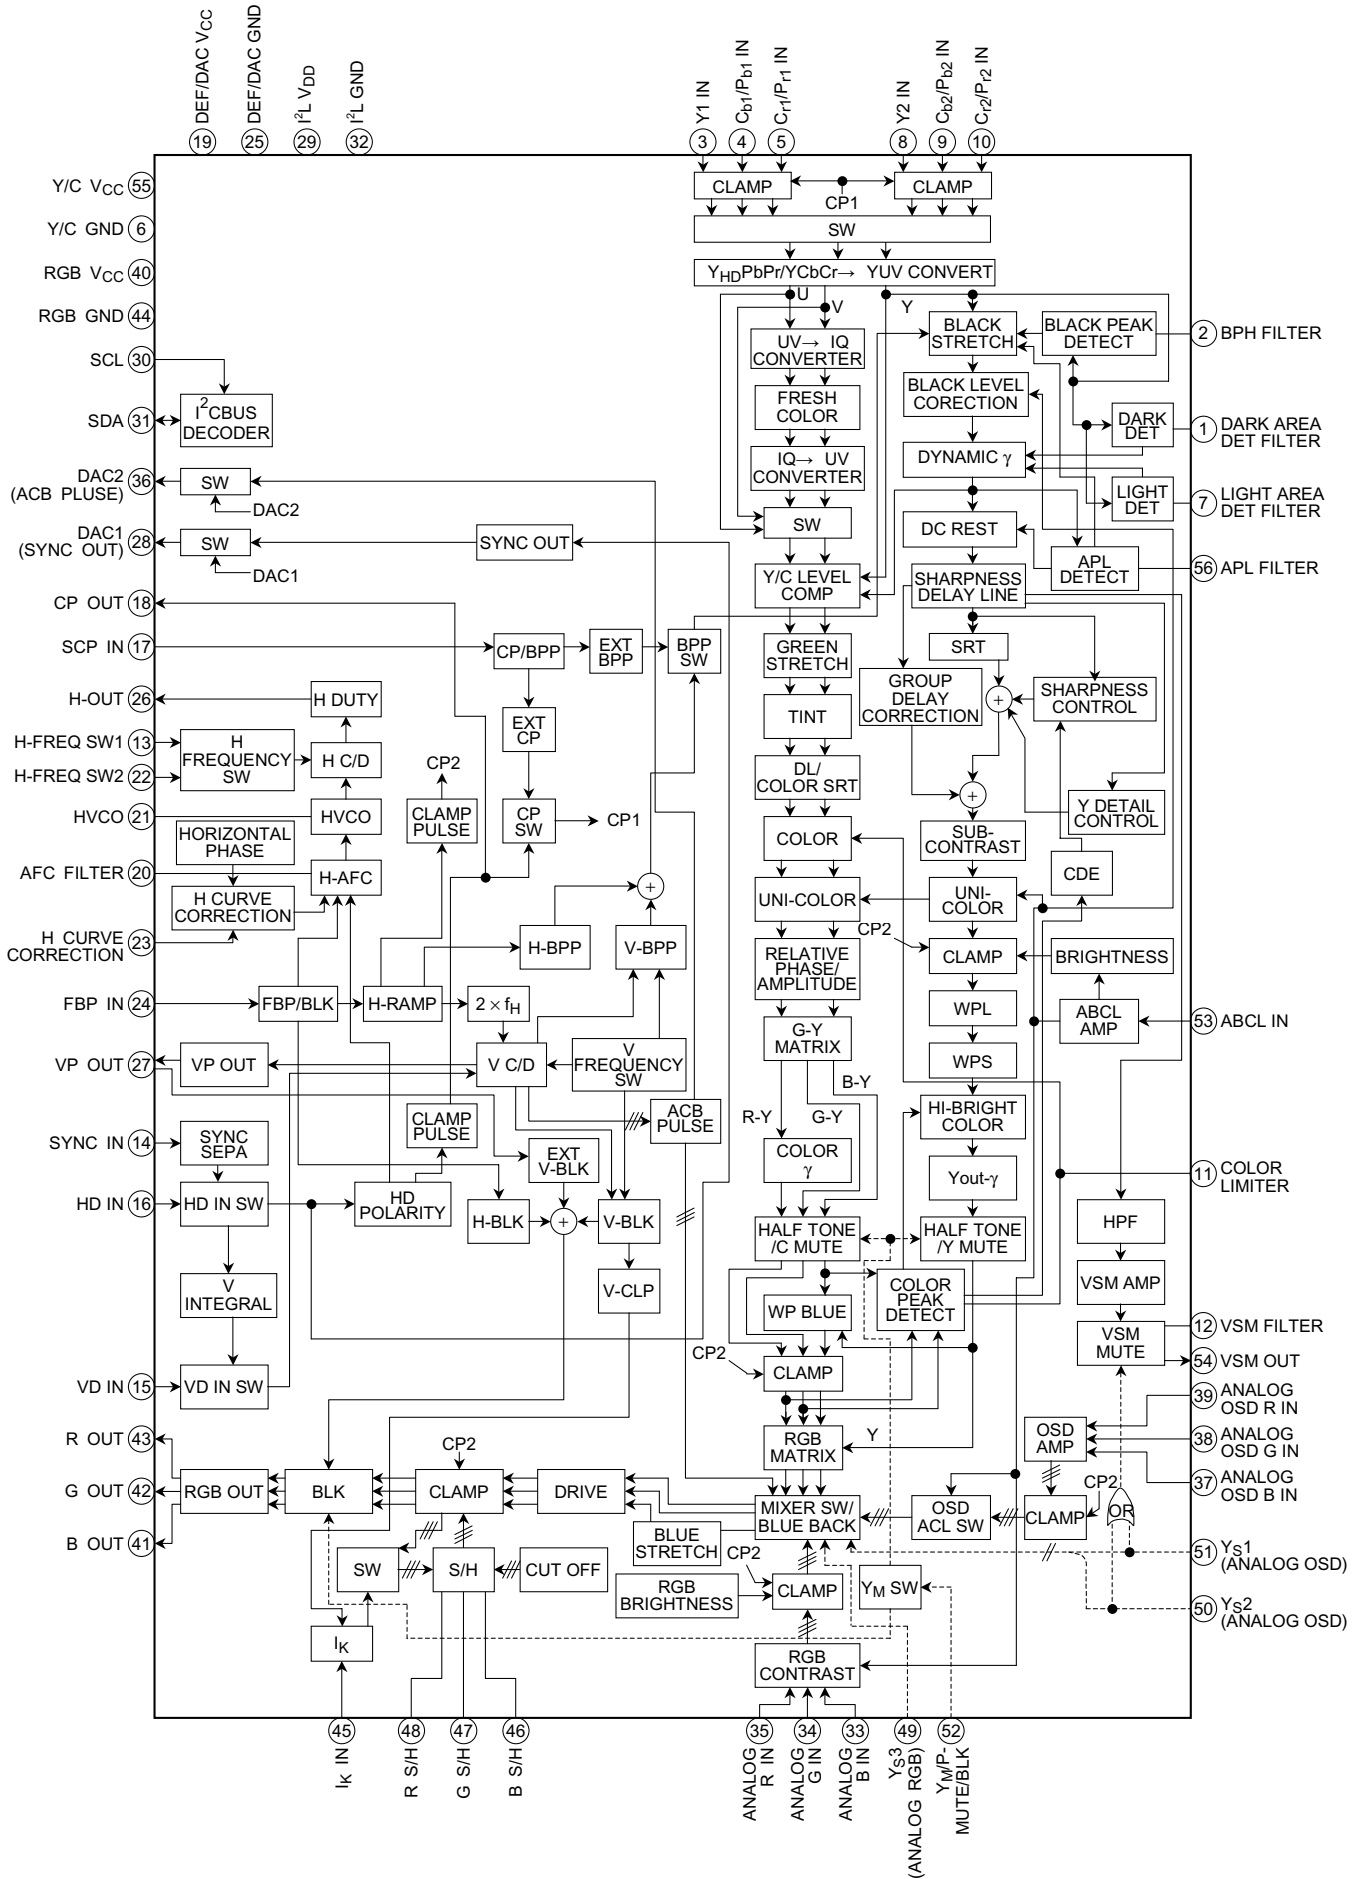

Pin Assignment

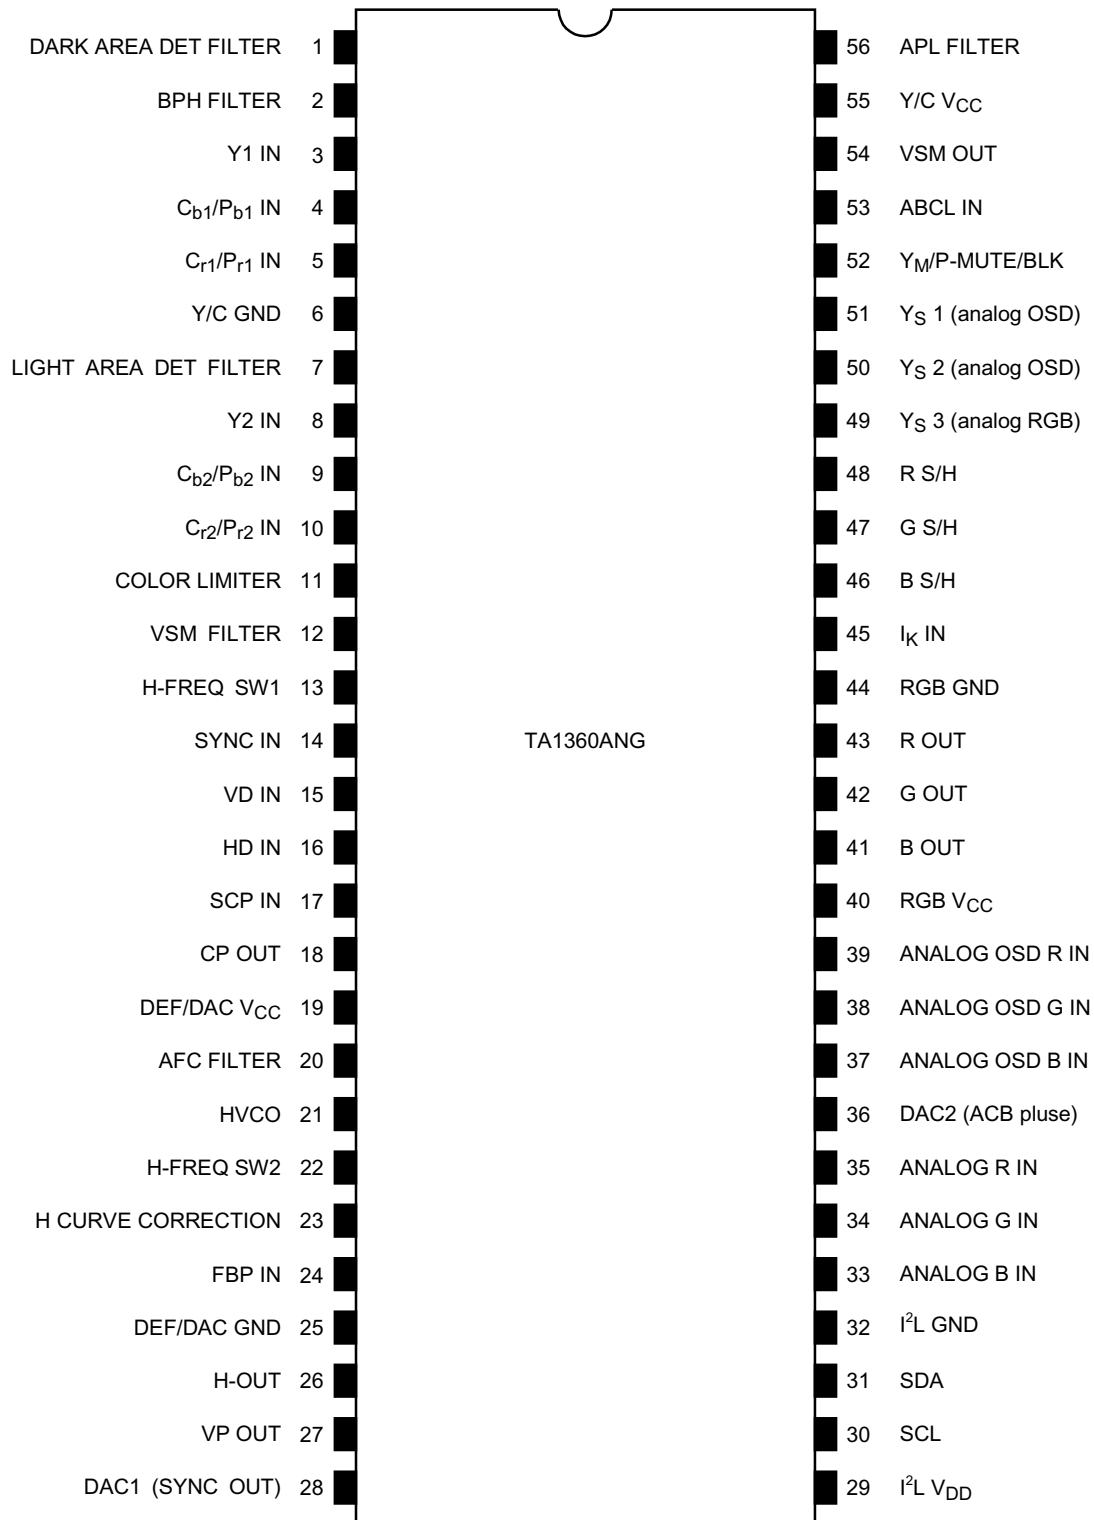








Pin Functions






| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal |
|---------|-------------------------------------|---|-------------------|--|
| 1 | DARK AREA DET FILTER | Connects filter for detecting dark area. Voltage of this pin controls dynamic γ circuit gain for dark area. | | DC |
| 2 | BPH FILTER | Connects filter for detecting black peak. Voltage of this pin controls black stretch gain. Leaving Y open and setting the test circuit SW 2 = C enable to monitor H/V-BPP (black-stretch-stop pulse) width. | | DC |
| 3 | Y1 IN | Inputs Y1 signal via clamp capacitor. | | 1 Vp-p (including sync) at 100% color bar or |
| 4 | C _{b1} /P _{b1} IN | Inputs C _{b1} /P _{b1} signal via clamp capacitor. | | 700 mVp-p at 100% color bar for C _{b1} /P _{b1} |
| 5 | C _{r1} /P _{r1} IN | Inputs C _{r1} /P _{r1} signal via clamp capacitor. | | 700 mVp-p-700 mVp-p at 100% color bar for C _{r1} /P _{r1} |
| 6 | Y/C GND | GND pin for Y/C block | — | — |
| 7 | LIGHT AREA DET FILTER | Connects filter for detecting light area. Voltage of this pin controls dynamic γ circuit gain for light area. | | DC |

| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal |
|---------|-------------------------------------|---|-------------------|--|
| 8 | Y2 IN | Inputs Y2 signal via clamp capacitor. | | <p>1 V_{p-p} (including sync) at 100% color bar</p> <p>or</p> |
| 9 | C _{b2} /P _{b2} IN | Inputs C _{b2} /P _{b2} signal via clamp capacitor. | | 700 mV _{p-p} at 100% color bar for C _{b1} /P _{b1} |
| 10 | C _{r2} /P _{r2} IN | Inputs C _{r2} /P _{r2} signal via clamp capacitor. | | 700 mV _{p-p} -p700 mV _{p-p} at 100% color bar for C _{r1} /P _{r1} |
| 11 | COLOR LIMITER | Connects filter for detecting color limit. | | DC |
| 12 | VSM FILTER | Connects VSM output filter. Connect 0.01-μF capacitor between this pin and GND. | | DC |
| 13 | H-FREQ SW1 | Switches horizontal frequency (Switch 1). Leave this pin open when horizontal frequency is switched by Bus controlling. Controlling this pin prevails over Bus control. (Refer to Table 1: Bus control function.) When this IC is used for CRT, connect this pin to DEF V _{CC} (pin 19) or DEF GND (pin 25). If it is not necessary to control this pin on CRT, connect this pin directly to DEF V _{CC} or DEF GND on the PCB. | | DEF V _{CC} or DEF GND |
| 14 | SYNC IN | Inputs Y signal with sync signal via clamp capacitor. | | <p>White 100%: 1 V_{p-p}</p> <p>or</p> |

| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal |
|---------|-------------------------|---|-------------------|---|
| 15 | VD IN | Inputs vertical sync VD signal. Inputs positive- or negative-polarity signals. | | |
| 16 | HD IN | Inputs horizontal sync HD signal. Inputs positive- or negative-polarity signals. | | |
| 17 | SCP IN | Inputs SCP from up converter. Input signals are clamp pulse (CP) and black peak detection stop pulse (BPP). | | <p>2.2 V to 2.8 V : BPP 4.2 V to 9 V : CP</p> |
| 18 | CP OUT | Outputs internal clamp pulse (CP). | | |
| 19 | DEF/DAC V _{CC} | V _{CC} pin for DEF/DAC block. See "Maximum Ratings" about the voltage. | — | — |
| 20 | AFC FILTER | Connects filter for detecting AFC. | | DC |
| 21 | HVCO | Connects ceramic oscillator for horizontal oscillation. Use Murata "CSBLA503KECZF30". | | — |

| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal | | | | | | | | | | | | | | | | |
|----------------|--------------------|---|-------------------|--|-------------|----------|--------|----------|--------|----------|-------------|----------|------------|---------------|----------------|----------|----------------|----------|----------------|---------------|
| 22 | H-FREQ SW2 | <p>Switches horizontal frequency (Switch 2).</p> <p>Leave this pin open when horizontal frequency is switched by Bus controlling. Controlling this pin prevails over Bus control. (Refer to Table 1: Bus control function.)</p> <p>When this IC is used for CRT, frequency of horizontal output (pin 26) is controlled according to voltage of this pin. DC voltage that is generated by dividing resistor of DEF V_{CC} (pin 19) should be used to control this pin.</p> | | <p>At BUS control (horizontal frequency) : output voltage value</p> <table border="0"> <tr> <td>28 k/15 kHz</td> <td>: DC 9 V</td> </tr> <tr> <td>31 kHz</td> <td>: DC 6 V</td> </tr> <tr> <td>33 kHz</td> <td>: DC 3 V</td> </tr> <tr> <td>37 k/45 kHz</td> <td>: DC 0 V</td> </tr> </table> <p>At pin 22 control, horizontal frequency and input voltage value</p> <table border="0"> <tr> <td>0 to 1.0 V</td> <td>: 37 k/45 kHz</td> </tr> <tr> <td>2.0 V to 4.0 V</td> <td>: 33 kHz</td> </tr> <tr> <td>5.0 V to 7.0 V</td> <td>: 31 kHz</td> </tr> <tr> <td>8.0 V to 9.0 V</td> <td>: 28 k/15 kHz</td> </tr> </table> | 28 k/15 kHz | : DC 9 V | 31 kHz | : DC 6 V | 33 kHz | : DC 3 V | 37 k/45 kHz | : DC 0 V | 0 to 1.0 V | : 37 k/45 kHz | 2.0 V to 4.0 V | : 33 kHz | 5.0 V to 7.0 V | : 31 kHz | 8.0 V to 9.0 V | : 28 k/15 kHz |
| 28 k/15 kHz | : DC 9 V | | | | | | | | | | | | | | | | | | | |
| 31 kHz | : DC 6 V | | | | | | | | | | | | | | | | | | | |
| 33 kHz | : DC 3 V | | | | | | | | | | | | | | | | | | | |
| 37 k/45 kHz | : DC 0 V | | | | | | | | | | | | | | | | | | | |
| 0 to 1.0 V | : 37 k/45 kHz | | | | | | | | | | | | | | | | | | | |
| 2.0 V to 4.0 V | : 33 kHz | | | | | | | | | | | | | | | | | | | |
| 5.0 V to 7.0 V | : 31 kHz | | | | | | | | | | | | | | | | | | | |
| 8.0 V to 9.0 V | : 28 k/15 kHz | | | | | | | | | | | | | | | | | | | |
| 23 | H CURVE CORRECTION | <p>Adjusts screen curve at high voltage fluctuation. Input AC component of high voltage fluctuation.</p> <p>When not used, connect 0.01-μF capacitor between this pin and GND.</p> | | DC | | | | | | | | | | | | | | | | |
| 24 | FBP IN | <p>Inputs FBP for horizontal AFC.</p> <p>Sets H-BLK width.</p> | | | | | | | | | | | | | | | | | | |
| 25 | DEF/DAC GND | GND pin for DEF/DAC block | — | — | | | | | | | | | | | | | | | | |
| 26 | H-OUT | Horizontal output pin. Open-collector output. | | | | | | | | | | | | | | | | | | |
| 27 | VP OUT | <p>Outputs vertical pulse.</p> <p>Applying current to this pin, performs external blanking by OR-ing with internal blanking.</p> <p>Note: Changing H-position varies VP output width. Use the start phase only for VP output.</p> | | <p>VP output:</p> <p>Start phase</p> <p>V-BLK input current: 780 μA to 1 mA</p> | | | | | | | | | | | | | | | | |
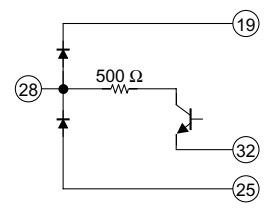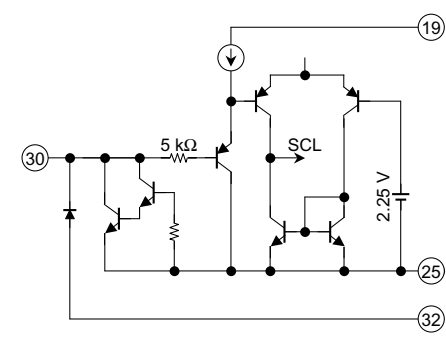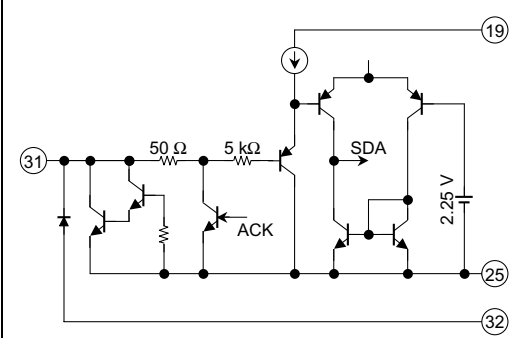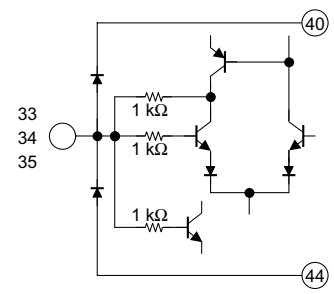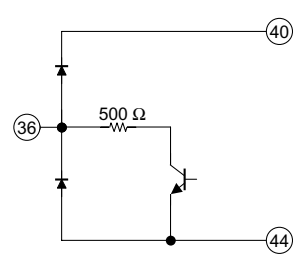
| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal |
|----------------|---|---|--|--|
| 28 | DAC1 (SYNC OUT) | Outputs 1-bit DAC or separated SYNC. Open-collector output. |  | DC or SYNC OUT  |
| 29 | I ² L V _{DD} | V _{DD} pin for I ² L block. Connects 2 V (typ.). Supply power via zener diode through resistor from pin 19. (See "Application Circuit".) | — | — |
| 30 | SCL | SCL pin for I ² C BUS |  | — |
| 31 | SDA | SDA pin for I ² C BUS |  | — |
| 32 | I ² L GND | GND pin for I ² L block | — | — |
| 33 34 35 | ANALOG B IN ANALOG G IN ANALOG R IN | Inputs analog R/G/B signal via clamp capacitor. |  | 100 IRE: 0.7 Vp-p (not including sync) |
| 36 | DAC2 (ACB pulse) | Outputs 1-bit DAC or pulse over ACB period. Open-collector output. |  | DC or ACB PULSE  |
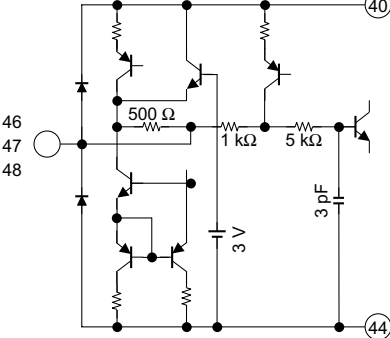
| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal |
|----------------|--|---|--|---|
| 37 38 39 | ANALOG OSD B IN ANALOG OSD G IN ANALOG OSD R IN | Inputs analog OSD signal via clamp capacitor. |  | 100 IRE: 0.7 Vp-p (not including sync) |
| 40 | RGB V _{CC} | V _{CC} pin for text/RGB block. See "Maximum Ratings" about the supply voltage. | — | — |
| 41 42 43 | B OUT G OUT R OUT | Outputs R/G/B signal. Recommended output amplitude: 100 IRE = 2.3 Vp-p |  | 100 IRE: 2.3 Vp-p Conditions: UNI-COLOR = max SUB-CONT = Cent Y IN = 0.7 Vp-p |
| 44 | RGB GND | GND pin for text/RGB block. | — | — |
| 45 | I _k IN | Inputs feedback signal from CRT. (BLK level should be 0 to 3 V.) When ACB function is not used, connect this pin to RGB V _{CC} pin. |  | 1 Vp-p (typ.) R G B 0 to 3 V or RGB V _{CC} |
| 46 47 48 | B S/H G S/H R S/H | S/H (sample-and-hold) pin. In ACB Mode, connect 2.2-μF capacitor. In CUT-OFF Mode, connect 0.01-μF capacitor. |  | DC |
| 49 | Y _{S3} (analog RGB) | Switches internal RGB and external analog RGB input. VSM output is muted when analog RGB is selected. |  | 0 to 0.5 V : Internal 1.5 V to 9 V : Analog RGB, VSM Mute |

| Pin No. | Pin Name | Function | Interface Circuit | Input Signal/Output Signal | | | | | | | | | | | | | | | |
|------------------|--|---|-------------------|--|------------------------------------|---|---|------|---|---|-----|---|---|-----|---|---|------|--|---|
| 50 51 | Y _S 2 (analog OSD) Y _S 1 (analog OSD) | <p>Switches internal RGB and OSD input signals.</p> <p>The blend ratio of internal RGB and OSD signals can be adjusted according to applying voltage to pins Y_S1 and Y_S2.</p> <p>VSM output is muted when Y_S1 or Y_S2 pin is set to High.</p> <table border="1"> <thead> <tr> <th>Y_S2</th> <th>Y_S1</th> <th>Blend ratio Int RGB: OSD RGB</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>L</td> <td>10:0</td> </tr> <tr> <td>H</td> <td>L</td> <td>7:3</td> </tr> <tr> <td>L</td> <td>H</td> <td>5:5</td> </tr> <tr> <td>H</td> <td>H</td> <td>0:10</td> </tr> </tbody> </table> | Y _S 2 | Y _S 1 | Blend ratio Int RGB: OSD RGB | L | L | 10:0 | H | L | 7:3 | L | H | 5:5 | H | H | 0:10 | | <p>0 to 0.5 V : Internal</p> <p>1.1 V to 1.7 V : VSM Mute</p> <p>2.9 V to 9 V : OSD, VSM Mute</p> |
| Y _S 2 | Y _S 1 | Blend ratio Int RGB: OSD RGB | | | | | | | | | | | | | | | | | |
| L | L | 10:0 | | | | | | | | | | | | | | | | | |
| H | L | 7:3 | | | | | | | | | | | | | | | | | |
| L | H | 5:5 | | | | | | | | | | | | | | | | | |
| H | H | 0:10 | | | | | | | | | | | | | | | | | |
| 52 | Y _M /P-MUTE/BLK | <p>High-speed halftone switch for internal RGB signal.</p> <p>Enables picture mute and blanking.</p> | | <p>0 to 0.5 V : Internal</p> <p>1.2 V to 1.8 V : Half Tone</p> <p>2 V.7 to 4.0 V : P-Mute</p> <p>7 V to 9 V : Blanking</p> | | | | | | | | | | | | | | | |
| 53 | ABCL IN | <p>Inputs ABL and ACL signals.</p> <p>Sets gain and start point of ABL and dynamic ABL signal according to bus controlling.</p> | | DC | | | | | | | | | | | | | | | |
| 54 | VSM OUT | <p>Outputs Y signal for VSM that passed through HPF circuit (first differential circuit).</p> <p>Output signals are muted according to pins 49, 50, and 51.</p> | See pin 12. | — | | | | | | | | | | | | | | | |
| 55 | Y/C V _{CC} | <p>V_{CC} pin for Y/C block.</p> <p>See "Maximum Ratings" about the supply voltage.</p> | — | — | | | | | | | | | | | | | | | |
| 56 | APL FILTER | <p>Connects filter for correcting DC restoration rate.</p> <p>Leaving this pin open enables to monitor Y signal after black stretch and dynamic γ.</p> | | — | | | | | | | | | | | | | | | |

Bus Control Map

Write Data

Slave Address: 88H

| Sub-Add | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | Preset |
|---------|--------------------------|---------------|---------------|------------------------|-------------------------|--------------------|------------------------|--------------|-------------|
| 00 | H-FREQ1 | | H-DUTY | YUV-SW | DAC1 | DAC2 | SYNC-SW | H-FREQ2 | 1000 : 0000 |
| 01 | HORIZONTAL POSITION | | | | | | | CLP-PHS | 1000 : 0000 |
| 02 | ACB-MODE | | SCP-SW | HBP-PHS1 | SYNC SEP-LEVEL | | TEST | | 1000 : 0000 |
| 03 | V-BLK PHASE | | | | VERTICAL FREQUENCY | | | | 1000 : 0000 |
| 04 | COMPRESSION-BLK PHASE-1 | | | | COMPRESSION-BLK PHASE-2 | | | | 1000 : 0000 |
| 05 | P-MODE1 | UNI-COLOR | | | | | | | 1000 : 0000 |
| 06 | BRIGHTNESS | | | | | | | | 1000 : 0000 |
| 07 | OSD-ACL | COLOR | | | | | | | 1000 : 0000 |
| 08 | TINT | | | | | | | HBP-PHS2 | 1000 : 0000 |
| 09 | PICTURE SHARPNESS | | | | | | | BLS γ | 1000 : 0000 |
| 0A | RGB BRIGHTNESS | | | | | | | DCRR-SW | 1000 : 0000 |
| 0B | HI BRT | RGB CONTRAST | | | | | | | 1000 : 0000 |
| 0C | SUB CONTRAST | | | | WPS | YUV MODE | Y-OUT γ | | 1000 : 0000 |
| 0D | DRIVE GAIN1 | | | | | | | DR-R | 1000 : 0000 |
| 0E | DRIVE GAIN2 | | | | | | | DR-B/G | 1000 : 0000 |
| 0F | R CUT OFF | | | | | | | | 1000 : 0000 |
| 10 | G CUT OFF | | | | | | | | 1000 : 0000 |
| 11 | B CUT OFF | | | | | | | | 1000 : 0000 |
| 12 | R-Y/B-Y GAIN | | | | R-Y/B-Y PHASE | | | | 1000 : 0000 |
| 13 | G-Y/B-Y GAIN | | | | G-Y/B-Y PHASE | | | | 1000 : 0000 |
| 14 | COLOR SRT TRAN | C FREQ | GREEN STRETCH | | COLOR γ | | CLT | | 1000 : 0000 |
| 15 | C.D.E. | Y/C GAIN COMP | | BL STRETCH GAIN | | FLESH | H-SHIFT | | 1000 : 0000 |
| 16 | VSM PHASE | | | VSM GAIN | | | APACON PEAK FREQ | | 1000 : 0000 |
| 17 | DC REST POINT | | | DC REST RATE | | | DC REST LIMIT | | 1000 : 0000 |
| 18 | BLACK STRETCH POINT | | | APL VS BSP | | B.L.C. | B.D.L | BS-AREA | 1000 : 0000 |
| 19 | SRT-GAIN | | | | WPL-LEVEL | | | | 1000 : 0000 |
| 1A | D-ABL POINT | | D-ABL GAIN | | BL STRETCH POINT | | P-MODE2 | | 1000 : 0000 |
| 1B | ABL POINT | | | ABL GAIN | | | RGB OUT MODE | | 1000 : 0000 |
| 1C | DYNC γ GAIN | | BS-CHAR1 | STATIC γ GAIN-1 | | | STATIC γ GAIN-2 | | 1000 : 0000 |
| 1D | OSD BRIGHT | | OSD CONTRAST | | Y/C-DL1 | DYNC γ AREA | | | 1000 : 0000 |
| 1E | Y DETAIL CONTROL | | | | BS-CHAR2 | WP BLUE POINT | | | 1000 : 0000 |
| 1F | Y GROUP DELAY CORRECTION | | | | Y/C-DL2 | WP BLUE GAIN | | | 1000 : 0000 |

Read Data

Slave Address: 89H

| | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---|-----|-------|---------|--------|-------|--------|--------|---------|
| 0 | POR | IK-IN | RGB-OUT | YUV-IN | H-OUT | VP-OUT | RGB-IN | SYNC-IN |

Bus Control Features

Write Mode

| Resister Name | Description | Preset Value |
|---------------------|--|--------------------|
| H-FREQ1/2 | Switches horizontal oscillation frequency. (See the appendix 1) | 33.75 kHz |
| H-DUTY | Switches horizontal output duty. 0: 41% 1: 47% | 41% |
| YUV-SW | Switches YUV input. 0: INPUT-1 (Y1/C _{b1} /C _{r1}) 1: INPUT-2 (Y2/C _{b2} /C _{r2}) | INPUT-1 |
| DAC 1 | Switches DAC controlling output. 0: OPEN (high) 1: ON (low) Controls 1-bit DAC of open-collector when TEST is 00. Outputs H/C-SYNC from pin 28 when TEST is 01. | OPEN |
| DAC 2 | Switches DAC controlling output. 0: ON (low), 1: OPEN (high) Controls 1-bit DAC of open-collector when TEST is 00. Outputs ACB reference pulse from pin 36 when TEST is 01. | ON |
| SYNC-SW | Switches sync input. 0: Selects HD/VD input. 1: Selects SYNC input. | HD/VD |
| HORIZONTAL POSITION | Adjusts horizontal picture position (phase). 0000000: -12.5% 1111111: +12.5% Note: VP output width (pin 27) varies with a change of horizontal position. | CENTER |
| CLP-PHS | Switches clamp pulse phase. 0: 0.7- μ s (2.5%) width, 1.1- μ s (3.8%) delay from HD stop phase. 1: 0.7- μ s (2.4%) width, 0.2- μ s (0.7%) delay from HD stop phase when no signal, 0.8- μ s (2.7%) width that is 1.2- μ s (4.2%) delay from FBP start phase. Also switches CP phase of CP-OUT (pin 18). | 1.1- μ s delay |
| ACB MODE | Sets ACB mode; Sets converged reference level. 00: ACB OFF (cutoff BUS control), 01: ACB ON (5 IRE), 10: ACB ON (10 IRE) 11: ACB ON (20 IRE) | ACB ON (10 IRE) |
| SCP-SW | SCP (sand castle pulse) Switches modes. 0: Internal Mode 1: External input Mode | Internal Mode |
| HBP-PHS1/2 | Switches phase of black-stretch-detection stop pulse. HBP-PHS1 = 0 and HBP-PHS2 = 0: FBP \pm 3% HBP-PHS1 = 0 and HBP-PHS2 = 1: FBP \pm 8% HBP-PHS1 = 1 and HBP-PHS2 = 0: FBP \pm 13% HBP-PHS1 = 1 and HBP-PHS2 = 1: FBP \pm 18% Leaving Y open and setting the test circuit SW 2 to C enable to monitor H/V-BPP (black-stretch-detection stop pulse) width through pin 2. | \pm 3% |
| SYNC SEP-LEVEL | Switches Sync SEP-level. 00: 16% 01: 24% 10: 32% 11: 40% (At 1125I/60) | 16% |
| TEST | Test Mode: Controls 1-bit DAC of open-collector when TEST is 00. Outputs H/C-SYNC from pin 28, and ACB reference pulse from pin 36 when TEST is 01. Do not set TEST to 10/11 for that is shipment TEST Mode. | 00 |

| Resister Name | Description | Preset Value |
|---------------------------|---|----------------|
| V-BLK PHASE | Switches vertical BLK stop phase. 00000: 16 H~ 11110: 46 H (1 H/STEP) 11111: Internal H/V-BLK OFF Please set ACB Mode to OFF when internal H/V-BLK is OFF (11111). | 32 H |
| V-FREQUENCY | Vertical free-run frequency: Sets V pull-in range. (See Appendix 2.) | 1281 H |
| COMPRESSION-BLK PHASE-1/2 | Compression BLK phase: Sets BLK for upper and lower parts of screen. (See Appendix 3.) | CENTER, OFF |
| P-MODE1/2 | Picture Mode: Sets picture mute, halftone, blue background, and Y mute. (See Appendix 4.) | P-MUTE 1 |
| UNI-COLOR | Unicolor adjustment: 0000000: -16dB~ 1111111: 0dB | min |
| BRIGHTNESS | Brightness adjustment: 00000000: -40 IRE 11111111: +40 IRE | CENTER |
| OSD-ACL | OSD-ACL; 0: OFF 1: ON | ON |
| COLOR | Color adjustment: 0000000: COLOR MUTE, 0000001: -20dB or more 1111111: +4dB | C-MUTE |
| TINT | Tint adjustment: 0000000: -32 deg~ 1111111: +32 deg | ±0 deg |
| PICTURE-SHARPNESS | Sharpness adjustment: 0000000: -10dB or more 1000000: +10dB 1111111: +17.5dB (at peak FREQ) | CENTER |
| BLS _γ | Blue stretch γ correction: B-axis correction 0: OFF 1: ON | OFF |
| RGB-BRIGHTNESS | RGB brightness: 0000000; -20 IRE~ 1111111; +20 IRE | CENTER |
| DCRR-SW | Switches DC restoration rate. 0: 100% or higher 1: 100% or lower | 100% or higher |
| HI BRT | High-bright color: 0: OFF 1: ON | ON |
| RGB-CONTRAST | RGB contrast: 0000000: -16.5dB 1111111: 0dB | min |
| SUB-CONTRAST | Sub-contrast: 00000: -3.3dB 11111: +2.5dB | CENTER |
| WPS | WPS level: 0: 110 IRE 1: 130 IRE | 110 IRE |
| YUV MODE | Y/color-difference input Mode: 0: Y/Cb/Cr, 1: Y/Pb/Pr (Remarks) Y/Cb/Cr: ITU-R BT 601 Y/Pb/Pr: ITU-R BT 709 (1125/60/2:1) | Y/Cb/Cr |
| Y-out _γ | Y-out gamma control: 0: OFF 1: ON | OFF |
| DRIVE GAIN1/2 | Drive gain 1/2; 0000000: -5dB 1111111: +3dB | CENTER |
| DR-R DR-B/G | Switches RGB drive gain base. (See Appendix 5.) | R |

| Resister Name | Description | Preset Value |
|-------------------|--|--------------|
| R/G/B CUT OFF | R/G/B cutoff: 1) At ACB-OFF RGB-OUT 00000000: 1.9 V 11111111: 2.9 V 2) At ACB-ON SENS-IN 00000000: 0.5 Vp-p 11111111: 1.5 Vp-p | CENTER |
| R-Y/B-Y GAIN | Switches R-Y/B-Y relative amplitude: 0000: min (0.45) 1111: max (0.9) | CENTER |
| R-Y/B-Y PHASE | Switches R-Y/B-Y relative phase: 0000: min (90 deg) 1111: max (111.5 deg) | min |
| G-Y/B-Y GAIN | Switches G-Y/B-Y relative amplitude: 0000: min (0.25) 1111: max (0.48) | CENTER |
| G-Y/B-Y PHASE | Switches G-Y/B-Y relative phase: 0000: min (232 deg) 1111: max (254 deg) | min |
| COLOR SRT TRAN | Color SRT transient: Color-difference transient improvement 00: C-SRT OFF~ 11: max | CENTER |
| C FREQ | Color SRT peak frequency: 0: 4.5 MHz 1: 5.8 MHz | 4.5 MHz |
| GREEN STRETCH | Green stretch: 00: OFF~ 11: max (+3dB) | OFF |
| COLOR γ | Color γ correction point 00: OFF, 01: 0.23 Vp-p, 10: 0.40 Vp-p, 11: 0.58 Vp-p | OFF |
| CLT | Color limiter level: 0: 1.65 Vp-p, 1: 2 Vp-p | 1.65 Vp-p |
| CDE | Color detail enhancer: 00: min 11: max | CENTER |
| Y/C GAIN COMP | Dynamic Y/C compensation: Operated when luminance level is made up according to dynamic $Y\gamma$. 00: OFF~ 11: max | OFF |
| BL STRETCH GAIN | Blue stretch gain: B-axis correction 00: OFF 11: max (+6.4dB) | OFF |
| FLESH | Flesh color: Skin tone correction 0: OFF 1: ON (Lead-in angle: ± 33.7 deg) | OFF |
| H-SHIFT | Shifts a center of horizontal picture position (phase): 0: OFF 1: ON (FBP shifts 6.7% against HD) | OFF |
| VSM-PHASE | VSM phase: 000: -37.5 ns 101: normal 111: +15 ns | CENTER |
| VSM GAIN | VSM gain: 000: OFF 001: 0 dB~ 111: +16dB (VSM gain is limited 1.4 Vp-p) | OFF |
| APACON PEAK f_0 | APACON peak frequency: 00: 13.5 MHz 01: 9.5 MHz 10: 7.2 MHz 11: 4.5 MHz | 13.5 MHz |
| DC REST POINT | DC restoration rate correction point: 000: 0% 111: 49% | CENTER |
| DC REST RATE | DC restoration correction rate: 000: 100% 111: 135% (70%) | min |
| DC REST LIMIT | DC restoration rate correction limit point: 00: 67% 01: 77% 10: 80% 11: 80% | min |

| Resister Name | Description | Preset Value |
|------------------------|--|--------------|
| BLACK STRETCH POINT | Black stretch start point 1: 000: OFF 001: 25 IRE~ 111: 55 IRE | CENTER |
| APL VS BSP | Black stretch start point 2: 00: 0 IRE 11: 46 IRE up (at APL 100%) | 0 IRE |
| B.L.C | Black level automatic correction: Up to 6.5 IRE. (Black stretch takes priority.) 0: OFF 1: ON | OFF |
| B.D.L. | Switches black detection level: 0: 3 IRE 1: 0 IRE | 3 IRE |
| BS-AREA | Black stretch area reinforcement: 0: ON 1: OFF | ON |
| SRT-GAIN | SRT gain; Y transient improvement (LTI) 00000: min 11111: max | CENTER |
| WPL-LEVEL | White letters improvement amplitude; 000: min (21 IRE) ~ 110: max (102 IRE) 111: OFF | min |
| D-ABL POINT | Dynamic ABL detection voltage 00: min 11: max | CENTER |
| D-ABL GAIN | Dynamic ABL sensitivity 00: min 11: max | min |
| BL STRETCH POINT | Blue stretch point; B-axis correction 00: min (28 IRE) 11: max (60 IRE) | min |
| ABL POINT | ABL detection voltage 000: min 111: max | CENTER |
| ABL GAIN | ABL sensitivity 000: min 111: max | min |
| RGB-OUT MODE | RGB output mode; RGB output mode SW for test and adjustment 00: Normal 01: R only 10: G only 11: B only | Normal |
| DYNC γ GAIN | Dynamic Y γ gain vs dark area; dynamic γ -correction according to dark area. 00:min~ 11: max (Maximum gain is +6dB included Static Y γ gain for dark area.) | CENTER |
| BS-CHAR1/2 | Black stretch characteristic swich BS-CHAR1 = 0 and BS-CHAR2 = 0: OFF BS-CHAR1 = 0 and BS-CHAR2 = 1: min BS-CHAR1 = 1 and BS-CHAR2 = 0: mid BS-CHAR1 = 1 and BS-CHAR2 = 1: max | OFF |
| STATIC γ GAIN-1 | Static Y γ dark area gain; γ correction for dark area 000: OFF 001: min (-5dB) ~ 11: max (+2.4dB) Note: When STATIC γ GAIN-1 is 000(OFF), set DYNC γ GAIN to min (00), STATIC γ GAIN-2 to OFF (11), and DYNC γ AREA to min (000). | OFF |
| STATIC γ GAIN-2 | Static Y γ light area gain; γ correction for light area 00: max (-8.8dB)~ 11: OFF When 00~10 is set, light area static Y γ and light dynamic Y γ according to light area is operated. | max |
| OSD BRIGHT | OSD brightness: 00: 5 IRE 01: 0 IRE 10: -5 IRE 11: -10 IRE | -5 IRE |
| OSD-CONTRAST | OSD contrast: 00: min (1.7dB) 11: max (0dB) | min |

| Resister Name | Description | Preset Value |
|--------------------------|---|--------------|
| Y/C DL1/2 | Adjusts Y/C phase; adjusts the phase Y before passing through matrix circuit. Y/C DL2 = 0 and Y/C DL1 = 0: -10 ns, Y/C DL2 = 0 and Y/C DL1 = 1: -5 ns Y/C DL2 = 1 and Y/C DL1 = 0: 0 ns, Y/C DL2 = 1 and Y/C DL1 = 1: +5 ns | -10 ns |
| DYNC γ AREA | Dynamic γ dark area detection sensitivity; switches detection sensitivity of dynamic γ of dark area. 000: min~ 111: max | min |
| Y DETAIL CONTROL | Controls Y detail; corrects sharpness of 5.0-MHz peak frequency. 0000:min (trap) 1111: max (+6dB) | CENTER |
| WP BLUE POINT | White peak blue point; 000: OFF 001: min (42 IRE) ~ 111: max (106 IRE) | OFF |
| Y-GROUP DELAY CORRECTION | Y group delay correction; shoot balance correction. 0000: Pre-shoot gain is lowered. (Overshoot gain is raised.) 1111: Overshoot gain is lowered. (Pre-shoot gain is raised.) | CENTER |
| WP BLUE GAIN | White peak blue gain. 000: min (+3dB) 111: max (+10dB) | min |

Appendix 1: Horizontal Frequency

| Pin Voltages (V) | | Bus Data | | | H-Frequency (kHz) |
|----------------------------------|----------------------------------|----------|-------|-------|-------------------|
| Pin 13 | Pin 22 | 00-D0 | 00-D7 | 00-D6 | |
| DEF GND (0~1.0) | DEF V _{CC} (8.0~9.0) | 0 | 0 | 0 | 28.125 |
| | 6.0 (5.0~7.0) | 0 | 0 | 1 | 31.5 |
| | 3.0 (2.0~4.0) | 0 | 1 | 0 | 33.75 |
| | DEF GND (0~1.0) | 0 | 1 | 1 | 37.9 |
| DEF V _{CC} (8.0~9.0) | DEF V _{CC} (8.0~9.0) | 1 | 0 | 0 | 15.75 |
| | 6.0 (5.0~7.0) | 1 | 0 | 1 | 31.5 |
| | 3.0 (2.0~4.0) | 1 | 1 | 0 | 33.75 |
| | DEF GND (0~1.0) | 1 | 1 | 1 | 45 |

Note 1: Controlling pins prevails over BUS control. When the TA1360N is used for CRT, control horizontal oscillation frequency by pins 13 and 22. (See the pin descriptions for details.)

Note 2: Horizontal output frequency may not be switched at once but may takes two steps if switching pins 13 and 22 is controlled at the same time. Switching horizontal output frequency may cause deterioration of the horizontal transistor. Thus, be sure to take account of applications, included software.

Appendix 2; Vertical Frequency

| Data | V Pull-in Range | V-BPP | | Example of Format/V (H)-Frequency |
|------|-----------------|-------------|---------------------------------|---|
| | | Start Phase | Stop Phase | |
| 000 | 48~1281 H | 1100 H | V-BLK P. (C.BLK P.) +20 H | 1125P/30 Hz (33.75 kHz) |
| 001 | 48~849 H | 730 H | | 750P/60 Hz (45 kHz) (750P/50Hz(37.5 kHz)) |
| 010 | 48~725 H | 600 H | | 625P/50 Hz (31.5 kHz) SVGA/60 Hz(37.9 kHz) |
| 011 | 48~660 H | 545 H | | 1125I/50 Hz (28.125 kHz) 1125I/60 Hz (33.75 kHz) |
| 100 | 48~613 H | 500 H | | 525P/60 Hz (31.5 kHz) |
| 101 | 48~363 H | 290 H | | PAL/SECAM/50 Hz (15.625 kHz), 100 Hz (31.5 kHz) |
| 110 | 48~307 H | 240 H | | NTSC/60 Hz (15.734 kHz), 120 Hz (31.5 kHz) |
| 111 | VP-OUT HI | — | | — |

Appendix 3; Compression-BLK Phase

| V-Frequency | Phase-1 (start phase) * | Phase-2 (stop phase) |
|-------------|-------------------------|-------------------------------|
| 000 | 1088 H~1116 H | 50~78 H (0000: C-BLK2 OFF) |
| 001 | 720 H~748 H | |
| 010 | 592 H~620 H | |
| 011 | 528 H~556 H | |
| 100 | 488 H~516 H | |
| 101 | 280 H~308 H | |
| 110 | 224 H~252 H | |
| 111 | C-BLK OFF | |

*: C-BLK1 = 1111: C-BLK1 OFF

Appendix 4; P-Mode

| 05-D7 | 1A-D1 | 1A-D0 | MODE | Description |
|-------|-------|-------|------------------|---|
| 0 | 0 | 0 | NORMAL 1 | P-Mute and halftone the main signal by pin Y _M . Insert analog RGB-IN by Ys3, and OSD-IN by Ys1/Ys2. Analog RGB-IN > P-Mute |
| 0 | 0 | 1 | Y-MUTE | Full-screen-mute process is executed on Y of main signal by BUS. Insert analog RGB-IN by Ys3, and OSD-IN by Ys1/Ys2. Analog RGB-IN > P-Mute |
| 0 | 1 | 0 | Y _M 1 | Full-screen-halftone process is executed on main signal by BUS. Insert P-Mute by pin Y _M , and analog RGB-IN by Ys3. Ys1/Ys2 blends OSD-IN and main halftone signal. Analog RGB-IN > P-Mute |
| 0 | 1 | 1 | BB | Blue background process is executed on main signal by BUS. Insert P-Mute by pin Y _M , analog RGB-IN by Ys3, and OSD-IN by Ys1/Ys2 Analog RGB-IN > P-Mute |
| 1 | 0 | 0 | P-MUTE 1 | Full-screen-mute process is executed on main signal by BUS. Insert analog RGB-IN by Ys3, and OSD-IN by Ys1/Ys2. Analog RGB-IN > P-Mute |
| 1 | 0 | 1 | Y _M 2 | Full-screen-halftone process is executed on main signal by BUS. Insert P-Mute by pin Y _M , and analog RGB-IN by Ys3. Ys1/Ys2 blends OSD-IN and main halftone signal P-Mute > Analog RGB-IN |
| 1 | 1 | 0 | P-MUTE 2 | Full-screen-mute process is executed on main signal and analog RGB-IN by BUS. Insert OSD-IN by Ys1/Ys2. P-Mute > Analog RGB-IN |
| 1 | 1 | 1 | NORMAL 2 | P-Mute and halftone process is executed on the main signal by pin Y _M . Analog RGB-IN is inserted by Ys3, and OSD-IN by Ys1/Ys2. P-Mute > Analog RGB-IN |

Output priority; (000)~(100): Main signal < BB < P-MUTE < RGB-IN < OSD-IN
(101)~(111): Main signal < BB < RGB-IN < P-MUTE < OSD-IN

Appendix 5; DR-R, DR-B/G

| DR-R | DR-B/G | Reference Axis | Drive Gain1 | Drive Gain2 |
|------|--------|----------------|-------------|-------------|
| 0 | 0 | R | G | B |
| 0 | 1 | R | G | B |
| 1 | 0 | G | R | B |
| 1 | 1 | B | G | R |

Read Function


| Signal | Function |
|---------|--|
| POR | Power-on reset: 0: RESISTER PRESET 1: Normal After power on, 0 is returned at first read; 1, at second and subsequent reads. |
| IK-IN | Detects IK input; detects input through pin 45. 0: NG (no signal) 1: OK (signal detected) |
| RGB-OUT | Detects RGB-OUT self-check; detects output of pins 41, 42, 43. 0: NG (no signal) 1: OK (signal detected) Detects signal when all three outputs hsvc signals. Small signals are not detected. |
| YUV-IN | Detects YUV-IN self-check; detects input of pins 3, 4, 5 or pins 8, 9, 10. 0: NG (no signal) 1: OK (signal detected) Detects signal when all three inputs are AC signals. Small signals or signals like DC voltage are not detected. |
| H-OUT | Detects H-OUT self-check; detects output of pin 26. 0: NG (no signal) 1: OK (signal detected) |
| VP-OUT | Detects VP-OUT self-check; detects output of pin 27. 0: NG (no signal) 1: OK (signal detected) |
| RGB-IN | Detects RGB-IN self-check; detects input of pins 33, 34, 35. 0: NG (no signal) 1: OK (signal detected) Detects signal when all three inputs are AC signals. Small signals or signals like DC voltage are not detected. |
| SYNC-IN | Detects SYNC-IN self-check; detects input of pin 14. 0: NG (no signal), 1: OK (signal detected) |

How to Transmit/Receive Via I²C Bus


Slave Address: 88H

| A6 | A5 | A4 | A3 | A2 | A1 | A0 | W/R |
|----|----|----|----|----|----|----|-----|
| 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0/1 |


Start and Stop Conditions

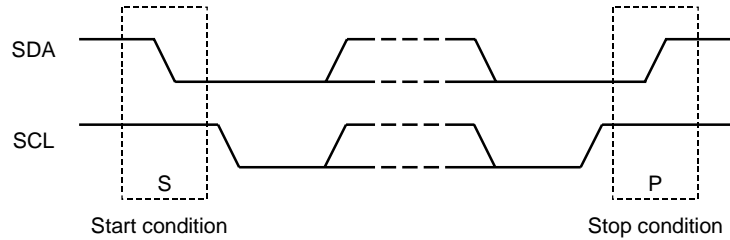


Bit Transfer

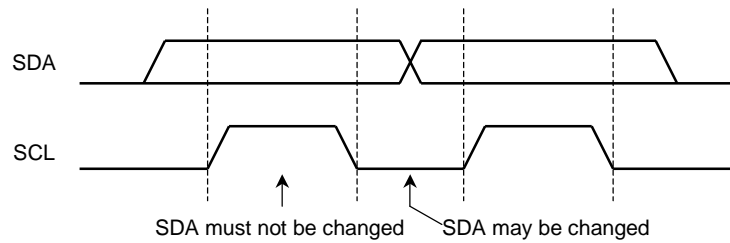


Acknowledgement

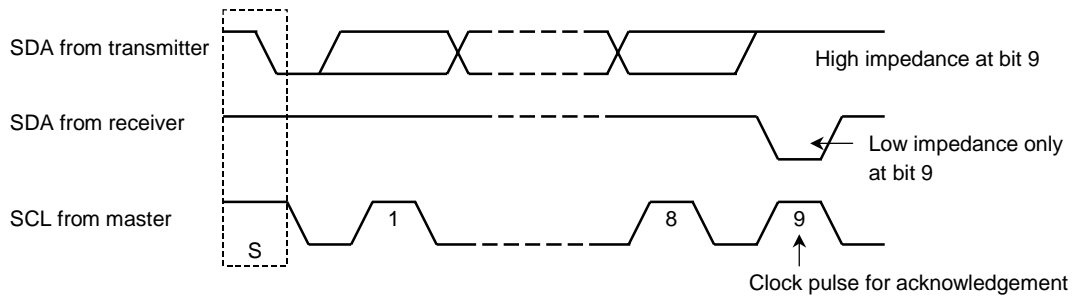


Data Transmit Format 1

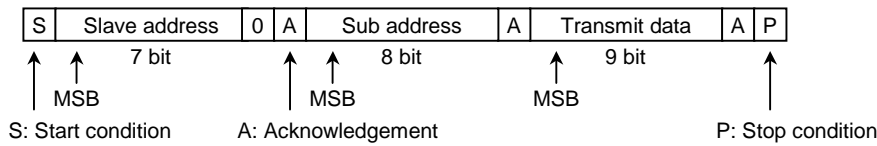

Data Transmit Format 2

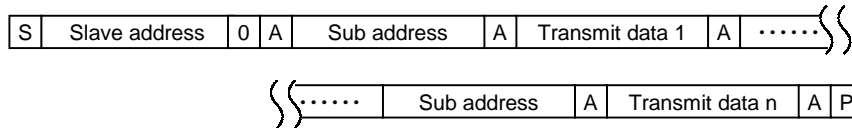


Data Receive Format



To receive data, the master transmitter changes to the receiver immediately after the first acknowledgement. The slave receiver changes to the transmitter. The stop condition is always created by the master. Details are provided in the Philips I²C specifications.

Optional Data Transmit Format



In this way, sub addresses are automatically incremented from the specified sub address and data are set. Purchase of TOSHIBA I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

Maximum Ratings (Ta = 25°C)

| Characteristics | Symbol | Rating | | | Unit |
|---|-------------------------|------------|------------|------------|------------------|
| | | PCB A | PCB B | PCB C | |
| Supply voltage | V _{CCmax} | 12 | 12 | 12 | V |
| Input pin signal voltage | e _{inmax} | 9 | 9 | 9 | V _{p-p} |
| Power dissipation | P _D (Note 3) | 2551 | 2717 | 3378 | mW |
| Power dissipation reduction rate depending on temperature | 1/θ _{ja} | 20.4 | 21.7 | 27.0 | mW/°C |
| Operating temperature | T _{opr} | -20 to 65 | -20 to 65 | -20 to 65 | °C |
| Storage temperature | T _{stg} | -55 to 150 | -55 to 150 | -55 to 150 | °C |
| Supply voltage (pins 19, 40, and 55) | min | 8.5 | 8.7 | 8.7 | V |
| | typ. | 8.8 | 9.0 | 9.0 | |
| | max | 9.1 | 9.3 | 9.3 | |

Note 3: See the following Figure A.

Note, however, that the conditions apply only to the case where the device is mounted on board A (180 mm × 125 mm × 1.6 mm, one-sided); board B (329 mm × 249 mm × 1.6 mm, two-sided); or board C (276 mm × 192 mm × 1.6 mm, six-layered). When mounting the IC, select boards no smaller than these. When using under the conditions of board A, set the IC's power supply voltage (pins 19, 40, 55) to 8.8 V (±0.3 V). Because the IC's thermal capacity margin is narrow, when designing a set, incorporate heat discharge features into the design. Note that the power dissipation varies widely depending on the board mounting conditions.

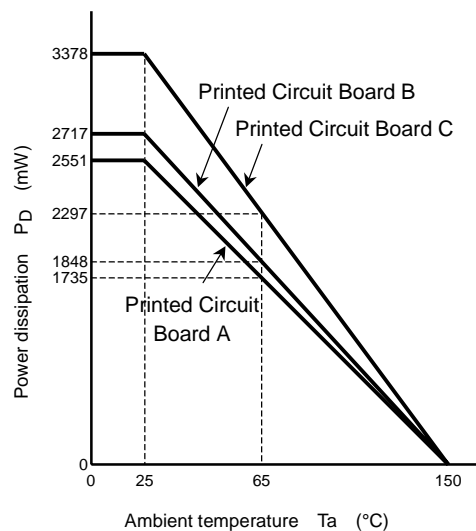


Figure A Power Dissipation Reduction Curve

Note 4: Power supply sequence

At power-on, power should be supplied to the power supply pins according to the following sequence:

1. Pin 29 ($I^2L V_{DD}$)
2. Pin 19 (DEF/DAC V_{CC})
3. Pins 40 and 55 (RGB $V_{CC}/YC V_{CC}$)

Supply power to pin 29 via zener diode through resistor from pin 19. (See "Application Circuit".)

BUS preset value is become undefined and caused malfunction of the IC unless supplying power to all supply pins or follow the power supply sequence described above. When the frequency of horizontal output (pin 26) became undefined, horizontal transistor may be damaged. When the TA1360N is used for CRT, control horizontal oscillation frequency by pins 13 and 22.

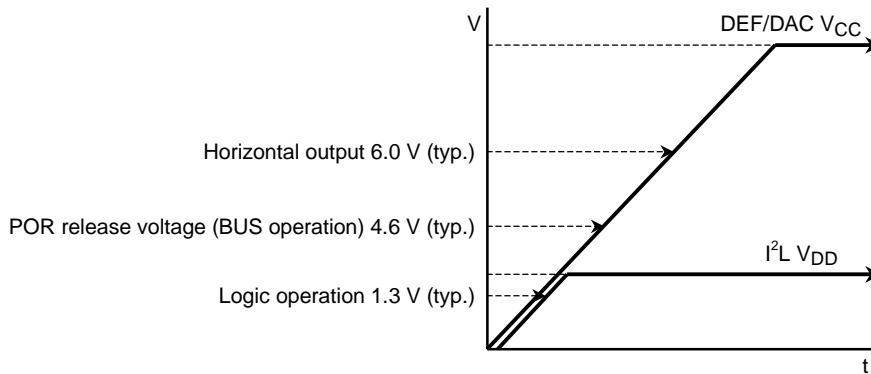


Figure B Timing chart that indicates the timing from power-on till horizontal output. (At $T_a = 25\text{ C}^\circ$)

Operating Conditions

| Characteristics | Description | | Min | Typ. | Max | Unit |
|--|---|--------------------------|------|-----------------|-----------------|------------------|
| Supply voltage (V _{CC}) | Pins 19, 40, 55 | Board A (Note 5) | 8.5 | 8.8 | 9.1 | V |
| | | Boards B and C (Note 5) | 8.7 | 9.0 | 9.3 | |
| | Pin 29 | | 1.8 | 2.0 | 2.2 | |
| Y input level | Pins 3, 8: 100% color bar, including sync (Picture period amplitude, 0.7 V _{p-p}) | | — | 1.0 | — | V _{p-p} |
| Color-difference input level | Pins 4, 5 9, 10: 100% color bar, not including sync | | — | 0.7 | — | |
| HD/VD input level | Pins 15, 16 | | 2.0 | 5.0 | V _{CC} | V |
| SYNC input level | Pin 14: 100% color bar, including sync | | 0.9 | 1.0 | 1.1 | V _{p-p} |
| SCP input level | Pin 17 | CP | 4.2 | 5.0 | V _{CC} | V |
| | | BPP | 2.2 | 2.5 | 2.8 | |
| Horizontal frequency switching voltage | Pin 13 | At 28 k/31 k/33 k/37 kHz | 0 | 0 | 1.0 | |
| | | At 15 k/31 k/33 k/45 kHz | 8.0 | V _{CC} | V _{CC} | |
| | Pin 22 | 28.125 kHz or 15.75 kHz | 8.0 | V _{CC} | V _{CC} | |
| | | 31.5 kHz | 5.0 | 6.0 | 7.0 | |
| | | 33.75 kHz | 2.0 | 3.0 | 4.0 | |
| FBP input level | Pin 24 | H-AFC | 6.5 | 7.0 | V _{CC} | |
| | | H-BLK | 3.0 | 3.5 | 4.0 | |
| FBP input width | Pin 24 | | 0.16 | — | 0.3 | |
| H-OUT input current | Pin 26 | | — | 9.0 | 15.0 | mA |
| DAC input current | Pins 28, 36 | | — | 0.3 | 1.0 | |
| SCL/SDA pull-up voltage | Pins 30, 31 | | 3.3 | 5.0 | V _{CC} | V |
| SDA input current | Pin 31 | | — | — | 2 | mA |
| Analog RGB input level | Pins 33, 34, 35: White 100% | | — | 0.7 | — | V _{p-p} |
| Analog OSD input level | Pins 37, 38, 39: White 100% | | — | 0.7 | — | |
| Y _{S3} switching voltage | Pin 49 | | 1.5 | 5.0 | V _{CC} | V |
| Y _{S1/2} switching voltage | Pins 51, 50 | OSD | 2.9 | 5.0 | V _{CC} | |
| | | VSM MUTE | 1.1 | 1.5 | 1.7 | |
| Y _M switching voltage | Pin 52 | BLK | 7.0 | V _{CC} | V _{CC} | |
| | | P-MUTE | 2.7 | 3.5 | 4.0 | |
| | | HALF TONE | 1.2 | 1.5 | 1.8 | |
| External V-BLK input current | Pin 27 | | 0.78 | — | 1 | mA |

Note 5: See "Maximum Ratings" about the boards A, B, and C.

Electrical Characteristics (unless otherwise specified, V_{CC} = 9 V/2 V, Ta = 25°C)

Current Dissipation

| Pin Name | Symbol | Test Circuit | Min | Typ. | Max | Unit |
|--|------------------|--------------|------|------|------|------|
| DEF/DAC V _{CC} (9 V) | I _{CC1} | — | 19.2 | 24.0 | 28.2 | mA |
| RGB V _{CC} (9 V) | I _{CC2} | — | 48.8 | 61.0 | 67.8 | |
| I ² L V _{DD} (2 V) | I _{CC3} | — | 21.3 | 25.0 | 29.4 | |
| Y/C V _{CC} (9 V) | I _{CC4} | — | 36.8 | 46.0 | 51.1 | |

Pin Voltage

Test Condition

- (1) BUS = Preset
- (2) SW1 = B, SW2 = B, SW3 = C, SW4 = B, SW5 = B, SW7 = B, SW8~10 = B, SW14 = B, SW20 = ON, SW23 = B, SW24 = A, SW26 = A, SW33~35 = A, SW37 to 39 = A, SW54 = OFF, SW56 = ON

| Pin No. | Pin Name | Symbol | Test Circuit | Min | Typ. | Max | Unit |
|---------|-----------------------|-----------------|--------------|------|------|------|------|
| 1 | DARK AREA DET FILTER | V ₁ | — | — | 0.09 | 0.15 | V |
| 2 | BPH FILTER | V ₂ | — | 5.5 | 5.8 | 6.1 | |
| 3 | Y1 IN | V ₃ | — | 4.7 | 5.0 | 5.3 | |
| 4 | Cb/Pb1 IN | V ₄ | — | 4.7 | 5.0 | 5.3 | |
| 5 | Cr/Pr1 IN | V ₅ | — | 4.7 | 5.0 | 5.3 | |
| 7 | LIGHT AREA DET FILTER | V ₇ | — | — | 0.09 | 0.15 | |
| 8 | Y2 IN | V ₈ | — | 4.7 | 5.0 | 5.3 | |
| 9 | Cb/Pb2 IN | V ₉ | — | 4.7 | 5.0 | 5.3 | |
| 10 | Cr/Pr2 IN | V ₁₀ | — | 4.7 | 5.0 | 5.3 | |
| 11 | COLOR LIMITER | V ₁₁ | — | 6.65 | 6.9 | 7.15 | |
| 12 | VSM FILTER | V ₁₂ | — | 7.5 | 7.7 | 7.9 | |
| 14 | SYNC IN | V ₁₄ | — | 1.8 | 2.1 | 2.4 | |
| 15 | VD IN | V ₁₅ | — | — | 0 | 0.3 | |
| 16 | HD IN | V ₁₆ | — | — | 0 | 0.3 | |
| 17 | CP IN | V ₁₇ | — | — | 0 | 0.3 | |
| 20 | AFC FILTER | V ₂₀ | — | 5.4 | 6.2 | 7.0 | |
| 21 | HVCO | V ₂₁ | — | 4.4 | 5.0 | 5.6 | |
| 23 | H CURVE CORRECTION | V ₂₃ | — | 2.2 | 2.5 | 2.8 | |
| 33 | ANALOG B IN | V ₃₃ | — | 3.65 | 3.95 | 4.25 | |
| 34 | ANALOG G IN | V ₃₄ | — | 3.65 | 3.95 | 4.25 | |
| 35 | ANALOG R IN | V ₃₅ | — | 3.65 | 3.95 | 4.25 | |
| 37 | ANALOG OSD B IN | V ₃₇ | — | 3.65 | 3.95 | 4.25 | |
| 38 | ANALOG OSD G IN | V ₃₈ | — | 3.65 | 3.95 | 4.25 | |
| 39 | ANALOG OSD R IN | V ₃₉ | — | 3.65 | 3.95 | 4.25 | |
| 46 | B S/H | V ₄₆ | — | 4.2 | 5.2 | 6.2 | |
| 47 | G S/H | V ₄₇ | — | 4.2 | 5.2 | 6.2 | |
| 48 | R S/H | V ₄₈ | — | 4.2 | 5.2 | 6.2 | |
| 49 | Y _{S3} | V ₄₉ | — | — | 0.1 | 0.2 | |
| 50 | Y _{S2} | V ₅₀ | — | — | 0.1 | 0.2 | |
| 51 | Y _{S1} | V ₅₁ | — | — | 0.1 | 0.2 | |
| 52 | Y _M | V ₅₂ | — | — | 0.1 | 0.2 | |
| 53 | ABCL IN | V ₅₃ | — | 6.1 | 6.35 | 6.6 | |
| 54 | VSM OUT | V ₅₄ | — | 4.1 | 4.3 | 4.5 | |
| 56 | APL FILTER | V ₅₆ | — | 4.8 | 5.0 | 5.2 | |

Picture Quality (Sharpness) Block

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|--|---------------------|--------------|----------------|------|------|------|-------|
| Y input dynamic range | D _{RY} | — | — | 0.7 | 1.0 | 1.5 | Vp-p |
| Black detection level shift | V _B | — | (Note P01) | -15 | 10 | 15 | mV |
| | V _{B3} | — | | 35 | 45 | 55 | |
| Black stretch amp maximum gain | G _{BS} | — | (Note P02) | 2.4 | 2.8 | 3.2 | dB |
| Black stretch start point 1 | P _{BST1} | — | (Note P03) | 20 | 25 | 35 | IRE |
| | P _{BST2} | — | | 50 | 55 | 60 | |
| Black stretch start point 2 | P _{BS1} | — | (Note P04) | 0 | 5 | 10 | IRE |
| | P _{BS2} | — | | 14 | 21 | 30 | |
| Black stretch characteristic switch | P _{BSC1} | — | (Note P05) | 26 | 28 | 30 | IRE |
| | P _{BSC2} | — | | -8 | -6 | -4 | |
| | P _{BSC3} | — | | 26 | 28 | 30 | |
| | P _{BSC4} | — | | -5.5 | -3 | -1 | |
| | P _{BSC5} | — | | 26 | 28 | 30 | |
| | P _{BSC6} | — | | -3.5 | -2 | -0.5 | |
| Black stretch area reinforcement current | IBSA | — | (Note P06) | 13 | 18 | 23 | μA |
| D.ABL detection voltage | DV ₀₁ | — | (Note P07) | 80 | 120 | 160 | mV |
| | DV ₁₀ | — | | 240 | 280 | 320 | |
| | DV ₁₁ | — | | 380 | 420 | 460 | |
| D.ABL sensitivity | S _{DAMIN} | — | (Note P08) | — | 0.01 | 0.02 | V/V |
| | S _{DAMAX} | — | | 0.25 | 0.28 | 0.31 | |
| Black level correction | BLC | — | (Note P09) | 4.5 | 6.5 | 8.5 | IRE |
| Dark area Y _γ correction point | P _{DGP} | — | (Note P10) | 25 | 28 | 33 | IRE |
| Dark area dynamic Y _γ gain | G _{DDGMAX} | — | (Note P11) | 5.5 | 6 | 6.5 | dB |
| Dark area static Y _γ gain | G _{DSGMIN} | — | (Note P12) | -6.5 | -5 | -4 | dB |
| | G _{DSGMAX} | — | | 2 | 2.4 | 2.6 | |
| Light area Y _γ correction point | LPG | — | (Note P13) | 64 | 74 | 80 | IRE |
| Light area dynamic Y _γ gain | GLDG | — | (Note P14) | 1.1 | 1.7 | 2.3 | dB |
| Light area static Y _γ gain | GLSGMIN | — | (Note P15) | 0.3 | 0.6 | 0.9 | dB |
| | GLSGMAX | — | | 1.4 | 1.7 | 2.3 | |
| Dark area detection sensitivity | D _{AMIN} | — | (Note P16) | 0.25 | 0.3 | 0.37 | V |
| | D _{ACEN} | — | | 0.88 | 0.98 | 1.08 | |
| | D _{AMAX} | — | | 0.95 | 1.05 | 1.15 | |
| DC restoration rate | ADT ₁₀₀ | — | (Note P17) | 0.9 | 1.1 | 1.2 | times |
| | ADT ₁₃₅ | — | | 1.2 | 1.35 | 1.5 | |
| | ADT ₆₅ | — | | 0.55 | 0.70 | 0.85 | |
| DC restoration point | V _{DT0} | — | (Note P18) | -5 | 0 | 5 | % |
| | V _{DT1} | — | | 47 | 49 | 55 | |
| DC restoration limit | P _{DTL60} | — | (Note P19) | 64 | 67 | 70 | % |
| | P _{DTL75} | — | | 74 | 77 | 80 | |
| | P _{DTL87} | — | | 74 | 80 | 82 | |
| | P _{DTL100} | — | | 74 | 80 | 82 | |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|--|--------|--------------|-----------------|------|------|------|------|
| Sharpness control peak frequency | FAP00 | — | — | 10.5 | 13.5 | 17 | MHz |
| | FAP01 | — | | 7 | 9.5 | 12 | |
| | FAP10 | — | | 5 | 7.2 | 7.8 | |
| | FAP11 | — | | 3.5 | 4.5 | 6.3 | |
| DC fluctuation at switching sharpness control peak frequency | VRDC | — | (Note P20) | — | 0.01 | 0.02 | V |
| Sharpness control range | GMAX00 | — | (Note P21) | 15 | 17.5 | 19 | dB |
| | GMIN00 | — | | -4 | -0.6 | 2.5 | |
| | GMAX01 | — | | 15 | 17.5 | 19 | |
| | GMIN01 | — | | -5 | -0.3 | 2.5 | |
| | GMAX10 | — | | 15 | 17.5 | 19 | |
| | GMIN10 | — | | -7 | -2.5 | 1.5 | |
| | GMAX11 | — | | 15 | 17.5 | 19 | |
| | GMIN11 | — | | -12 | -5 | 0 | |
| Sharpness control center characteristic | GCEN00 | — | (Note P22) | 7 | 10 | 13 | dB |
| | GCEN01 | — | | 7 | 10 | 13 | |
| | GCEN10 | — | | 7 | 10 | 13 | |
| | GCEN11 | — | | 7 | 10 | 13 | |
| 2T pulse response SRT control | TSRT00 | — | (Note P23) | 0.9 | 1.6 | 2.7 | dB |
| | TSRT01 | — | | 3.5 | 4.8 | 7.1 | |
| | TSRT10 | — | | 6.7 | 8.5 | 11.3 | |
| | TSRT11 | — | | 11.5 | 12.5 | 15.5 | |
| VSM peak frequency | FVSM | — | — | 19 | 19.5 | 25.5 | MHz |
| VSM gain | GV000 | — | (Note P24) | — | -40 | -35 | dB |
| | GV001 | — | | -2 | -1.2 | -0.4 | |
| | GV010 | — | | 3.7 | 4.6 | 5.5 | |
| | GV011 | — | | 7.1 | 8.2 | 9.3 | |
| | GV100 | — | | 8.9 | 10.5 | 12.1 | |
| | GV101 | — | | 11.4 | 12.6 | 13.8 | |
| | GV110 | — | | 13.5 | 14.4 | 15.3 | |
| | GV111 | — | | 14.8 | 15.7 | 16.6 | |
| VSM mute threshold voltage | VSR49 | — | Pins 49, 50, 51 | 0.62 | 0.78 | 0.85 | V |
| | VSR50 | — | | 0.62 | 0.78 | 0.85 | |
| | VSR51 | — | | 0.62 | 0.78 | 0.85 | |
| VSM limit | VLU | — | (Note P25) | 0.55 | 0.66 | 0.75 | Vp-p |
| | VLD | — | | 0.55 | 0.66 | 0.75 | |
| Y input to R output delay time | TYR | — | — | 110 | 125 | 145 | ns |
| Y delay time switch | YDLA | — | (Note P26) | 3 | 5 | 10 | ns |
| | YDLB | — | | 7 | 10 | 15 | |
| | YDLC | — | | 10 | 15 | 25 | |
| Y group delay correction | GAMIN | — | (Note P27) | -4 | -2.5 | -1 | dB |
| | GBMIN | — | | 2.5 | 3 | 3.5 | |
| | GAMAX | — | | 1 | 1.7 | 2.4 | |
| | GBMAX | — | | -5 | -4 | -2 | |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|------------------------|---------------------|--------------|----------------|-----|------|-----|------|
| Color detail enhancer | G _{CDE00} | — | (Note P28) | 9 | 10 | 11 | dB |
| | G _{CDE01} | — | | 9 | 10 | 11 | |
| | G _{CDE10} | — | | 9 | 10 | 11 | |
| | G _{CDE11} | — | | 9 | 10 | 11 | |
| Y detail frequency | F _{YD} | — | — | 4 | 5 | 6 | MHz |
| Y detail control range | G _{YD} MAX | — | (Note P29) | 11 | 13 | 15 | dB |
| | G _{YD} CEN | — | | 8 | 10 | 12 | |
| | G _{YD} MIN | — | | 3 | 5 | 7 | |

Color Difference Block 1: YUV input and matrix

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|--|--|--------------|----------------|-------|-------|-------|------|
| Color difference input dynamic range | D _{RB} | — | — | 0.7 | 0.9 | 1.0 | Vp-p |
| | D _{RR} | — | | 0.7 | 0.9 | 1.0 | |
| Color difference tint control characteristic | T _{RMAX} | — | — | 25 | 29 | 33 | ° |
| | T _{RMIN} | — | | -37 | -33 | -29 | |
| | T _{BMAX} | — | | 27 | 31 | 35 | |
| | T _{BMIN} | — | | -36 | -32 | -28 | |
| Color SRT peak frequency | F _{B00} | — | — | 3.6 | 4.5 | 5.4 | MHz |
| | F _{B01} | — | | 4.6 | 5.8 | 7.0 | |
| | F _{R00} | — | | 3.6 | 4.5 | 5.4 | |
| | F _{R01} | — | | 4.6 | 5.8 | 7.0 | |
| Color SRT gain | G _{S_{B00}CEN} | — | (Note S01) | 1.5 | 2.8 | 4.1 | dB |
| | G _{S_{B00}MAX} | — | | 2.9 | 4.2 | 5.5 | |
| | G _{S_{B01}CEN} | — | | 2.0 | 3.3 | 4.6 | |
| | G _{S_{B01}MAX} | — | | 3.5 | 4.8 | 6.1 | |
| | G _{S_{R00}CEN} | — | | 3.4 | 4.7 | 6.0 | |
| | G _{S_{R00}MAX} | — | | 5.4 | 6.7 | 7.0 | |
| | G _{S_{R01}CEN} | — | | 3.1 | 4.4 | 5.7 | |
| | G _{S_{R01}MAX} | — | | 5.2 | 6.5 | 7.8 | |
| Cb1 input to B output delay time | T _B | — | — | 130 | 155 | 185 | ns |
| Cr1 input to R output delay time | T _R | — | — | 130 | 155 | 185 | ns |
| Dynamic Y/C compensation | G _{CBDY1} | — | (Note S02) | 1.8 | 2.25 | 2.7 | dB |
| | G _{CBDY2} | — | | -1.65 | -1.2 | -0.75 | |
| | G _{CRDY1} | — | | 1.8 | 2.25 | 2.7 | |
| | G _{CRDY2} | — | | -1.65 | -1.2 | -0.75 | |
| YUV gain | G _{Y00} | — | (Note S03) | 2.4 | 3.4 | 4.4 | dB |
| | G _{Y01} | — | | 2.4 | 3.4 | 4.4 | |
| | G _{CB_B} | — | | 9.5 | 11.0 | 12.5 | |
| | G _{P_{B_B}} | — | | 9.9 | 11.4 | 12.9 | |
| | G _{P_{B_R}} | — | | -18.0 | -16.0 | -14.0 | |
| | G _{C_{R_R}} | — | | 9.5 | 11.0 | 12.5 | |
| | G _{P_{R_B}} | — | | -15.0 | -13.5 | -12.0 | |
| | G _{P_{R_R}} | — | | 10.0 | 11.5 | 13.0 | |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|-----------------|--------|--------------|----------------|------|------|------|-------|
| Green stretch | GrA01 | — | (Note S04) | 0.98 | 1 | 1.02 | times |
| | GrA10 | — | | 0.95 | 1 | 1.05 | |
| | GrA11 | — | | 0.93 | 1 | 1.07 | |
| | GrB01 | — | | 1.01 | 1.05 | 1.10 | |
| | GrB10 | — | | 1.05 | 1.1 | 1.15 | |
| | GrB11 | — | | 1.12 | 1.19 | 1.26 | |
| | GrC01 | — | | 1.10 | 1.14 | 1.18 | |
| | GrC10 | — | | 1.23 | 1.27 | 1.31 | |
| | GrC11 | — | | 1.35 | 1.42 | 1.49 | |
| | GrD01 | — | | 1.09 | 1.13 | 1.17 | |
| | GrD10 | — | | 1.21 | 1.25 | 1.29 | |
| | GrD11 | — | | 1.32 | 1.39 | 1.46 | |
| | GrE01 | — | | 0.98 | 1 | 1.02 | |
| | GrE10 | — | | 0.95 | 1 | 1.05 | |
| | GrE11 | — | | 0.93 | 1 | 1.07 | |

Color Difference Block 2

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|---|-------------------|--------------|----------------|------|-------|-------|-------|
| Color difference contrast adjustment characteristic | ΔV_{UCY} | — | (Note A01) | 14.5 | 16.0 | 17.5 | dB |
| Color adjustment characteristic | Δv_{cCY+} | — | (Note A02) | 3.0 | 4.0 | 5.0 | dB |
| | Δv_{cCY-} | — | | -35 | -22 | -17 | |
| R-Y relative phase and amplitude | θ_{RMAX} | — | — | 109 | 111.5 | 114 | ° |
| | θ_{RCNT} | — | | 98.5 | 101 | 103.5 | |
| | θ_{RMIN} | — | | 88 | 90 | 92 | |
| | V_R/V_{BMAX} | — | | 0.86 | 0.90 | 0.94 | times |
| | V_R/V_{BCNT} | — | | 0.65 | 0.69 | 0.73 | |
| | V_R/V_{BMIN} | — | | 0.42 | 0.45 | 0.49 | |
| G-Y relative phase and amplitude | θ_{GMAX} | — | — | 251 | 254 | 257 | ° |
| | θ_{GCNT} | — | | 244 | 247 | 250 | |
| | θ_{GMIN} | — | | 229 | 232 | 235 | |
| | V_G/V_{BMAX} | — | | 0.43 | 0.48 | 0.53 | times |
| | V_G/V_{BCNT} | — | | 0.33 | 0.37 | 0.41 | |
| | V_G/V_{BMIN} | — | | 0.22 | 0.25 | 0.28 | |
| Color difference halftone characteristic | GHT_{RY} | — | (Note A03) | 0.47 | 0.50 | 0.53 | times |
| | GHT_{GY} | — | | 0.47 | 0.50 | 0.53 | |
| | GHT_{BY} | — | | 0.47 | 0.50 | 0.53 | |
| Color γ characteristic | $V_{\gamma 1}$ | — | (Note A04) | 0.09 | 0.23 | 0.37 | Vp-p |
| | $V_{\gamma 2}$ | — | | 0.26 | 0.40 | 0.54 | |
| | $V_{\gamma 3}$ | — | | 0.44 | 0.58 | 0.72 | |
| | $\Delta\gamma$ | — | | 0.60 | 0.70 | 0.80 | — |
| Color limiter characteristic | CLT_0 | — | (Note A05) | 1.45 | 1.65 | 1.85 | Vp-p |
| | CLT_1 | — | | 1.80 | 2.00 | 2.20 | |
| High-bright color gain | HBC_1 | — | (Note A06) | 0.02 | 0.04 | 0.06 | times |

Text Block

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|--|--------------------|--------------|---|------|------|------|-------|
| AC gain (Y1in~R/G/B out) | G _R | — | (Note T01) | 3.08 | 3.45 | 3.90 | times |
| | G _G | — | | 3.08 | 3.45 | 3.90 | |
| | G _B | — | | 3.08 | 3.45 | 3.90 | |
| AC gain axis difference | G _{G/R} | — | — | 0.94 | 1.00 | 1.06 | |
| | G _{B/R} | — | | 0.94 | 1.00 | 1.06 | |
| Frequency characteristic (Y1in~R/G/B out) | G _{fR} | — | At -3dB, sharpness characteristic is flat | 30 | 60 | — | MHz |
| | G _{fG} | — | | 30 | 60 | — | |
| | G _{fB} | — | | 30 | 60 | — | |
| Frequency characteristic (Cb1/Cr1in~R/G/B out) | G _{fCb} | — | — | 10 | 12.5 | — | MHz |
| | G _{fCr} | — | | 10 | 12.5 | — | |
| Unicolor adjustment characteristic | ΔV _u | — | (Note T02) | 15.0 | 16.0 | 17.0 | dB |
| Brightness adjustment characteristic | V _{brMAX} | — | (Note T03) | 4.10 | 4.45 | 4.80 | V |
| | V _{brCNT} | — | | 3.05 | 3.40 | 3.75 | |
| | V _{brMIN} | — | | 1.95 | 2.30 | 2.65 | |
| White peak slice level | V _{wps1} | — | (Note T04) | 2.20 | 2.32 | 2.44 | Vp-p |
| | V _{wps2} | — | | 2.59 | 2.74 | 2.89 | |
| Black peak slice level | V _{bps} | — | (Note T05) | 1.15 | 1.35 | 1.45 | V |
| RGB output S/N | N ₄₁ | — | (Note T06) | — | -52 | -46 | dB |
| | N ₄₂ | — | | — | -52 | -46 | |
| | N ₄₃ | — | | — | -52 | -46 | |
| Halftone characteristic | G _{HT1} | — | (Note T07) | 0.45 | 0.50 | 0.55 | times |
| | G _{HT2} | — | | 0.45 | 0.50 | 0.55 | |
| Halftone on voltage | V _{HT} | — | Pin 52 | 0.65 | 0.85 | 1.05 | V |
| V-BLK pulse output level | V _{VR} | — | — | 0.30 | 0.80 | 1.30 | V |
| | V _{VG} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{VB} | — | | 0.30 | 0.80 | 1.30 | |
| H-BLK pulse output level | V _{HR} | — | — | 0.30 | 0.80 | 1.30 | V |
| | V _{HG} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{HB} | — | | 0.30 | 0.80 | 1.30 | |
| BLK pulse delay time | td _{ON} | — | (Note T08) | — | 0.00 | 0.30 | μs |
| | td _{OFF} | — | | — | 0.08 | 0.30 | |
| Sub-contrast variable range | ΔV _{su+} | — | — | 1.95 | 2.45 | 2.95 | dB |
| | ΔV _{su-} | — | | -3.8 | -3.3 | -2.8 | |
| Cut-off voltage variable range | CUT+ | — | — | 0.42 | 0.47 | 0.52 | V |
| | CUT- | — | | 0.42 | 0.47 | 0.52 | |
| RGB output voltage | ΔV _{#41} | — | — | 2.05 | 2.30 | 2.55 | V |
| | ΔV _{#42} | — | | 2.05 | 2.30 | 2.55 | |
| | ΔV _{#43} | — | | 2.05 | 2.30 | 2.55 | |
| RGB output voltage 3-axis difference | ΔV _{OUT} | — | — | — | 0 | 150 | mV |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|-----------------------------------|-------------------|--------------|----------------|-------|-------|-------|------------------|
| Drive adjustment variable range | DR _{R1+} | — | (Note T09) | 2.5 | 3.0 | 3.5 | dB |
| | DR _{R1-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{R2+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{R2-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{G1+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{G1-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{G2+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{G2-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{G3+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{G3-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{B1+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{B1-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{B2+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{B2-} | — | | -5.5 | -5.0 | -4.5 | |
| | DR _{B3+} | — | | 2.5 | 3.0 | 3.5 | |
| | DR _{B3-} | — | | -5.5 | -5.0 | -4.5 | |
| Output voltage at P-mute | MURD | — | — | 1.7 | 1.85 | 2.0 | V |
| | MUGD | — | | 1.7 | 1.85 | 2.0 | |
| | MUBD | — | | 1.7 | 1.85 | 2.0 | |
| P-mute ON voltage | V _{MUTE} | — | Pin 52 | 1.90 | 2.15 | 2.40 | V |
| Output voltage at blue background | BB _R | — | — | 1.0 | 1.2 | 1.4 | V |
| | BB _G | — | | 1.0 | 1.2 | 1.4 | |
| | BB _B | — | | 1.1 | 1.25 | 1.4 | V _{p-p} |
| Input impedance of #53 | Z _{in} | — | (Note T10) | 24 | 30 | 36 | kΩ |
| ACL characteristic | ACL ₁ | — | (Note T11) | -6.5 | -4.5 | -2.5 | dB |
| | ACL ₂ | — | | -15.0 | -13.5 | -11.0 | |
| ABL point | ABL _{P1} | — | (Note T12) | -0.21 | -0.16 | -0.11 | V |
| | ABL _{P2} | — | | -0.28 | -0.23 | -0.18 | |
| | ABL _{P3} | — | | -0.37 | -0.32 | -0.27 | |
| | ABL _{P4} | — | | -0.45 | -0.40 | -0.35 | |
| | ABL _{P5} | — | | -0.54 | -0.49 | -0.44 | |
| | ABL _{P6} | — | | -0.62 | -0.57 | -0.52 | |
| | ABL _{P7} | — | | -0.70 | -0.65 | -0.60 | |
| | ABL _{P8} | — | | -0.75 | -0.70 | -0.65 | |
| ABL gain | ABL _{G1} | — | (Note T13) | -0.06 | -0.02 | 0.00 | V |
| | ABL _{G2} | — | | -0.17 | -0.12 | -0.07 | |
| | ABL _{G3} | — | | -0.34 | -0.29 | -0.24 | |
| | ABL _{G4} | — | | -0.52 | -0.47 | -0.42 | |
| | ABL _{G5} | — | | -0.68 | -0.63 | -0.59 | |
| | ABL _{G6} | — | | -0.85 | -0.80 | -0.75 | |
| | ABL _{G7} | — | | -1.01 | -0.96 | -0.91 | |
| | ABL _{G8} | — | | -1.09 | -1.04 | -0.99 | |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|---|--------------------|-----------------|----------------|-------|------------|-------|------|
| RGB output mode | V _{43R} | — | (Note T14) | 2.15 | 2.40 | 2.65 | V |
| | V _{42R} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{41R} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{43G} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{42G} | — | | 2.15 | 2.40 | 2.65 | |
| | V _{41G} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{43B} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{42B} | — | | 0.30 | 0.80 | 1.30 | |
| | V _{41B} | — | | 2.15 | 2.40 | 2.65 | |
| Y-OUT γ characteristic | γ_1 | — | (Note T15) | 56 | 66 | 76 | IRE |
| | γ_2 | — | | 72 | 82 | 92 | |
| | Δ_1 | — | | 0.49 | 1.24 | 1.99 | dB |
| | Δ_2 | — | | -1.67 | -0.92 | -0.17 | |
| | Δ_3 | — | | -4.59 | -3.84 | -3.09 | |
| White-peak blue characteristic | BS _{Pmin} | — | (Note T16) | 37 | 42 | 47 | IRE |
| | BS _{Pcnt} | — | | 72 | 77 | 82 | |
| | BS _{Pmax} | — | | 101 | 106 | 111 | |
| | BS _{Gmin} | — | | 2.1 | 3.1 | 4.1 | dB |
| | BS _{Gcnt} | — | | 6.4 | 7.4 | 8.4 | |
| | BS _{Gmax} | — | | 9 | 10 | 11 | |
| Forced BLK input threshold voltage | V _{BLKIN} | — | Pin 52 | 5.1 | 5.6 | 6.1 | V |
| ACB insertion pulse phase and amplitude | θ_{ACBR} | — | (Note T17) | — | 1 | — | H |
| | θ_{ACBG} | — | | — | 2 | — | |
| | θ_{ACBB} | — | | — | 3 | — | |
| | V _{ACB1R} | — | | 0.15 | 0.20 | 0.25 | Vp-p |
| | V _{ACB1G} | — | | 0.15 | 0.20 | 0.25 | |
| | V _{ACB1B} | — | | 0.15 | 0.20 | 0.25 | |
| | V _{ACB2R} | — | | 0.27 | 0.32 | 0.37 | |
| | V _{ACB2G} | — | | 0.27 | 0.32 | 0.37 | |
| | V _{ACB2B} | — | | 0.27 | 0.32 | 0.37 | |
| | V _{ACB3R} | — | | 0.52 | 0.57 | 0.62 | |
| | V _{ACB3G} | — | | 0.52 | 0.57 | 0.62 | |
| | V _{ACB3B} | — | | 0.52 | 0.57 | 0.62 | |
| | IK input amplitude | IK _R | | — | (Note T18) | 0.73 | |
| IK _G | | — | 0.73 | 0.93 | | 1.13 | |
| IK _B | | — | 0.73 | 0.93 | | 1.13 | |
| IK input cover range | DIK _{in+} | — | (Note T19) | 3.00 | 3.30 | 3.60 | V |
| | DIK _{in-} | — | | -0.50 | -0.30 | -0.10 | |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|---|----------------------|--------------|----------------|-------|-------|-------|-------|
| Analog RGB gain | G _{TXR} | — | (Note T20) | 3.03 | 3.40 | 3.83 | times |
| | G _{TXG} | — | | 3.03 | 3.40 | 3.83 | |
| | G _{TXB} | — | | 3.03 | 3.40 | 3.83 | |
| Analog RGB gain 3-axis difference | G _{TXG/R} | — | — | 0.94 | 1.00 | 1.06 | — |
| | G _{TXB/R} | — | | 0.94 | 1.00 | 1.06 | |
| Analog RGB frequency characteristic | G _{fTXR} | — | At -3dB | 30 | 35 | — | MHz |
| | G _{fTXG} | — | | 30 | 35 | — | |
| | G _{fTXB} | — | | 30 | 35 | — | |
| Analog RGB input dynamic range | DR ₃₅ | — | — | 0.80 | 1.20 | 1.50 | Vp-p |
| | DR ₃₄ | — | | 0.80 | 1.20 | 1.50 | |
| | DR ₃₃ | — | | 0.80 | 1.20 | 1.50 | |
| Analog RGB white peak slice level | TXV _{WPSR} | — | (Note T21) | 2.45 | 2.70 | 2.95 | Vp-p |
| | TXV _{WPSG} | — | | 2.45 | 2.70 | 2.95 | |
| | TXV _{WPSB} | — | | 2.45 | 2.70 | 2.95 | |
| Analog RGB black peak limit level | V _{BPSR} | — | (Note T22) | 1.15 | 1.30 | 1.45 | V |
| | V _{BPSG} | — | | 1.15 | 1.30 | 1.45 | |
| | V _{BPSB} | — | | 1.15 | 1.30 | 1.45 | |
| RGB contrast adjustment characteristic | ΔV _{uTXR} | — | (Note T23) | 15.5 | 16.5 | 18.5 | dB |
| | ΔV _{uTXG} | — | | 15.5 | 16.5 | 18.5 | |
| | ΔV _{uTXB} | — | | 15.5 | 16.5 | 18.5 | |
| Analog RGB bright adjustment characteristic | V _{brTXmax} | — | (Note T24) | 3.0 | 3.2 | 3.4 | V |
| | V _{brTXcnt} | — | | 2.6 | 2.8 | 3.0 | |
| | V _{brTXmin} | — | | 2.1 | 2.3 | 2.5 | |
| Analog RGB mode switching voltage | V _{TXON} | — | Pin 49 | 0.65 | 0.85 | 1.05 | V |
| Analog RGB mode switching transfer characteristic | τ _{RYS} | — | (Note T25) | — | 15 | 50 | ns |
| | t _{PRYS} | — | | — | 20 | 50 | |
| | Δt _{RYS} | — | | — | 0 | 10 | |
| | τ _{FYS} | — | | — | 10 | 50 | |
| | t _{PRYS} | — | | — | 30 | 50 | |
| | Δt _{RYS} | — | | — | 0 | 10 | |
| Text ACL characteristic | TXACL ₁ | — | (Note T26) | -6.7 | -4.7 | -2.7 | dB |
| | TXACL ₂ | — | | -16.5 | -14.5 | -12.5 | |
| Analog OSD gain | G _{OSDR} | — | (Note T27) | 2.95 | 3.30 | 3.70 | times |
| | G _{OSDG} | — | | 2.95 | 3.30 | 3.70 | |
| | G _{OSDB} | — | | 2.95 | 3.30 | 3.70 | |
| Analog OSD gain 3-axis difference | G _{OSDG/R} | — | — | 0.94 | 1.00 | 1.06 | — |
| | G _{OSDB/R} | — | | 0.94 | 1.00 | 1.06 | |
| Analog OSD frequency characteristic | G _{fOSDR} | — | At -3dB | 35 | 40 | — | MHz |
| | G _{fOSDG} | — | | 35 | 40 | — | |
| | G _{fOSDB} | — | | 35 | 40 | — | |
| Analog OSD input dynamic range | DR ₃₉ | — | — | 0.80 | 1.20 | 1.50 | Vp-p |
| | DR ₃₈ | — | | 0.80 | 1.20 | 1.50 | |
| | DR ₃₇ | — | | 0.80 | 1.20 | 1.50 | |

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|---|----------------------|--------------|----------------|-------|-------|-------|------|
| Analog OSD input white peak slice level | OSDV _{WPSR} | — | (Note T28) | 2.45 | 2.70 | 2.95 | Vp-p |
| | OSDV _{WPSG} | — | | 2.45 | 2.70 | 2.95 | |
| | OSDV _{WPSB} | — | | 2.45 | 2.70 | 2.95 | |
| Analog OSD black peak limit level | OSDV _{BPSR} | — | (Note T29) | 1.30 | 1.45 | 1.60 | V |
| | OSDV _{BPSG} | — | | 1.30 | 1.45 | 1.60 | |
| | OSDV _{BPSB} | — | | 1.30 | 1.45 | 1.60 | |
| OSD contrast adjustment characteristic | V _{UOSDR11} | — | (Note T30) | 0.58 | 0.64 | 0.71 | Vp-p |
| | V _{UOSDG11} | — | | 0.58 | 0.64 | 0.71 | |
| | V _{UOSDB11} | — | | 0.58 | 0.64 | 0.71 | |
| | V _{UOSDR10} | — | | 0.47 | 0.53 | 0.59 | |
| | V _{UOSDG10} | — | | 0.47 | 0.53 | 0.59 | |
| | V _{UOSDB10} | — | | 0.47 | 0.53 | 0.59 | |
| | V _{UOSDR01} | — | | 0.31 | 0.37 | 0.45 | |
| | V _{UOSDG01} | — | | 0.31 | 0.37 | 0.45 | |
| | V _{UOSDB01} | — | | 0.31 | 0.37 | 0.45 | |
| | V _{UOSDR00} | — | | 0.19 | 0.22 | 0.24 | |
| | V _{UOSDG00} | — | | 0.19 | 0.22 | 0.24 | |
| | V _{UOSDB00} | — | | 0.19 | 0.22 | 0.24 | |
| Analog OSD bright adjustment characteristic | V _{brOSD0} | — | (Note T31) | 2.20 | 2.40 | 2.60 | V |
| | V _{brOSD1} | — | | 2.05 | 2.25 | 2.45 | |
| | V _{brOSD2} | — | | 1.95 | 2.15 | 2.35 | |
| | V _{brOSD3} | — | | 1.80 | 2.00 | 2.20 | |
| Analog OSD mode switching voltage | V _{OSDON1} | — | Pin 51 | 2.05 | 2.30 | 2.55 | V |
| | V _{OSDON2} | — | Pin 50 | 2.05 | 2.30 | 2.55 | |
| Analog OSD mode switching transfer characteristic | τ _{RYS1} | — | (Note T32) | — | 15 | 50 | ns |
| | t _{PRYS1} | — | | — | 20 | 50 | |
| | Δt _{PRYS1} | — | | — | 0 | 10 | |
| | τ _{FYS1} | — | | — | 10 | 50 | |
| | t _{PRYS1} | — | | — | 30 | 50 | |
| | Δt _{PRYS1} | — | | — | 0 | 10 | |
| | τ _{RYS2} | — | | — | 15 | 50 | |
| | t _{PRYS2} | — | | — | 20 | 50 | |
| | Δt _{PRYS2} | — | | — | 0 | 10 | |
| | τ _{FYS2} | — | | — | 10 | 50 | |
| | t _{PRYS2} | — | | — | 30 | 50 | |
| | Δt _{PRYS2} | — | | — | 0 | 10 | |
| OSD ACL characteristic | OSDACL ₁ | — | (Note T33) | — | 0.00 | — | dB |
| | OSDACL ₂ | — | | — | 0.00 | — | |
| | OSDACL ₃ | — | | -6.7 | -4.7 | -2.7 | |
| | OSDACL ₄ | — | | -16.5 | -14.5 | -12.5 | |

| Characteristics | | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit | |
|----------------------------------|-------------------------|---------------------|--------------|--|--|-------|------|------|-----|
| OSD blending characteristic | | $\alpha 41TV_1$ | — | (Note T34) | -7 | -6 | -5 | dB | |
| | | $\alpha 42TV_1$ | — | | -7 | -6 | -5 | | |
| | | $\alpha 43TV_1$ | — | | -7 | -6 | -5 | | |
| | | $\alpha 41TV_2$ | — | | -4 | -3 | -2 | | |
| | | $\alpha 42TV_2$ | — | | -4 | -3 | -2 | | |
| | | $\alpha 43TV_2$ | — | | -4 | -3 | -2 | | |
| | | $\alpha 41TV_3$ | — | | — | -55 | -50 | | |
| | | $\alpha 42TV_3$ | — | | — | -55 | -50 | | |
| | | $\alpha 43TV_3$ | — | | — | -55 | -50 | | |
| | | $\alpha 41OSD_1$ | — | | -6.5 | -5.5 | -4.5 | | |
| | | $\alpha 42OSD_1$ | — | | -6.5 | -5.5 | -4.5 | | |
| | | $\alpha 43OSD_1$ | — | | -6.5 | -5.5 | -4.5 | | |
| | | $\alpha 41OSD_2$ | — | | -12.0 | -10.5 | -9.0 | | |
| | | $\alpha 42OSD_2$ | — | | -12.0 | -10.5 | -9.0 | | |
| | | $\alpha 43OSD_2$ | — | | -12.0 | -10.5 | -9.0 | | |
| | | $\alpha 41OSD_3$ | — | | — | -40 | -30 | | |
| | $\alpha 42OSD_3$ | — | — | -40 | -30 | | | | |
| | $\alpha 43OSD_3$ | — | — | -40 | -30 | | | | |
| Input crosstalk | Y → RGB input | $V_V \rightarrow A$ | — | Input: Signal 1 ($f_o = 4$ MHz, Amplitude 0.7 Vp-p) | — | -50 | -45 | dB | |
| | Y → OSD input | $V_V \rightarrow O$ | — | | — | -55 | -45 | | |
| | RGB input → Y | $V_A \rightarrow V$ | — | | — | -50 | -45 | | |
| | RGB input → OSD input | $V_A \rightarrow O$ | — | | — | -50 | -45 | | |
| | OSD input → Y | $V_O \rightarrow V$ | — | | — | -45 | -40 | | |
| | OSD input → RGB input | $V_O \rightarrow A$ | — | | — | -50 | -45 | | |
| | RGB input in three axes | — | — | | Input: Signal 1 ($f_o = 1$ MHz, Amplitude 0.7 Vp-p) | — | -50 | | -40 |
| | OSD input in three axes | — | — | | | — | -50 | | -40 |
| Blue stretch point/gain | | BLP_{min} | — | (Note T35) | 23 | 28 | 33 | IRE | |
| | | BLP_{max} | — | | 55 | 60 | 65 | | |
| | | BLG_{min} | — | | 2.4 | 2.9 | 3.4 | dB | |
| | | BLG_{max} | — | | 5.4 | 6.4 | 7.4 | | |
| Blue stretch γ correction | | $BL\gamma_1$ | — | (Note T36) | 84 | 89 | 94 | IRE | |
| | | $BL\gamma_2$ | — | | 89 | 94 | 99 | | |
| | | $BL\gamma_3$ | — | | 93 | 98 | 103 | | |
| | | $BL\gamma_4$ | — | | 98 | 103 | 108 | | |
| White letters improvement | | WPL1 | — | (Note T37) | 16 | 21 | 25 | Vp-p | |
| | | WPL2 | — | | 51 | 56 | 61 | | |
| | | WPL3 | — | | 97 | 102 | 107 | | |

Sync Block

| Characteristics | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|---|---------------------|--------------|--|------|------|------|------------------|
| Sync input horizontal sync phase | S _{PH} | — | (Note HA01) | 0.55 | 0.65 | 0.75 | μs |
| HD input horizontal sync phase | HDP _H | — | (Note HA02) | 0.58 | 0.68 | 0.78 | μs |
| Polarity detecting rage | HD _{DUTY1} | — | (Note HA03) | — | 0.5 | 2.0 | % |
| | HD _{DUTY2} | — | | 62 | 67 | 72 | |
| | HD _{DUTY3} | — | | — | 99.5 | 98 | |
| | HD _{DUTY4} | — | | 47.5 | 52.5 | 57.5 | |
| Sync input threshold amplitude | V _{thS00} | — | (Note HA04) | 10 | 16 | 22 | % |
| | V _{thS01} | — | | 18 | 24 | 30 | |
| | V _{thS10} | — | | 26 | 32 | 38 | |
| | V _{thS11} | — | | 34 | 40 | 46 | |
| HD input threshold voltage | V _{thHD} | — | (Note HA05) | 0.65 | 0.75 | 0.85 | V _{p-p} |
| Horizontal picture position (phase) adjustment variable range | ΔH _{SFT-} | — | (Note HA06) | 11 | 12.5 | 14 | % |
| | ΔH _{SFT+} | — | | 11 | 12.5 | 14 | |
| Horizontal picture position (phase) shift switching amount | H _{SFT} | — | — | 5.2 | 6.7 | 9.2 | % |
| Curve correction variable amount | ΔH _{#23} | — | (Note HA07) | 2.9 | 3.4 | 3.9 | % |
| Clamp pulse phase/width/level | CP _{S0} | — | (Note HA08) | 3.1 | 3.8 | 4.5 | % |
| | CP _{W0} | — | | 2.0 | 2.5 | 3.0 | |
| | CP _{V0} | — | | 4.7 | 5.0 | 5.3 | V |
| | CP _{S1} | — | | 0 | 0.7 | 1.5 | % |
| | CP _{W1} | — | | 1.9 | 2.4 | 2.9 | |
| | CP _{V1} | — | | 4.7 | 5.0 | 5.3 | V |
| | CP _{S2} | — | | 3.2 | 4.2 | 5.2 | % |
| | CP _{W2} | — | | 2.2 | 2.7 | 3.2 | |
| CP _{V2} | — | 4.7 | 5.0 | 5.3 | V | | |
| Black peak detection pulse phase | HBP _{S00a} | — | (Note HA09) | 1.2 | 3.0 | 5.9 | % |
| | HBP _{S00b} | — | | 1.2 | 3.0 | 5.9 | |
| | HBP _{S01a} | — | | 6.0 | 8.0 | 11.0 | |
| | HBP _{S01b} | — | | 6.0 | 8.0 | 11.0 | |
| | HBP _{s10a} | — | | 10.0 | 13.0 | 15.0 | |
| | HBP _{s10b} | — | | 10.0 | 13.0 | 15.0 | |
| | HBP _{s11a} | — | | 16.0 | 18.0 | 21.0 | |
| | HBP _{s11b} | — | | 16.0 | 18.0 | 21.0 | |
| FBP threshold | V _{thFBP} | — | (Note HA10) | 4.8 | 5.3 | 5.8 | V |
| HVCO oscillation start voltage | V _{VCO} | — | Pin 21: Monitor, V _{CC} voltage | 3.0 | 4.0 | 5.0 | V |
| H-OUT start voltage | V _{HON} | — | Pin 26: Monitor, V _{CC} voltage | 5.0 | 6.0 | 7.0 | V |
| H-OUT stop voltage | V _{HOFF} | — | Pin 26: Monitor, V _{CC} voltage | 4.3 | 5.3 | 6.3 | V |
| H-OUT pulse duty | TH _A | — | (Note HB01) | 38 | 41 | 43 | % |
| | TH _B | — | | 44 | 47 | 49 | |

| Characteristics | | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|--|--------|---------------------|--------------|-------------------------|-------|--------|-------|------|
| Horizontal free-run frequency | | F15K | — | (Note HB02) | 15.59 | 15.75 | 15.91 | kHz |
| | | F28K | — | | 27.90 | 28.125 | 28.35 | |
| | | F31K | — | | 31.19 | 31.5 | 31.82 | |
| | | F33K | — | | 33.41 | 33.75 | 34.09 | |
| | | F37K | — | | 37.60 | 37.9 | 38.40 | |
| | | F45K | — | | 44.52 | 45.0 | 45.48 | |
| Horizontal oscillation frequency variable range | | F15K _{MIN} | — | (Note HB03) | 14.78 | 15.08 | 15.38 | kHz |
| | | F15K _{MAX} | — | | 16.37 | 16.70 | 17.03 | |
| | | F28K _{MIN} | — | | 26.00 | 26.90 | 27.80 | |
| | | F28K _{MAX} | — | | 28.90 | 29.70 | 30.60 | |
| | | F31K _{MIN} | — | | 29.47 | 30.06 | 30.65 | |
| | | F31K _{MAX} | — | | 32.72 | 33.39 | 34.06 | |
| | | F33K _{MIN} | — | | 31.41 | 31.94 | 32.57 | |
| | | F33K _{MAX} | — | | 34.91 | 35.62 | 36.33 | |
| | | F37K _{MIN} | — | | 36.50 | 37.30 | 38.20 | |
| | | F37K _{MAX} | — | | 40.20 | 41.10 | 42.10 | |
| | | F45K _{MIN} | — | | 43.20 | 44.00 | 44.80 | |
| | | F45K _{MAX} | — | | 47.85 | 48.65 | 49.45 | |
| Horizontal oscillation control sensitivity | | BH15K | — | Hz/0.1 V (Note HB04) | 176 | 220 | 264 | — |
| | | BH28K | — | | 320 | 400 | 480 | |
| | | BH31K | — | | 352 | 440 | 528 | |
| | | BH33K | — | | 376 | 470 | 564 | |
| | | BH37K | — | | 390 | 480 | 570 | |
| | | BH45K | — | | 520 | 650 | 780 | |
| H-OUT output voltage | | V _{HOH} | — | (Note HB05) | 4.8 | 5.1 | 5.2 | V |
| | | V _{HOL} | — | | — | 0.1 | 0.3 | |
| Horizontal oscillation frequency control voltage threshold | Pin 13 | V _{fHSW1} | — | — | 1.7 | 2.0 | 2.3 | V |
| | Pin 22 | V _{fHSW2L} | — | | 1.3 | 1.5 | 1.7 | |
| | | V _{fHSW2M} | — | | 4.3 | 4.5 | 4.7 | |
| | | V _{fHSW2H} | — | | 7.3 | 7.5 | 7.7 | |
| DAC switch voltage | DAC1 | VDAC _{1H} | — | TEST = (00), DAC1 = (0) | 8.5 | 9.0 | — | V |
| | | VDAC _{1L} | — | TEST = (00), DAC1 = (1) | — | 0.3 | 0.7 | |
| | DAC2 | VDAC _{2H} | — | TEST = (00), DAC2 = (1) | 8.5 | 9.0 | — | |
| | | VDAC _{2L} | — | TEST = (00), DAC2 = (0) | — | 0.3 | 0.7 | |
| VP output pulse width | | VP _W | — | (Note V01) | 4 | 4.5 | 5 | H |
| Vertical free-run (maximum pull-in range) | 000 | VPt0 | — | — | 1278 | 1281 | 1284 | H |
| | 001 | VPt1 | — | | 846 | 849 | 852 | |
| | 010 | VPt2 | — | | 722 | 725 | 728 | |
| | 011 | VPt3 | — | | 657 | 660 | 663 | |
| | 100 | VPt4 | — | | 610 | 613 | 616 | |
| | 101 | VPt5 | — | | 360 | 363 | 366 | |
| | 110 | VPt6 | — | | 304 | 307 | 310 | |
| Vertical minimum pull-in range | | T _{VPULL} | — | (Note V02) | 47 | 48 | 49 | H |

| Characteristics | | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|-------------------------------------|-----|---------------------|-------------------------|----------------|--------|--------|--------|------|
| Vertical black peak detection pulse | 000 | VBPP _{0E} | — | (Note V03) | 51 | 52 | 53 | H |
| | | VBPP _{0S} | — | | 1099.5 | 1100.5 | 1101.5 | |
| | 001 | VBPP _{1E} | — | | 51 | 52 | 53 | |
| | | VBPP _{1S} | — | | 729.5 | 730.5 | 731.5 | |
| | 010 | VBPP _{2E} | — | | 49.5 | 50.5 | 51.5 | |
| | | VBPP _{2S} | — | | 599.5 | 600.5 | 601.5 | |
| | 011 | VBPP _{3E} | — | | 49.5 | 50.5 | 51.5 | |
| | | VBPP _{3S} | — | | 544.5 | 545.5 | 546.5 | |
| | 100 | VBPP _{4E} | — | | 51 | 52 | 53 | |
| | | VBPP _{4S} | — | | 499.5 | 500.5 | 501.5 | |
| | 101 | VBPP _{5E} | — | | 51 | 52 | 53 | |
| | | VBPP _{5S} | — | | 289.5 | 290.5 | 291.5 | |
| | 110 | VBPP _{6E} | — | | 51 | 52 | 53 | |
| | | VBPP _{6S} | — | | 239.5 | 240.5 | 241.5 | |
| Vertical blanking end phase | | V _{BLKMIN} | — | (Note V04) | 15 | 16 | 17 | H |
| | | V _{BLKMAX} | — | | 45 | 46 | 47 | |
| VP output voltage | | High | V _{VPH} | pin 27 voltage | 4.6 | 5.0 | 5.4 | V |
| | | Low | V _{VPL} | | — | 0.1 | 0.5 | |
| SYNC input to VP output delay time | | 15.75 kHz | — | — | 10.0 | 11.6 | 13.4 | μs |
| | | 28.125 kHz | — | | 5.4 | 6.4 | 8.8 | |
| | | 31.5 kHz | — | | 4.8 | 5.8 | 7.6 | |
| | | 33.75 kHz | — | | 4.4 | 5.4 | 7.2 | |
| | | 37.9 kHz | — | | 3.9 | 4.8 | 6.6 | |
| | | 45 kHz | — | | 3.1 | 4.1 | 5.9 | |
| Compression BLK 1 (start phase) | | 000 | CBLK1 _{000min} | — | 1087 | 1088 | 1089 | H |
| | | | CBLK1 _{000max} | — | 1117 | 1118 | 1119 | |
| | | 001 | CBLK1 _{001min} | — | 719 | 720 | 721 | |
| | | | CBLK1 _{001max} | — | 749 | 750 | 751 | |
| | | 010 | CBLK1 _{010min} | — | 591 | 592 | 593 | |
| | | | CBLK1 _{010max} | — | 621 | 622 | 623 | |
| | | 011 | CBLK1 _{011min} | — | 527 | 528 | 529 | |
| | | | CBLK1 _{011max} | — | 557 | 558 | 559 | |
| | | 100 | CBLK1 _{100min} | — | 487 | 488 | 489 | |
| | | | CBLK1 _{100max} | — | 517 | 518 | 519 | |
| | | 101 | CBLK1 _{101min} | — | 279 | 280 | 281 | |
| | | | CBLK1 _{101max} | — | 309 | 310 | 311 | |
| | | 110 | CBLK1 _{110min} | — | 223 | 224 | 225 | |
| | | | CBLK1 _{110max} | — | 253 | 254 | 255 | |

| Characteristics | | Symbol | Test Circuit | Test Condition | Min | Typ. | Max | Unit |
|----------------------------------|---------------------|--------------------------|----------------------|----------------|-----|------|-----|------|
| Compression BLK 2 (end phase) | 000 | CBLK2 ₀₀₀ min | — | — | 49 | 50 | 51 | H |
| | | CBLK2 ₀₀₀ max | — | | 77 | 78 | 79 | |
| | 001 | CBLK2 ₀₀₁ min | — | | 49 | 50 | 51 | |
| | | CBLK2 ₀₀₁ max | — | | 77 | 78 | 79 | |
| | 010 | CBLK2 ₀₁₀ min | — | | 49 | 50 | 51 | |
| | | CBLK2 ₀₁₀ max | — | | 77 | 78 | 79 | |
| | 011 | CBLK2 ₀₁₁ min | — | | 49 | 50 | 51 | |
| | | CBLK2 ₀₁₁ max | — | | 77 | 78 | 79 | |
| | 100 | CBLK2 ₁₀₀ min | — | | 49 | 50 | 51 | |
| | | CBLK2 ₁₀₀ max | — | | 77 | 78 | 79 | |
| | 101 | CBLK2 ₁₀₁ min | — | | 49 | 50 | 51 | |
| | | CBLK2 ₁₀₁ max | — | | 77 | 78 | 79 | |
| | 110 | CBLK2 ₁₁₀ min | — | | 49 | 50 | 51 | |
| | | CBLK2 ₁₁₀ max | — | | 77 | 78 | 79 | |
| External V-BLK input current | I _{EXTBLK} | — | Pin 27 input current | 520 | 625 | 780 | μA | |

Test Condition for Picture Quality (Sharpness) Block

Common Test Condition for Picture Quality (Sharpness) Block



- SW4 = SW5 = B, SW8-SW10 = B, SW20 = ON, SW23 = B, SW33-SW39 = A, SW54 = OPEN
- Send bus control data as preset values, turn ACB operation switching to ACB OFF (00), select Sync input (1), turn P-MODE to Normal 1(000), WPL-LEVEL to max (111), and change subaddress (1C) to (03).
- Input sync signal, which is in sync with input signal for testing except "Sweep", to #14 (Sync input). "H-Freq." should be the same frequency as the one of #14.
- Set Y/color difference input mode to (0), sync separator level to 20 % (01), and vertical free-running frequency to 307H (110).

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|--------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P01 | Black detection level shift | B | C | C | B | OPEN | <ol style="list-style-type: none"> Connect external power supply PS to #3, and monitor #2 and #56. Set black stretch point 1 to OFF (000), and black detection level to 0 IRE (1). Increase PS voltage from 4.95 V in steps of 1 mV. At the moment when #2 picture period (High) drops to Low level, monitor DC difference on #56 V_B. Set black detection level to 3 IRE (0). Repeat the step 3 above and monitor DC difference, V_{B3} on #56. |
| P02 | Black stretch amp maximum gain | B | A | A | B | OPEN | <ol style="list-style-type: none"> Set SW2 to A (maximum gain), and input 500-kHz sine wave to TPA. Adjust signal amplitude to 0.1 Vp-p on #3. Set black stretch point 1 to OFF (000), and measure #56 amplitude V_A. Set black stretch point 1 to 001 (black stretch ON), and measure #56 amplitude V_B. Calculate GBS using a following equation. $GBS = 20 \times \log (V_B + V_A) \text{ [dB]}$ |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|-----------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P03 | Black stretch start point 1 | A | A | C | B | OPEN | <ol style="list-style-type: none"> Set SW2 to A (maximum gain), and black stretch point 1 to OFF (000). Apply 0 V to #1. Connect external power supply PS to #3, increase voltage from V_3, and plot #56 voltage change S1. The #56 voltage is set as V_0 when V_3 is applied, and as V_{100} when $V_3 + 0.7\text{ V}$ is applied. Set black stretch point 1 to minimum (001), increase PS voltage from V_3, and then plot #56 voltage change S2. Set black stretch point to maximum (111), repeat 3 above, then plot #56 voltage change S3. Determine intersection points of S1, S2 (V_{BST1}), and S3 (V_{BST2}) as shown in the figure below. Also calculate P_{BST1} and P_{BST2} using following equations. $V_Z [V] = V_{100} [V] - V_0 [V]$ $P_{BST1} [(IRE)] = [(V_{BST1} [V] - V_{56} [V]) + V_Z] \times 100 (IRE)$ $P_{BST2} [(IRE)] = [(V_{BST2} [V] - V_{56} [V]) + V_Z] \times 100 (IRE)$ |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-----------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P04 | Black stretch start point 2 | A | A | A | B | ON | <ol style="list-style-type: none"> Set black stretch point 1 to OFF (000), apply 0 V to #1, input TG7 LINEARITY to TPA, adjust amplitude on #3 as shown in the figure below, set unicolor to center (1000000), and measure amplitude of #43 (R OUT), V_{P43}. Set black stretch point 1 to 001 (black stretch ON), connect external power supply PS to #56, and monitor #43 (R OUT). Set black stretch start point 2 data to minimum (00). When PS is V_{56} (APL 0%), and $V_{56} + 1.0 V$ (APL 100%), determine black stretch start point difference ΔV_{00} as shown in the figure below. (Monitor input waveform and output waveform with an oscilloscope, adjust the both waveforms to have the same amplitude (gradient), and compare them to determine the bend point of the output.) Set black stretch start point 2 data to maximum (11), determine black stretch start point difference ΔV_{11}. Calculate following equations. $P_{BS1} = (\Delta V_{00} / V_{P43}) \times 100$ $P_{BS2} = (\Delta V_{11} / V_{P43}) \times 100$ |


| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-------------------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P05 | Black stretch characteristic switch | A | A | C | B | OPEN | <ol style="list-style-type: none"> Set SW2 to A (maximum gain), black stretch point 1 (18) to maximum (E0), subaddress (1C) data to (00) and (1E) data to (08). Apply 0 V to #1 and connect external power supply PS to #3. Set PS to $V_3 + 0.7 V$, and adjust unicolor so that DC level of #43 is +1.0 V. Plot voltage change S4 of #43 (voltage in picture period). Determine intersection points (V_{BSC1} and V_{BSC2}) of S2 and S4 obtained from the plot in black stretch start point 1. Then calculate P_{BSC1} and P_{BSC2} using following equation. Set black stretch characteristic switch subaddress data (1C)/(1E) to (20)/(00) and (20)/(08) respectively. As described in steps 2 and 3, determine intersection points (V_{BSC3}, V_{BSC4}, V_{BSC5} and V_{BSC6}) and calculate P_{BSC3}, P_{BSC4}, P_{BSC5} and P_{BSC6}. $P_{BSC*} = (V_{BSC*} [V] - V_{43} [V]) \div 1.0 \times 100 \quad [(IRE)]$ |
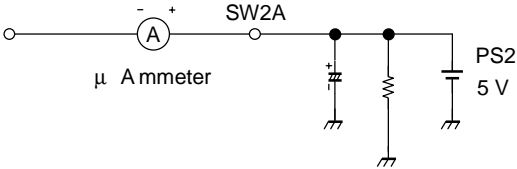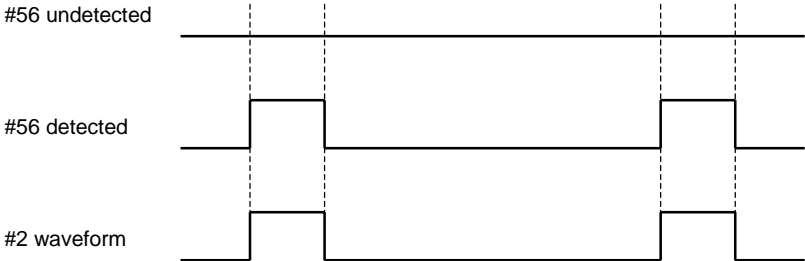
| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|--|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P06 | Black stretch area reinforcement current | B | — | C | B | ON | <ol style="list-style-type: none"> 1. Connect external power supply PS1 to #3. 2. Leave SW2 open, put an ammeter between SW2A and #2, connect external power supply PS2 to SW2A, set PS1 to 5.7 V, and set PS2 to 5 V. 3. Measure current value IBSA0 and IBSA1 when bus data of black stretch area reinforcement [18] is set to ON [80] and OFF [81]. Calculate IBSA using the following equation. $\text{IBSA} = \text{IBSA0} - \text{IBSA1}$  |
| P07 | D.ABL detection voltage | B | A | C | B | OPEN | <ol style="list-style-type: none"> 1. Set D.ABL sensitivity to maximum (11), and black stretch point 1 to OFF (000). 2. Connect external power supply PS to #53 and decrease voltage from 6.5 V. 3. Repeat 2 when D.ABL detection voltage is changed to 00, 01, 10, and 11. At the moment when #56 picture period changes to Low, measure respective PS voltages V_{00}, V_{01}, V_{10}, and V_{11}. 4. Calculate voltage differences between V_{00} and V_{01} (DV_{01}), between V_{00} and V_{10} (DV_{10}), and between V_{00} and V_{11} (DV_{11}) $DV_{***} = V_{00} - V_{01} (V_{10}, V_{11})$  |



| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P08 | D.ABL sensitivity | B | A | C | B | ON | <ol style="list-style-type: none"> Set black stretch point 1 to OFF (00), and connect external power supply to #53. Set D.ABL detection voltage to minimum (00). Interrelation between #53 voltage and #56 voltage when D.ABL sensitivity is set to minimum (00) and maximum (11) can be plotted as figure shown below. Measure gradients SDAMIN and SDAMAX using the figure below. $SDAMIN = \Delta Y / \Delta X$ $SDAMAX = \Delta Y / \Delta X$ |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P09 | Black level correction | B | A | A | B | OPEN | <ol style="list-style-type: none"> Set black stretch point 1[18] to OFF (00). Input signal of 0.7-V picture period amplitude to #3, and measure #43 picture period amplitude VB [V]. Set black level correction [18] to ON [04], determine DC change VBLC [V], and calculate BLC [V] using the following equation $BLC = (VBLC/VB) \times 100 [(IRE)]$ |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|------------------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P10 | Dynamic $Y\gamma$ correction point | A | B | C | B | OPEN | <ol style="list-style-type: none"> 1. Connect external power supply PS1 to #3, PS2 to TP1, and set PS2 to 0 V. 2. Set dark area dynamic $Y\gamma$ gain VS dark area to MIN (00), static $Y\gamma$ gain1 to OFF (000). 3. Increase PS1 from $V_3 [V]$ to $V_3 [V] + 0.7 V$ and plot voltage change of #43 picture period. Take 0 for $V_3 [V]$ when the change is plotted. (V_3 is pin voltage of pin 3) 4. Set dark area dynamic $Y\gamma$ gain VS dark area max (11), static $Y\gamma$ gain1 to max (111) and PS2 to 1.2 V. 5. Increase PS1 from $V_3 [V]$ to $V_3 [V] + 0.7 V$ and plot voltage change of #43 picture period. 6. Measure VDGP by the following figure, and P_{DGP} using the following equation. $DGP = (VDGP [V] - V_3 [V]) / 0.7 [V] \times 100$ |


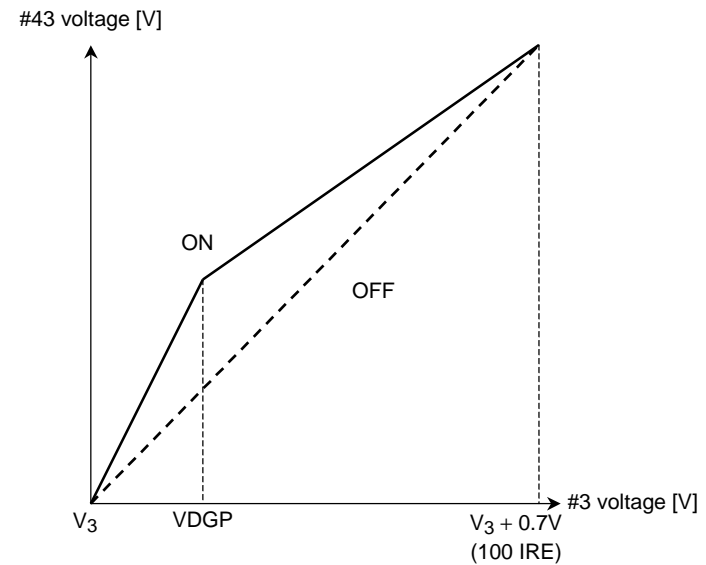



| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|----------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P11 | Dark area dynamic $Y\gamma$ gain | A | B | C | B | OPEN | <ol style="list-style-type: none"> 1. Connect external power supply PS1 to #3, external power supply PS2 to TP1, and set PS2 to 0 V. 2. Set dark area dynamic $Y\gamma$ gain [1C] to MIN [03], and dark area static $Y\gamma$ gain [1C] to 0dB [17]. 3. Set PS1 to V_3 [V], and measure #43 picture period voltage $VDDGV_3$ [V]. Set PS1 VDGP [V], and measure #43 picture period voltage $VDDGMIN$ [V]. 4. Set dark area dynamic $Y\gamma$ gain [1C] to MAX [D7], PS2 to 1.2 V, measure voltage $VDDGMAX$ [V] of #43 picture period when PS1 is VDGP [V], and calculate the following equations. $VDDGMAX - VDDGMIN = A$ $VDDGMIN - VDDGV_3 = B$ $GDDGMAX = 20 \log [B/(B-A)] \text{ [dB]}$ <div style="text-align: center;"> <p>#43 voltage [V]</p> <p>#3 voltage [V]</p> <p>V_3 $VDGP$ $V_3 + 0.7\text{ V}$ (100IRE)</p> <p>$VDDGMAX$ $VDDGMIN$ $VDDGV_3$</p> <p>ON OFF</p> <p>$VDDGMAX - VDDGMIN = A$</p> <p>$VDDGMIN - VDDGV_3 = B$</p> </div> |
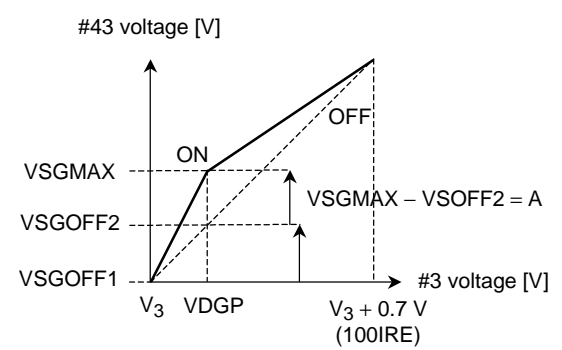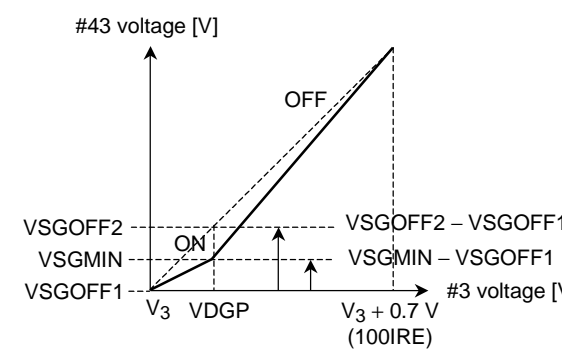
| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|----------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P12 | Dark area static Y_γ gain | A | B | C | B | OPEN | <ol style="list-style-type: none"> Connect external power supply PS1 to #3, external power supply PS2 to TP1, and set PS2 to 0 V. Set dark area dynamic Y_γ gain [1C] to MIN [03], and dark area static Y_γ gain [1C] to OFF [03]. Set PS1 to V_3 [V], and measure #43 picture period voltage VSGOFF1 [V]. Set PS1 to VDGP [V], and measure #43 picture period voltage VSGOFF2 [V]. Set dark area static Y_γ gain [1C] to MAX [1F], PS1 to VDGP [V], measure #43 picture period voltage VSGMAX, and calculate GDSGMAX using the following equations. $\text{VSGMAX} - \text{VSGOFF2} = A$ $\text{VSGOFF2} - \text{VSGOFF1} = B$ $\text{GDSGMAX} = 20 \times \log [B/(B - A)] \text{ [dB]}$  Set dark area static Y_γ gain [1C] to MIN [07], PS1 to VDGP [V], measure #43 picture period voltage VSGMIN, and calculate GDSGMIN using the following equation. $\text{GDSGMIN} = 20 \times \log [(\text{VSGMIN} - \text{VSGOFF1})/(\text{VSGOFF2} - \text{VSGOFF1})] \text{ [dB]}$  |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|---------------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P13 | Light area $Y\gamma$ correction point | A | B | C | A | OPEN | <ol style="list-style-type: none"> 1. Connect external power supply PS1 to #3, external power supply PS2 to TP1, and set PS2 to 0 V. 2. Set dark area static $Y\gamma$ gain [1C] to 0dB [17], and bright area static $Y\gamma$ gain [1C] to 0dB [17]. 3. Increase PS1 from V_3 [V] to V_3 [V] + 0.7 [V], and plot the voltage change of #43 picture period. Take 0 for V_3 [V] when the change is plotted. (V_3 is pin voltage of pin 3) 4. Set light area static $Y\gamma$ gain [1C] to MAX [04]. 5. Increase PS1 from V_3 [V] to V_3 [V] + 0.7 [V], and plot the voltage change of #43 picture period. 6. Measure VLGP using the following figure, and PLGP using the following equation. $\text{LGP} = (\text{VLGP [V]} - V_3 \text{ [V]}) / 0.7 \text{ [V]} \times 100 \quad (\text{IRE})$ <div style="text-align: center;"> </div> |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|------------------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P14 | Light area dynamic Y_γ gain | A | B | C | A | OPEN | <ol style="list-style-type: none"> 1. Connect external power supply PS1 to #3, external power supply PS2 to TP7, and set PS2 to 1.2 V. 2. Set dark area static Y_γ gain [1C] to 0dB [17], and light area static Y_γ gain [1C] to 0dB [17]. 3. Set PS1 to V_3 [V], and measure #43 picture period voltage VLDGOFF1. 4. Set PS1 to VLGP [V], and measure #43 picture period voltage VLDGOFF2. 5. Set light area static Y_γ gain [1C] to MAX [14], PS2 to 0 V, PS1 to VLGP [V], determine #43 picture period voltage VLDGMAX [V] using the following equations. $\text{VLDGMAX} - \text{VLDGOFF2} = A$ $\text{VLDGOFF2} - \text{VLDGOFF1} = B$ $\text{GLDG} = 20 \times \log [B/(B - A)]$ |
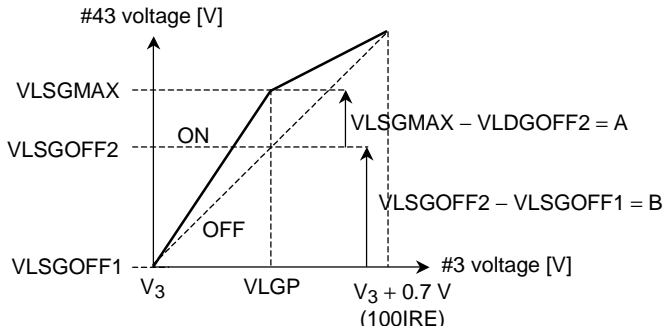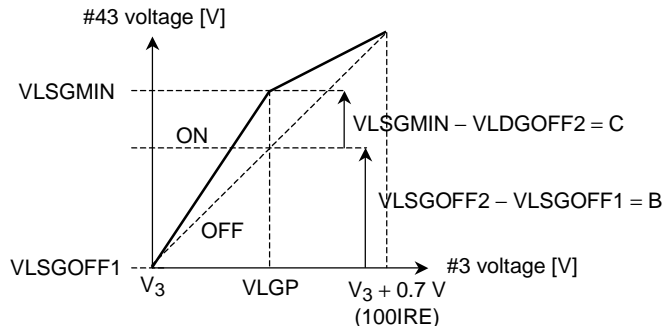
| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|----------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P15 | Light area static $Y\gamma$ gain | B | B | C | A | OPEN | <ol style="list-style-type: none"> Connect external power supply PS1 to #3, external power supply PS2 to TP7, and set PS2 to 0 V. Set dark area static $Y\gamma$ gain [1C] to 0dB [17], and light area static $Y\gamma$ gain [1C] to 0dB [17]. Set PS1 to V_3 [V], and measure #43 picture period voltage VLSGOFF1 [V]. Set PS1 to VLGP [V], and measure #43 picture period voltage VLDGOFF2 [V]. Set light area static $Y\gamma$ gain [1C] to MAX [14], PS1 to VLGP [V], measure #43 picture period voltage VISGMAX, and calculate GLASGMAX [dB] using the following equations. $VLSGMAX - VLSGOFF2 = A$ $VLSGOFF2 - VLSGOFF1 = B$ $GLSGMAX = 20 \times \log [B/(B - A)] \text{ [dB]}$  Set light area static $Y\gamma$ gain [1C] to MIN [16], PS1 to VLGP [V], measure #43 picture period voltage VLSGMIN, and calculate GLSGMIN [dB] using the following equations. $VLSGMIN - VLSGOFF2 = C$ $VLSGOFF2 - VLSGOFF1 = B$ $GLSGMIN = 20 \times \log [B/(B - C)] \text{ [dB]}$  |

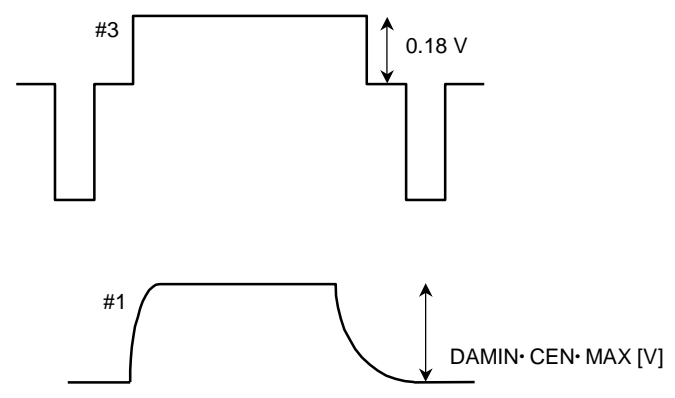
| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|---------------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P16 | Dark area detection sensitivity | A | B | A | A | OPEN | <ol style="list-style-type: none"> Input the signal whose picture period amplitude is 0.18 V to #3 as shown in the figure below. Measure #1 pin voltage DAMIN, DACEN, and DAMAX [V] when dark area detection sensitivity [1D] is set to MIN [00], CEN [04] and MAX [07].  |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-------------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P17 | DC restoration rate correction gain | B | B | C | B | ON | <ol style="list-style-type: none"> Set DC restoration rate correction point to minimum (000), DC restoration rate correction limit point to 80% (11), and connect external power supply PS1 to #3. Monitor DC level of #43 picture period. Set PS1 to $V_3 + 0.7 V$, and adjust uncolor so that DC level is $+0.7$. Set DC restoration correction rate to minimum (000), and measure V_{DT1} and V_{DT2} of $V_3 [V]$ and $V_3 + 0.1 V$ as shown in the figure below. Set #3 to $V_3 + 0.1 V$, DC restoration correction rate to maximum (111), and measure V_{DT3}. Set DC restoration correction rate SW to less than 100 % (1), #3 to $V_3 + 0.1 V$, DC restoration correction rate to maximum (111), and measure V_{DT4}. Calculate ADT_{100}, ADT_{135}, and ADT_{65} using following equations. $ADT_{100} = (V_{DT2} [V] - V_{DT1} [V]) \div 0.1 [V]$ $ADT_{135} = (V_{DT3} [V] - V_{DT1} [V]) \div 0.1 [V]$ $ADT_{65} = 1 - ((V_{DT2} [V] - V_{DT4} [V]) \div 0.1 [V])$ |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|--------------------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P18 | DC restoration rate correction point | B | B | C | B | ON | <ol style="list-style-type: none"> Set DC restoration rate correction point to minimum (000), DC restoration rate correction limit point to 80% (11), and connect external power supply PS1 to #3. Monitor DC level of #43 picture period. Set PS1 to $V_3 + 0.7 V$, and adjust unicolor so that DC level is + 1.0. Set DC restoration correction rate to minimum (000), and increase PS1 from V_3. Plot relation between #56 (DC voltage) and #43 (voltage in picture period). Set DC restoration correction rate to maximum (111), and increase PS1 from V_3. Plot relation between #56 and #43. Set DC restoration correction rate to maximum (111), DC restoration rate correction point (111), and increase PS1 from V_3. Plot relation between #56 and #43. Determine V_{DT0}, and V_{DT1} using the following equations. $V_{DT0} = [(V_{SP0} - V_{56})/1 V] \times 100\%$ $V_{DT1} = [(V_{SP1} - V_{56})/1 V] \times 100\%$ |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|--|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P19 | DC restoration rate correction limit point | B | B | B | C | ON | <ol style="list-style-type: none"> Set unicolor to maximum (1111111), DC restoration rate correction point to minimum (000), and connect external power supply PS1 to #56. Set DC restoration correction rate to maximum (111). Increase PS from 5 V. Monitor #43, and plot DC restoration correction amount. Repeat the step 3 above by changing data at DC restoration rate correction limit point. Measure the value using the figure below. Calculate P_{DTL60}, P_{DTL75}, P_{DTL87}, and P_{DTL100} using following equations. $P_{DTL60} = [(V_{L60} - V_{56})/1.0] \times 100\%$ $P_{DTL75} = [(V_{L75} - V_{56})/1.0] \times 100\%$ $P_{DTL87} = [(V_{L87} - V_{56})/1.0] \times 100\%$ $P_{DTL100} = [(V_{L100} - V_{56})/1.0] \times 100\%$ |


| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|--|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P20 | DC fluctuation at switching sharpness control peak frequency | B | B | A | B | ON | <ol style="list-style-type: none"> Set unicolor [05] to MAX [7F], SRT gain [19] to MIN [00], and CDE [15] to CEN [80]. Input setup signal (0.2 Vp-p) to TPA as shown in the figure below. Set sharpness [09] to MIN [00] and MAX [80]. Monitor #43, measure DC level VRDCMIN and VRDCMAX [V]. Calculate VRDC [V] using the following equation. $VRDC = VRDCMIN - VRDCMAX \quad [V]$ |

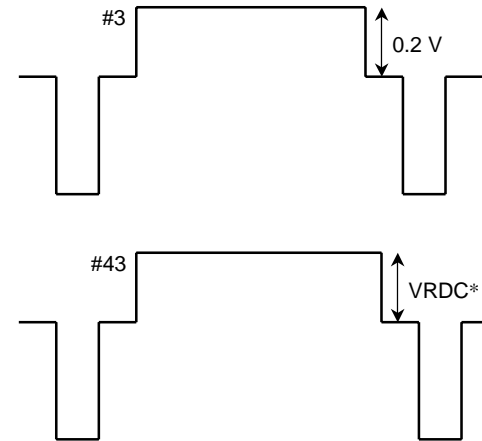

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P21 | Sharpness control range | B | B | A | B | ON | <ol style="list-style-type: none"> 1. Input sine wave to TPA. (The frequency is variable.) 2. Set #3 amplitude to 20 mVp-p. 3. Set unicolor to maximum (1111111), SRT-GAIN to minimum (00000), APACON peak frequency to 13.5 M (00), and color detail enhancer (CDE) to center (10). 4. Set picture mute to OFF (P-MODE: Normal 1, 000), and monitor #43. 5. Set picture sharpness to center (1000000). Set input frequency to 100 kHz, and measure the amplitude V_{100}. 6. Set picture sharpness to maximum (1111111). Set input frequency to F_{AP00}, measure the amplitude V_{MAX00}, and calculate G_{MAX00} using the following equations. 7. Set picture sharpness to minimum (0000000). Set input frequency to F_{AP00}, measure the amplitude V_{MIN00}, and calculate G_{MIN00} using the following equations. 8. Set APACON peak frequency to 9.5 M (01). Set input frequency to F_{AP01}, measure V_{MAX01}/V_{MIN01} and calculate G_{MAX01}/G_{MIN01}. 9. Set APACON peak frequency to 6.4 M (10). Set input frequency to F_{AP10}, measure V_{MAX10}/V_{MIN10} and calculate G_{MAX10}/G_{MIN10}. 10. Set APACON peak frequency to 4.5 M (11). Set input frequency to F_{AP11}, measure V_{MAX11}/V_{MIN11} and calculate G_{MAX11}/G_{MIN11}. $G_{MAX***} = 20 \times \log (V_{MAX***} \div V_{100}) \text{ [dB]}$ $G_{MIN***} = 20 \times \log (V_{MIN***} \div V_{100}) \text{ [dB]}$ <p>Note: When a spectrum analyzer is used, measure gain for low frequency.</p> |


| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|---|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P22 | Sharpness control center characteristic | B | B | A | B | ON | <ol style="list-style-type: none"> 1. Input sine wave to TPA. (The frequency is variable.) 2. Set the amplitude of #3 to 20 mVp-p. 3. Set unicolor to maximum (11111111), SRT-GAIN to minimum (00000), APACON peak frequency to 13.5 M (00), and color detail enhancer (CDE) to center (10). 4. Set picture mute to OFF (P-MODE: Normal 1, 000), and monitor #43. 5. Set picture sharpness to center (1000000). Set input frequency to 100 kHz, and measure the amplitude V_{100}. 6. Set picture sharpness to center (1000000). Set input frequency to F_{AP00}, measure #43 amplitude V_{CEN00}, and calculate G_{CEN00} using the following equations. 7. Set APACON peak frequency to 9.5 M (01). Set input frequency to F_{AP01}, measure V_{CEN01} and calculate G_{CEN01}. 8. Set APACON peak frequency to 6.4 M (10). Set input frequency to F_{AP10}, measure V_{CEN10} and calculate G_{CEN10}. 9. Set APACON peak frequency to 4.5 M (11). Set input frequency to F_{AP11}, measure V_{CEN11} and calculate G_{CEN11}. $G_{CEN***} = 20 \times \log (V_{CEN***} \div V_{100}) \text{ [dB]}$ <p>Note: When a spectrum analyzer is used, measure gain for low frequency.</p> |

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-------------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P23 | 2T pulse response SRT control | B | B | A | B | ON | <ol style="list-style-type: none"> Input 2T pulse (0.7 Vp-p) signal to TPA. Set unicolor to maximum (111111), SRT-GAIN to minimum (00000), CDE to center (10) picture sharpness control to center (1000000). Set APACON peak frequency to 13.5 M (00), and monitor #43. Measure $T_{SRTMIN00}$ and $V_{SRTMIN00}$ as shown in the figure below. Set SRT-GAIN to maximum (11111), and measure $T_{SRTMAX00}$ and $V_{SRTMAX00}$. Set APACON peak frequency to 9.5 M (01). Set SRT-GAIN to minimum (00000) and maximum (11111). Measure $T_{SRTMIN01}/V_{SRTMIN01}$ and $T_{SRTMAX01}/V_{SRTMAX01}$. Set APACON peak frequency to 6.4 M (10). Set SRT-GAIN to minimum (00000) and maximum (11111). Measure $T_{SRTMIN10}/V_{SRTMIN10}$ and $T_{SRTMAX10}/V_{SRTMAX10}$. Set APACON peak frequency to 4.5 M (11). Set SRT-GAIN to minimum (00000) and maximum (11111). Measure $T_{SRTMIN11}/V_{SRTMIN11}$ and $T_{SRTMAX11}/V_{SRTMAX11}$. Calculate the following equations. $T_{SRT00} = 20 \times \log [(V_{SRTMAX00}/T_{SRTMAX00})/(V_{SRTMIN00}/T_{SRTMIN00})]$ $T_{SRT01} = 20 \times \log [(V_{SRTMAX01}/T_{SRTMAX01})/(V_{SRTMIN01}/T_{SRTMIN01})]$ $T_{SRT10} = 20 \times \log [(V_{SRTMAX10}/T_{SRTMAX10})/(V_{SRTMIN10}/T_{SRTMIN10})]$ $T_{SRT11} = 20 \times \log [(V_{SRTMAX11}/T_{SRTMAX11})/(V_{SRTMIN11}/T_{SRTMIN11})]$ |

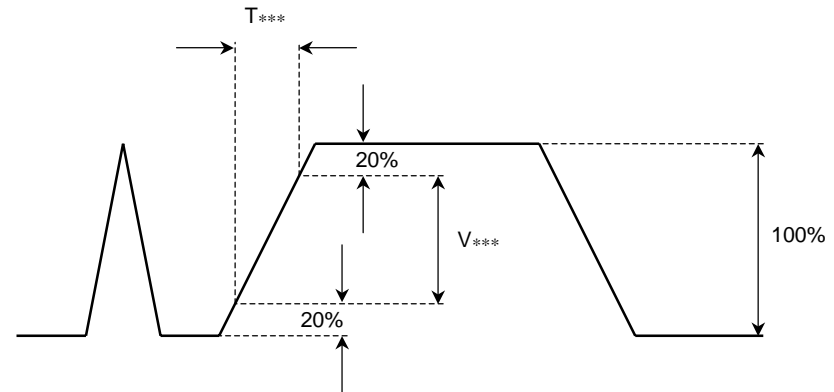


| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|-----------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P24 | VSM gain | B | B | A | B | ON | <ol style="list-style-type: none"> Input sine wave of F_{VSM} frequency to TPA. Set #3 amplitude to 0.02 Vp-p. Turn on SW54 and change VSM gain from minimum (001) to maximum (111). Measure #54 amplitude, V_{001}, V_{011}, V_{100}, V_{101}, V_{110}, and V_{111}. Set input amplitude to 0.7 Vp-p, and VSM gain to OFF (000). Measure TP54 amplitude V_{000}. Calculate the following equations. $G_{V000} = 20 \times \log (V_{000}/0.7) \text{ [dB]}$ $G_{V001} = 20 \times \log (V_{001}/0.02) \text{ [dB]}$ $G_{V010} = 20 \times \log (V_{010}/0.02) \text{ [dB]}$ $G_{V011} = 20 \times \log (V_{011}/0.02) \text{ [dB]}$ $G_{V100} = 20 \times \log (V_{100}/0.02) \text{ [dB]}$ $G_{V101} = 20 \times \log (V_{101}/0.02) \text{ [dB]}$ $G_{V110} = 20 \times \log (V_{110}/0.02) \text{ [dB]}$ $G_{V111} = 20 \times \log (V_{111}/0.02) \text{ [dB]}$ |
| P25 | VSM limit | B | B | B | A | ON | <ol style="list-style-type: none"> Input sine wave of frequency F_{VSM} to TPA. Set VSM gain to 111, and #3 amplitude to 0.7 Vp-p. Turn on SW54 and measure TP54 amplitude V_{LU} and V_{LD} [Vp-p] as shown in the figure below. <div style="text-align: center;"> </div> |


| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P26 | Y delay time switching | B | B | A | B | ON | <ol style="list-style-type: none"> Set unicolor to maximum (1111111), SRT-GAIN to minimum (00000), and input 2T pulse signal (approximately 0.7 V (p-p)) to TPA. Set picture sharpness to center (1000000). Monitor #3 and #43 as shown in the figure below. Measure YDL00 that is the time difference between signals #3 and #43. Set Y/C-DL1 to +5 ns (1), and measure YDL01 as shown in the figure below. Set Y/C-DL1 to 0 ns (0), Y/C-DL2 to +10 ns (1) and measure YDL10 as shown in the figure below. Set Y/C-DL1 to +5 ns (1), Y/C-DL2 to +10 ns (1) and measure YDL11 as shown in the figure below. Determine YDLA, YDLB, and YDLC using the following equations. $YDLA = YDL01 - YDL00$ $YDLB = YDL10 - YDL00$ $YDLC = YDL11 - YDL00$ |

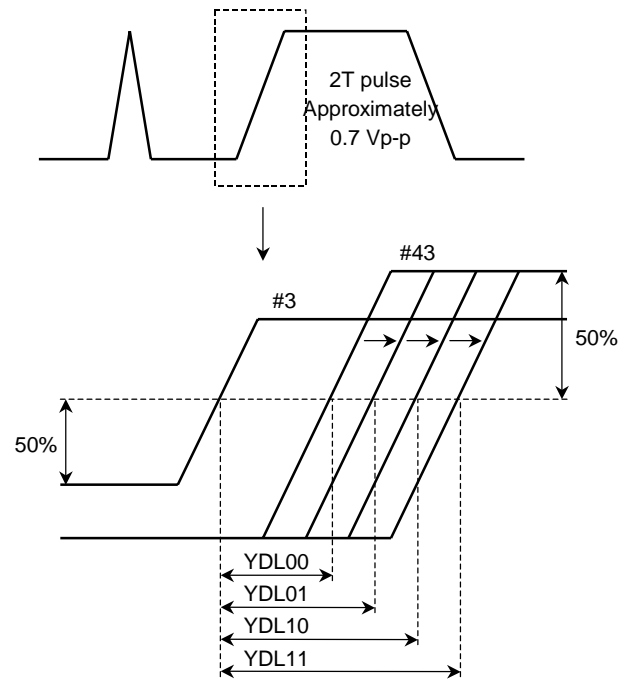

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|--------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P27 | Y group delay correction | B | B | A | B | ON | <ol style="list-style-type: none"> Input Multi Burst signal (4.2-MHz frequency, 0.1 Vp-p at #3) of A signal in TPA. Set unicolor to maximum (1111111), SRT-GAIN to minimum (00000), and Color detail enhancer (CDE) to minimum (00000). Set sharpness to flat (DEC [30]), APACON peak frequency to 4.5 M (11), and monitor #43. Sine wave signal A input becomes like signal B on #43 as shown in the figure on the right. Measure S_A and S_B. When group delay correction is set to minimum (0000), signal A becomes like signal C on #43. Measure S_{AMIN} and S_{BMIN}. When group delay correction is set to maximum (1111), signal A becomes like signal D on #43. Measure S_{AMAX} and S_{BMAX}. Calculate the following equations. $G_{AMIN} = 20 \times \log (S_{AMIN}/S_A)$ [dB] $G_{BMIN} = 20 \times \log (S_{BMIN}/S_B)$ [dB] $G_{AMAX} = 20 \times \log (S_{AMAX}/S_A)$ [dB] $G_{BMAX} = 20 \times \log (S_{BMAX}/S_B)$ [dB] <p>Note: Sine wave input starts and ends within the picture period such as a burst signal. The wave is not continuous.</p> |

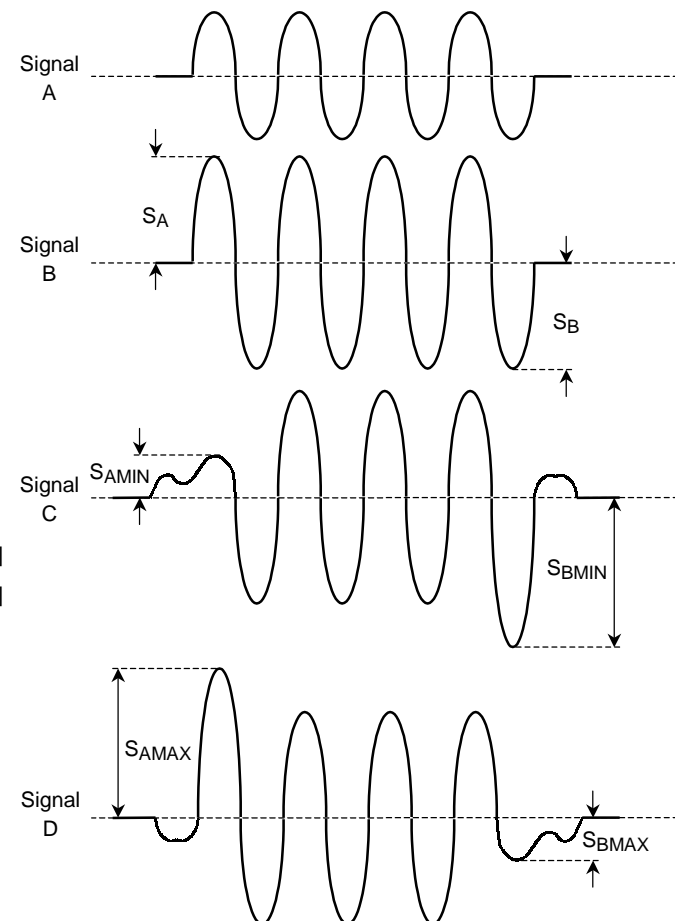

| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-----------------------------|-----------------|-----|-----|-----|------|---|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P28 | Color detail enhancer (CDE) | B | B | A | B | ON | <ol style="list-style-type: none"> Set unicolor to maximum (1111111), SRT-GAIN to minimum (00000), color to center (1000000), and color limiter level to 2 Vp (1). Input SWEEP signal to TPA so that #3 amplitude is 20 mVp-p. Set SW4 to A, and input signal as shown in the figure below (#4 amplitude is 0.2 Vp-p) to TP4. Set picture sharpness to center (1000000), Y detail control to center (1000), and monitor #41 with a spectrum analyzer. When CDE is at minimum (00), set low frequency area to 0dB, and determine peak level G_{CDEMIN}. When CDE is at maximum (11), set low frequency area to 0dB, and determine peak level G_{CDEMAX}. Calculate the following equation. $G_{CDE00} = G_{CDEMAX00} - G_{CDEMIN00}$ When APACON peak frequency is 13.5 M (00), 9.5 M (01), 6.4 M (10), and 4.5 M (11), calculate G_{CDE00}, G_{CDE01}, G_{CDE10}, and G_{CDE11} respectively using above equation. |

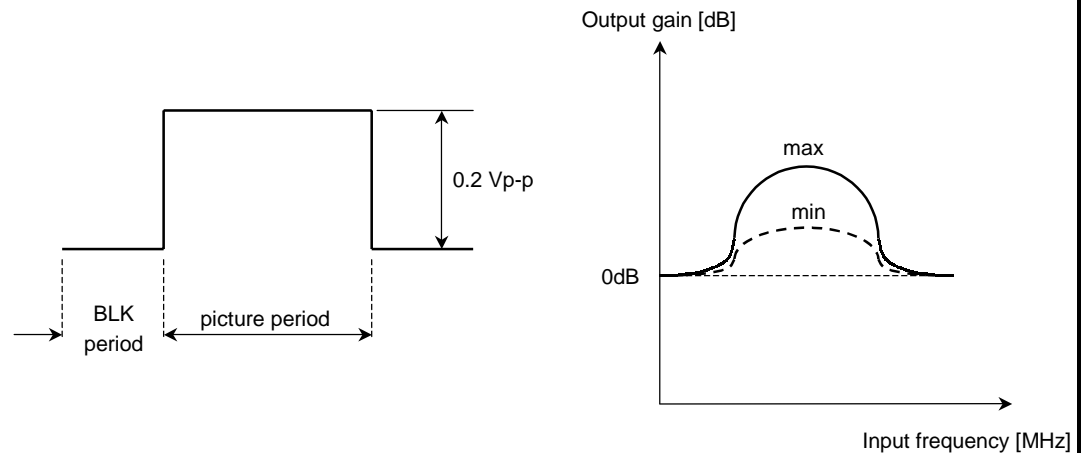


| Note No. | Characteristics | Test Conditions | | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^{\circ}C$) |
|----------|------------------------|-----------------|-----|-----|-----|------|--|
| | | SW Mode | | | | | |
| | | SW1 | SW2 | SW3 | SW7 | SW56 | |
| P29 | Y detail control range | B | B | A | B | ON | <ol style="list-style-type: none"> 1. Set unicolor to maximum (1111111), SRT-GAIN to minimum (00000), CDE to center (10), and APACON peak frequency to 4.5 M (11). Input SWEEP signal to TPA. 2. Set #3 amplitude to 20mVp-p. 3. Set picture sharpness to center (1000000), Y detail control to maximum (1111), and monitor #43 with a spectrum analyzer. 4. Set low frequency area to 0dB, and measure each peak level G_{YDMAX}. 5. Set Y detail control to center (1000), and measure peak level G_{YDCEN}. 6. Set Y detail control to minimum (0000), and measure peak level G_{YDMIN}. |

Test Conditions for Color Difference Block 1: YUV input and matrix

Common Test Condition for Color Difference Block 1: YUV input and matrix

1. SW1 = B, SW2 = B, SW20 = ON, SW33~SW39 = A, SW54 = OPEN, SW56 = OPEN
2. Transfer BUS control data with preset values.
3. Turn ACB operation switching to ACB OFF (0), and turn high blight color OFF (0).
4. Input sync signal [must be sync with input signal for testing except Sweep.] to #14 (sync input), and set SYNC-IN-SW to 1.


| Note No. | Characteristics | Test Conditions | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^\circ C$) |
|----------|-----------------|-----------------|-----|------|-----|--|
| | | SW Mode | | | | |
| | | SW3 | SW4 | SW5 | SW7 | |
| S01 | Color SRT gain | C | A | A | B | <ol style="list-style-type: none"> 1. Set Y mute ON (P-MODE: Y-MUTE, 001), brightness to center (10000000), color to center (1000000), unicolor to maximum (1111111). 2. Input 2T pulse signal to TP4 so that #4 amplitude is 423 mVp-p. 3. Monitor #41 output waveform. When color SRT peak frequency is 4.5 MHz (0), measure gradients of color SRT gain for minimum (00), center (10), and maximum (11) that are SB00MIN, SB00CEN, and SB00MAX as shown in the figure below. Set SB00MIN to 0dB, calculate $G_{SB00CEN} = 20 \times \log (SB00CEN/SB00MIN)$ and $G_{SB00MAX} = 20 \times \log (SB00MAX/SSB00MIN)$. 4. When color SRT peak is 5.8 MHz (1), measure gradients of color SRT gain for minimum (00), center (10), and maximum (11). Calculate $G_{SB01CEN}$ and $G_{SB01MAX}$. 5. Input 2T pulse signal to TP5 so that #5 amplitude is 300 mVp-p. 6. Monitor #43 output waveform. When color SRT peak frequency is 4.5 MHz (0), measure gradients of color SRT gain for minimum (00), center (10), and maximum (11) that are SR00MIN, SR00CEN, and SR00MAX as shown in the figure below. Set SR00MIN to 0dB, calculate $G_{SB00CEN} = 20 \times \log (SB00CEN/SB00MIN)$ and $G_{SB00MAX} = 20 \times \log (SB00MAX/SSB00MIN)$. 7. When color SRT peak is 5.8 MHz (1), measure gradients of color SRT gain for minimum (00), center (10), and maximum (11). Calculate $G_{SR01CEN}$ and $G_{SR01MAX}$. |
| | | SW8 | SW9 | SW10 | | |
| | | B | B | B | | |

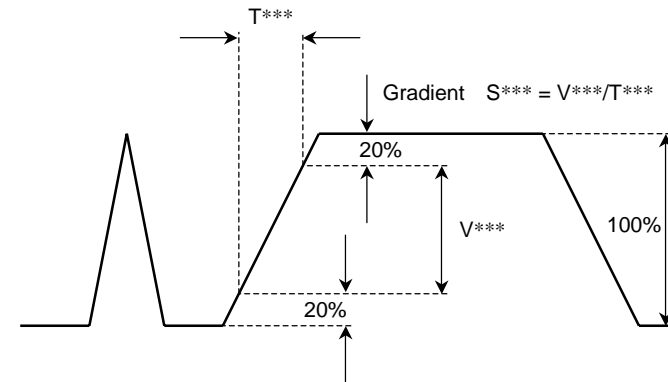

| Note No. | Characteristics | Test Conditions | | | | Test Method (Test condition: $V_{CC} = 9\text{ V}/2\text{ V}$, $T_a = 25 \pm 3^\circ\text{C}$) |
|----------|--------------------------|-----------------|-----|------|------|--|
| | | SW Mode | | | | |
| | | SW3 | SW4 | SW5 | SW7 | |
| S02 | Dynamic Y/C compensation | C | A | A | B | <ol style="list-style-type: none"> Input 100-kHz sync signal to TP4, and set #4 amplitude to 0.2 Vp-p. Set Y mute OFF (P-MODE: Normal 1, 000), brightness to center (1000000), color to center (1000000), unicolor to maximum (1111111), and Y/C Gain Comp to minimum (00). Set black stretch point 1 to OFF (000), dark area static $Y\gamma$ gain to minimum (00), light area static $Y\gamma$ gain to maximum (11), and SW1 to B. Apply 5.16 V to #3 from external power supply PS1. Monitor #41 output waveform, and measure amplitude VBDY0. Set Y/C Gain Comp to maximum (11). Set SW1 to B. Set black stretch point 1 to OFF (000), dark area static $Y\gamma$ gain to maximum (11), light area static $Y\gamma$ gain to maximum (00), and monitor #41 amplitude VBDY1. Set Y/C Gain Comp to maximum (11). Switch SW1 to A, and TPI to GND. Set black stretch point 1 to maximum (111), dark area static $Y\gamma$ gain to minimum (00), bright area static $Y\gamma$ gain to maximum (11), and monitor #41 amplitude VBDY2. Calculate the following equations. $GC_{BDY1} = 20 \times \log (VBDY1/VBDY0), GC_{BDY2} = 20 \times \log (VBDY2/VBDY0)$ Input 100-kHz sync signal to TP5, and repeat the procedure above. Calculate the following equations. $GC_{RDY1} = 20 \times \log (VRDY1/VRDY0), GC_{RDY2} = 20 \times \log (VRDY2/VBDY0)$ |
| | | SW8 | SW9 | SW10 | SW56 | |
| | | B | B | B | OPEN | |

| Note No. | Characteristics | Test Conditions | | | | Test Method (Test condition: $V_{CC} = 9 V/2 V$, $T_a = 25 \pm 3^{\circ}C$) |
|----------|-----------------|-----------------|-----|------|------|--|
| | | SW Mode | | | | |
| | | SW3 | SW4 | SW5 | SW7 | |
| S03 | YUV gain | A/C | A/B | A/B | B | <ol style="list-style-type: none"> Set picture mute to OFF (P-MODE: Normal 1, 000), brightness to maximum (11111111), color to center (1000000), and unicolor to maximum (11111111). Set SW3 to A. Set SW4 and SW5 to B, and input 100-kHz sine wave to TPA. Set #3 amplitude to 0.2 Vp-p. Set SW56 open. Measure #56 amplitude VY00 and VY01 when Y/color difference input mode is set to Y/Cb/Cr (0) and Y/Pb/Pr (1). Set SW3 to C, SW4 to A, and SW5 to B. Input 100-kHz sine wave to TP4, and set #4 amplitude to 0.2 Vp-p. Measure #41 amplitude VB00 when Y/color difference input mode is set to Y/Cb/Cr (0). Measure #41 and #43 amplitude VBB01 and VBR01 when Y/color difference input mode is set to Y/Pb/Pr (1). Set SW3 to C, SW4 to B, and SW5 to A. Input 100-kHz sine wave to TP5, and set #5 amplitude to 0.2 Vp-p. Measure #43 amplitude VR00 when Y/color difference input mode is set to Y/Cb/Cr (0). Measure #41 and #43 amplitude VRB01 and VRR01 when Y/color difference input mode is set to Y/Pb/Pr (1). Calculate the following equations. $G_{Y00} = 20 \times \log (VY00/0.2), G_{Y01} = 20 \times \log (VY01/0.2)$ $G_{CBB} = 20 \times \log (VB00/0.2), G_{PBB} = 20 \times \log (VBB01/0.2),$ $G_{PBR} = 20 \times \log (VBR01/0.2)$ $G_{CRR} = 20 \times \log (VR00/0.2), G_{PRB} = 20 \times \log (VRB01/0.2),$ $G_{PRR} = 20 \times \log (VRR01/0.2)$ |
| | | SW8 | SW9 | SW10 | SW56 | |
| | | B | B | B | OPEN | |

| Note No. | Characteristics | Test Conditions | | | | Test Method (Test condition: V _{CC} = 9 V/2 V, T _a = 25 ± 3°C) |
|----------|-----------------|-----------------|------|------|------|--|
| | | SW Mode | | | | |
| | | SW3 | SW4 | SW5 | SW7 | |
| S04 | Green stretch | C | A | A | — | 1. Input signal B as shown in the figure below from TP4 (Cb/Pb1 input), and signal A from TP5 (Cr/Pr input). 2. Set brightness [06] to maximum (FF). 3. Measure amplitudes A, B, C, D, and E at #42 (Gout) as shown in the figure below. (A00 to E00) 4. Set green stretch [14] data to (08), and repeat the step 3 above. (A01 to E01) 5. Set green stretch [14] data to (10), and repeat the step 3 above. (A10 to E10) 6. Set green stretch [14] data to (18), and repeat the step 3 above. (A11 to E11) 7. Green stretch gain is calculated by the following equations $\text{GrA01} = \frac{A01}{A00} \quad \text{GrA10} = \frac{A10}{A00} \quad \text{GrA11} = \frac{A11}{A00}$ $\text{GrB01} = \frac{B01}{B00} \quad \text{GrB10} = \frac{B10}{B00} \quad \text{GrB11} = \frac{B11}{B00}$ $\text{GrC01} = \frac{C01}{C00} \quad \text{GrC10} = \frac{C10}{C00} \quad \text{GrC11} = \frac{C11}{C00}$ $\text{GrD01} = \frac{D01}{D00} \quad \text{GrD10} = \frac{D10}{D00} \quad \text{GrD11} = \frac{D11}{D00}$ $\text{GrE01} = \frac{E01}{E00} \quad \text{GrE10} = \frac{E10}{E00} \quad \text{GrE11} = \frac{E11}{E00}$ |
| | | SW33 | SW34 | SW35 | SW37 | |
| | | A | A | A | A | |
| | | SW38 | SW39 | — | — | |
| | | A | A | — | — | |

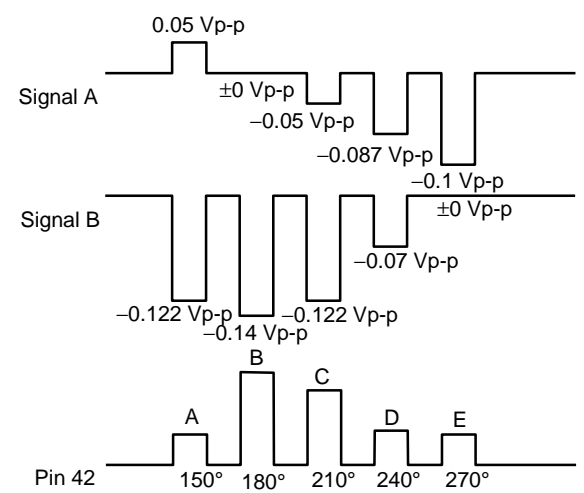

Test Conditions for Color Difference Block 2

Common Test Conditions for Color Difference Block 2


1. SW1 = B, SW2 = B, SW7~SW10 = B, SW20 = ON, SW23 = B
2. Unless otherwise specified, measure each bus data with preset values.
3. Set the following data.

| | |
|-----------------|-----------|
| Subaddress (00) | Data (02) |
| Subaddress (02) | Data (0C) |
| Subaddress (05) | Data (7F) |
| Subaddress (06) | Data (6C) |
| Subaddress (07) | Data (40) |
| Subaddress (0B) | Data (7F) |
| Subaddress (0C) | Data (84) |
| Subaddress (12) | Data (F0) |
| Subaddress (13) | Data (F0) |
| Subaddress (15) | Data (00) |
| Subaddress (18) | Data (00) |
| Subaddress (1A) | Data (C0) |
| Subaddress (1B) | Data (E0) |
| Subaddress (1C) | Data (03) |
| Subaddress (1D) | Data (78) |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---|-----------------|--------------|--------------|------|------|------|------|------|------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| A01 | Color difference contrast adjustment characteristic | C | A or B | A or B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Set brightness to maximum, and subaddress (12) data to (F0). 2. Input signal 3 ($f_0 = 100$ kHz, picture period amplitude = $0.23 V_{p-p}$) from pin 5. 3. Change unicolor data to maximum (7F), center (40), and minimum (00), and measure pin 43 picture period amplitude V_{UCYMAX}, $V_{UCYCENT}$, and V_{UCYMIN} respectively. 4. Determine unicolor amplitude ratio between maximum and minimum in decibels. (ΔV_{UCY}) 5. Repeat the steps 2 to 4 above with the following pins: Input (picture period amplitude $0.2 V_{p-p}$) from pin 4, and measure pin 41. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|--|-----------------|--------------|--------------|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| A02 | Color adjustment characteristic | C | A or B | A or B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Set brightness to maximum, and subaddress (12) data to (F0). 2. Input signal 3 ($f_0 = 100$ kHz, picture period amplitude = $0.115 V_{p-p}$) from pin 5. 3. Change color data to maximum (7F), center (40), and minimum (01), and measure pin 43 picture period amplitudes V_{CCYMAX}, $V_{CCYCENT}$, and V_{CCYMIN} respectively. 4. Calculate amplitude ratios of maximum and minimum against color center in decibels. (ΔV_{CCY}) 5. Repeat the steps 2 to 4 above with the following pins: Input (picture period amplitude $0.1V_{p-p}$) from pin 4 and measure pin 41. |
| A03 | Color difference halftone characteristic | C | A or B | A or B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 3 ($f_0 = 100$ kHz, picture period amplitude $0.2 V_{p-p}$) from pin 5. 2. Measure pin 43 output picture period amplitude v_{HTARY}. 3. Apply 1.5 V to pin 52 from external power supply. 4. Measure pin 43 output picture period amplitude v_{HTBRY}. 5. Calculate $GHT_{RY} = v_{HTBRY}/v_{HTARY}$ 6. Repeat the steps 1 to 5 above and measure pin 42. Calculate $GHT_{GY} = v_{HTBGY}/v_{HTAGY}$ 7. Repeat the steps 1 to 5 above and measure pin 4. Calculate $GHT_{BY} = v_{HTBBY}/v_{HTABY}$. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-------------------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| A04 | Color γ characteristic | C | B | A | A | A | A | A | A | A | <ol style="list-style-type: none"> Input signal 2 from pin 5. Increase signal 2 amplitude A. Determine gamma correction point $V_{\gamma 1}$, $V_{\gamma 2}$, and $V_{\gamma 3}$ of subaddress data (14). Set subaddress (14) data as follows: <ul style="list-style-type: none"> (01) – γOFF (03) – $\gamma 1$ON (05) – $\gamma 2$ON (07) – $\gamma 3$ON Measure #43 output signal amplitude levels and chart a characteristic diagram. Determine V_{γ} where γ starts applying and gradient Δ at γ ON when linearity at γ OFF is 1. |

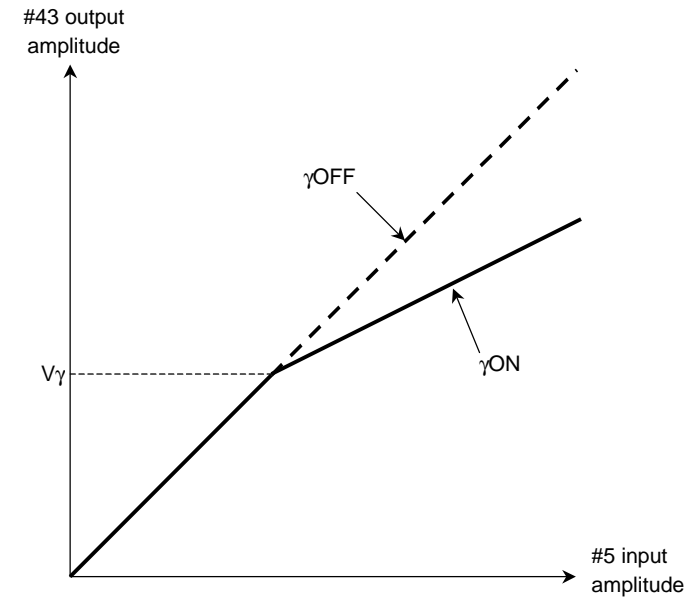

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|------------------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| A05 | Color limiter characteristic | C | B | A | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 2 (picture period amplitude = 0.56 Vp-p) from pin 4. 2. Set subaddress (14) to (00)/(01), and measure pin 43 output signal picture period amplitude, CLT_0/CLT_1. |
| A06 | High-bright color gain | C | B | A | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 2 (picture period amplitude = 0.28 Vp-p) from pin 4. 2. Adjust color so that pin 41 output picture period amplitude is 1.2 Vp-p. 3. Set subaddress (0B) data to (80) and measure pin 41 output signal picture period amplitude v_{41}. 4. Calculate the following equation. $HBC_1 = (1.2 - v_{41})/1.2$ |

Test Conditions for Text Block


Common Test Conditions for Text Block

1. SW1 = B, SW2 = B, SW7~SW10 = B, SW20 = ON, SW23 = B
2. Unless otherwise specified, measure each bus data with preset values.
3. Set the following data.
 - Subaddress (00) Data (02)
 - Subaddress (02) Data (0C)
 - Subaddress (05) Data (7F)
 - Subaddress (06) Data (6C)
 - Subaddress (07) Data (40)
 - Subaddress (0B) Data (7F)
 - Subaddress (0C) Data (84)
 - Subaddress (12) Data (F0)
 - Subaddress (13) Data (F0)
 - Subaddress (15) Data (00)
 - Subaddress (18) Data (00)
 - Subaddress (1A) Data (C0)
 - Subaddress (1B) Data (E0)
 - Subaddress (1C) Data (03)
 - Subaddress (1D) Data (78)

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|--------------------------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T01 | AC gain | A | B | B | A | A | A | A | A | A | 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. 2. Measure pins 41, 42, and 43 picture period amplitude, V_{41} , V_{42} , and V_{43} . 3. Calculate AC gain using the following equations. $G_R = V_{43}/0.2$ $G_G = V_{42}/0.2$ $G_B = V_{41}/0.2$ |
| T02 | Unicolor adjustment characteristic | A | B | B | A | A | A | A | A | A | 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. 2. Change unicolor data to maximum (7F), center (40), and minimum (00) and measure pin 43 picture period amplitude, V_{uMAX} , V_{uCNT} , and V_{uMIN} respectively. 3. Calculate amplitude ratio of V_{uMAX} and V_{uMIN} in decibels (ΔV_u) |
| T03 | Brightness adjustment characteristic | A | B | B | A | A | A | A | A | A | 1. Input signal 2 from pin 3 and adjust pin 43 picture period output amplitude to 1 Vp-p. 2. Change brightness data to maximum (7F), center (80), and minimum (00) and measure pin 43 voltages, V_{brMAX} , V_{brCNT} , and V_{brMIN} respectively. |


| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|--------------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T04 | White peak slice level | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Set subcontrast to maximum. 2. Apply external power supply to pin 3 and gradually increase voltage from 5.8 V. 3. When picture period of pin 43 is clipped, measure pin 43 picture period amplitude voltage, V_{wps1}. 4. Change subaddress (0C) data to (FC) and repeat the steps 1 to 3 above. (V_{wps2}) |
| T05 | Black peak slice level | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Apply external power supply to pin 3 and gradually decrease voltage from 5.8 V. 2. When picture periods are clipped, measure pins 41, 42, and 43 voltage, V_{bps}. |
| T06 | RGB output S/N | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Adjust brightness data so that picture period voltage of pin 41 is 2.4 V. 2. Set color data to minimum. 3. Measure noise levels n_{41}-, n_{42}-, and n_{43}-Vp-p in picture period of pin 41, 42, and 43 with an oscilloscope. 4. Calculate S/N. <ul style="list-style-type: none"> $N_{41} = -20 \times \log [2.3/(0.2 \times n_{41})]$ $N_{42} = -20 \times \log [2.3/(0.2 \times n_{42})]$ $N_{43} = -20 \times \log [2.3/(0.2 \times n_{43})]$ |
| T07 | Half-tone characteristic | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude 0.2 Vp-p) from pin 3. 2. Measure pin 41 picture period amplitude v_{41A}. 3. Apply 1.5 V to pin 52 from external power supply. 4. Measure pin 41 picture period amplitude v_{41B} 5. Calculate the following equation. $G_{HT1} = v_{41B}/v_{41A}$ 6. Stop applying voltage to pin 52. Set subaddress (1A) to data (E2) and measure pin 41-picture period amplitude, v_{41C}. 7. Calculate the following equation. $G_{HT2} = v_{41C}/v_{41A}$ |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|----------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T08 | BLK pulse delay time | C | B | B | A | A | A | A | A | A | 1. Apply signal shown in the figure (A) below to pin 24 (BLK input), and measure t_{dON} and t_{dOFF} of output signals from pins 41, 42, and 43 shown in the figure (B) below. |
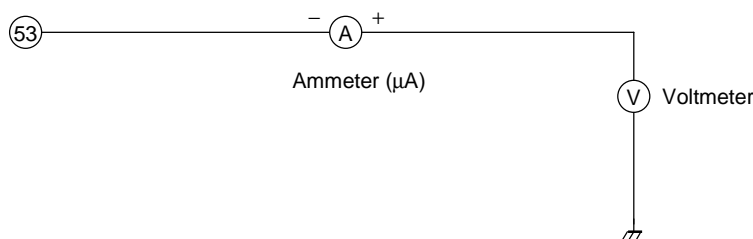
| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---------------------------------|-----------------|-----|-----|------|------|------|------|------|------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T09 | Drive adjustment variable range | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude 0.2 Vp-p) from pin 3. 2. Measure picture period amplitude of pin 42 when subaddress (0D) data is changed to maximum (FE), center (80), and minimum (00). 3. Use picture period amplitude at center as the base. Determine amplitude ratio DR_{G1+} and DR_{G1-} at maximum and minimum in decibels. 4. Repeat the steps 1 to 3 above to measure amplitude ratio of pin 41, DR_{B1+} and DR_{B1-} in decibels when subaddress (0E) data is changed. 5. Repeat the steps 1 to 3 above to measure amplitude ratio of pin 42, DR_{G2+} and DR_{G2-} in decibels when subaddress (0E) center data is set to (81) used as the base. 6. Repeat the steps 1 to 3 above to measure picture period amplitude ratio of pin 41, DR_{B2+} and DR_{B2-} in decibels when subaddress (0E) data is changed to maximum (FF), center (81), and minimum (01). 7. Repeat the steps 1 to 3 above to measure picture period amplitude ratio of pin 43, DR_{R1+} and DR_{R2-} in decibels when subaddress (0D) data is changed to maximum (FF), center (81), and minimum (01). 8. Repeat the steps 1 to 3 above to measure picture period amplitude ratio of pin 41, DR_{B3+} and DR_{B3-} in decibels when subaddress (0D) data is set to (81), and subaddress (0E) data is changed. 9. Repeat the steps 1 to 3 above to measure picture period amplitude ratio of pin 42, DR_{G3+} and DR_{G3-} in decibels when subaddress (0E) data is set to (81), and subaddress (0D) data is changed to maximum (FF), center (81), and minimum (01). 10. Repeat the steps 1 to 3 above to measure picture period amplitude ratio of pin 43, DR_{R2+} and DR_{R2-} in decibels when subaddress (0D) data is set to (81), and subaddress (0E) data is changed to maximum (FF), center (81), and minimum (01). |
| T10 | #53 input impedance | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Connect external power supply, an ammeter, and a voltmeter to pin 53. Adjust voltage so that current value is set to zero. 2. Measure the current when voltage of pin 53 is increased by 0.2V. (I_{in}) 3. Calculate the following equation. $Z_{in53} = 0.2 V / I_{in}$ (Ω)  |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|--------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T11 | ACL characteristic | A | B | B | A | A | A | A | A | A | 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude $0.2 V_{p-p}$) from pin 3. 2. Measure pin 43 picture period amplitude, v_{ACL1} . 3. Apply "DC voltage of pin 53 – 0.8 V" to pin 53 from external power supply and measure pin 43-picture period amplitude, v_{ACL2} . 4. Apply "DC voltage of pin 53 – 1.3 V" to pin 53 from external power supply and measure pin 43-picture period amplitude, v_{ACL3} . 5. Calculate the following equations. $ACL_1 = -20 \times \log (v_{ACL2}/v_{ACL1})$ $ACL_2 = -20 \times \log (v_{ACL3}/v_{ACL1})$ |
| T12 | ABL point | C | B | B | A | A | A | A | A | A | 1. Measure DC voltage of pin 53, V_{ABL1} . 2. Set subaddress (1B) data to (1C). 3. Apply external voltage to pin 53, and decrease voltage from 6.5 V. When voltage of pin 43 starts changing, measure pin 53 voltage, V_{ABL2} . 4. Change subaddress (1B) data to (3C), (5C), (7C), (9C), (BC), (DC), and (FC) under the status of the step 3 above. Measure pin 53 voltage: V_{ABL3} , V_{ABL4} , V_{ABL5} , V_{ABL6} , V_{ABL7} , V_{ABL8} , and V_{ABL9} . 5. $ABL_{P1} = V_{ABL2} - V_{ABL1}$ $ABL_{P5} = V_{ABL6} - V_{ABL1}$ $ABL_{P2} = V_{ABL3} - V_{ABL1}$ $ABL_{P6} = V_{ABL7} - V_{ABL1}$ $ABL_{P3} = V_{ABL4} - V_{ABL1}$ $ABL_{P7} = V_{ABL8} - V_{ABL1}$ $ABL_{P4} = V_{ABL5} - V_{ABL1}$ $ABL_{P8} = V_{ABL9} - V_{ABL1}$ |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-----------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T13 | ABL gain | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Apply 6.5-V external voltage to pin 53. 2. Set subaddress (1B) data to (00). 3. Set brightness data to maximum. 4. Apply 4.5-V external voltage to pin 53. 5. Change subaddress (1B) data to (00), (04), (08), (0C), (10), (14), (18), and (1C). Repeat the step 3 above, and measure VABL11, VABL12, VABL13, VABL14, VABL15, VABL16, VABL17, and VABL18. 6. $ABL_{G1} = VABL11 - VABL10$ $ABL_{G2} = VABL12 - VABL10$ $ABL_{G3} = VABL13 - VABL10$ $ABL_{G4} = VABL14 - VABL10$ $ABL_{G5} = VABL15 - VABL10$ $ABL_{G6} = VABL16 - VABL10$ $ABL_{G7} = VABL17 - VABL10$ $ABL_{G8} = VABL18 - VABL10$ |
| T14 | RGB output mode | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Adjust brightness data so that picture period voltage of pin 43 is 2.4 V. 2. Set subaddress (1B) data to (01). 3. Measure pins 43, 42, and 41 picture period voltage, V_{43R}, V_{42R}, and V_{41R}. 4. Set subaddress (1B) data to (02), and repeat the step 3 above. Measure pins 43, 42, and 41 picture period voltage, V_{43G}, V_{42G}, and V_{41G}. 5. Set subaddress (1B) data to (03), and repeat the step 3 above. Measure pins 43, 42, and 41 picture period voltage, V_{43B}, V_{42B}, and V_{41B}. |
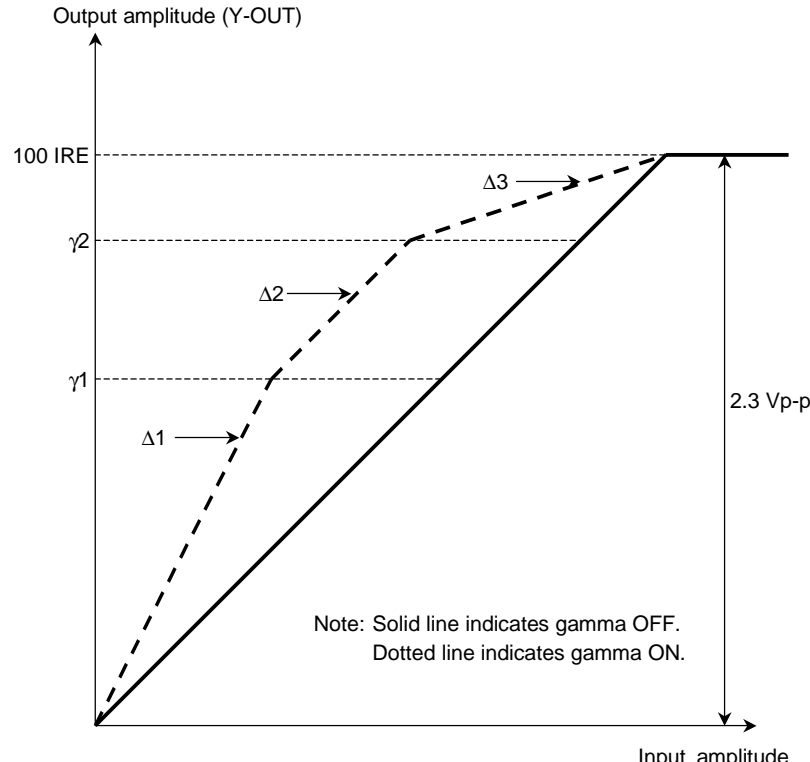
| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-------------------------------|-----------------|-----|-----|------|------|------|------|------|------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T15 | Y-OUT γ characteristic | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> Input RAMP waveform from pin 3. Adjust input amplitude so that picture period amplitude of pin 43 is 2.3 Vp-p. Set subaddress (0C) data to (81). Adjust input amplitude so that picture period amplitude of pin 43 is 2.3 Vp-p. Monitor pin 43. According to the figure below, determine Y-OUT γ correction start points γ_1 and γ_2. Also determine ratios of gradients at Y-OUT ON to Y-OUT OFF in decibel. (Δ_1, Δ_2, and Δ_3)  <p>Note: Solid line indicates gamma OFF. Dotted line indicates gamma ON.</p> |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-------------------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T16 | Whitepeak blue characteristic | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input 0.7-Vp-p RAMP signal from pin 3. 2. Set subcontrast data to maximum. 3. Set subaddress (1F) data to (04). 4. Set subaddress (1E) data to (01), and monitor pin 41. Determine blue stretch start point BS_{Pmin} using the figure below. 5. Repeat the step 4 above by changing subaddress (1E) data to (04) and (07). Determine blue stretch start point BS_{PCNT} and BS_{Pmax}. 6. Set subaddress (1E) data to (04). 7. Monitor pin 41 and calculate ratio of blue stretch ON gradient in relative to blue stretch OFF gradient in decibel (BS_{GCNT}) using the figure below. 8. Repeat the step 7 above by changing subaddress (1F) data to (00) and (07). Calculate gradient ratio in decibel (BS_{Gmin} and BS_{Gmax}). <p>Note: Calculate white-peak blue start point in IRE as setting positive amplitude at pedestal level of output signal to 2.3 Vp-p = 100 IRE.</p> |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T17 | ACB insertion pulse phase and amplitude | A or C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> Input signal 1($f_0 = 100$ kHz, picture period amplitude = $0.2 V_{p-p}$) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. Set brightness data to 108. Measure pins 46, 47, and 48 voltage. Apply measured voltages from external power supply. Set subaddress (02) data to (40). Use output signals from pins 43, 42, and 41, and measure ACB insertion pulse phase as shown in the Figure 1. <p>Note: Take picture period following FBP input fall after $V \cdot BLK$ ends as phase 1H. After next H-BLK, count the phase as 2H, 3H, and so on.</p> <ol style="list-style-type: none"> Monitor pins 43, 42, and 41. Measure ACB insertion pulse amplitudes (level from picture period amplitude at quiescent.): $VACB1R$, $VACB1G$, and $VACB2B$. Set subaddress (02) data to (80), and repeat the step 5 above: $VACB2R$, $VACB2G$, and $VACB2B$. Set subaddress (02) data to (C0), and repeat the step 5 above: $VACB3R$, $VACB3G$, and $VACB3B$. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-----------------------------------|-----------------|-----|-----|--------------|--------------|--------------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T18 | IK input amplitude | A or C | B | B | A | A | A | A | A | A | 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Set subaddress (02) data to (40). 3. Measure voltage amplitude of pin-45 input signal in ACB insertion period. $1H = IK_R$ $2H = IK_G$ $3H = IK_B$ |
| T19 | IK input cover range | C | B | B | A | A | A | A | A | A | 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Set subaddress (02) data to (40). 3. Measure pin 45 DC voltage in V·BLK period. (#45VBLK) 4. Apply the current externally to pin 45. 5. Measure DC voltage of pin 45 in V·BLK period when pin-43 picture period voltage begins to be decreased. (#45VBLK+) 6. Apply current outward from pin 45. 7. Measure DC voltage of pin 45 in V·BLK period when pin-43 picture period voltage begins to be increased. (#45VBLK-) 8. $DIK_{in+} = (\#45VBLK+) - (\#45VBLK)$ $DIK_{in-} = (\#45VBLK-) + (\#45VBLK)$ |
| T20 | Analog RGB gain | A | B | B | A or B | A or B | A or B | A | A | A | 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pin 49. 3. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 35. 4. Measure pin 43 picture period amplitude, v43R. 5. Repeat the steps 3 and 4 above with the following pins: Input from pin 34, and measure output from pin 42 (v42G). Input from pin 33, and measure output from pin 41 (v41B). 6. Calculate the following equations. $GTXR = v43R/0.2$ $GTXG = v42G/0.2$ $GTXB = v41B/0.2$ |
| T21 | Analog RGB white peak slice level | A | B | B | A | A | A | A | A | A | 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pin 49. 3. Set RGB contrast data to maximum (7F). 4. Input signal 2 to pin 35. Gradually increase picture amplitude, and measure picture period amplitude voltage when output from pin 43 is clipped. 5. Repeat the steps 3 and 4 above with following pins: Input from pin 34 and measure output from pin 42. Input from pin 33 and measure output pin 41. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---|-----------------|-----|-----|--------------|--------------|--------------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T22 | Analog RGB black peak limit level | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pin 49. 3. Set RGB contrast data to maximum (7F). 4. Input signal 2 to pin 35. Gradually decrease picture amplitude, and measure picture period amplitude voltage when output from pin 43 is clipped. 5. Repeat the step 4 above with the following pins: Input from pin 34 and measure output from pin 42. Input from pin 33 and measure output pin 41. |
| T23 | RGB contrast adjustment characteristic | A | B | B | A or B | A or B | A or B | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pin 49. 3. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 35. 4. RGB contrast data to maximum (7F), center (40), and minimum (00). Measure pin 43 picture period amplitudes V_{UTXR} (maximum, center, and minimum) respectively. 5. Calculate amplitude ratio of maximum and minimum in decibels. 6. Repeat the steps 4 and 5 above with the following pins: Input from pin 34 and measure pin 42. Input from pin 33 and measure pin 41. |
| T24 | Analog RGB brightness adjustment characteristic | A | B | B | A or B | A or B | A or B | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Input signal 2 from pins 33, 34, and 35. 3. Apply 5-V external voltage to pin 49. 4. Adjust amplitude A of signal 2 so that picture period amplitude of pin 43 is 0.5 Vp-p. 5. Change RGB brightness data to maximum (FE), center (80), and minimum (00). Measure pins 43, 42, and 41 picture period voltage V_{bTX} (maximum, center, and minimum) respectively. |
| T25 | Analog RGB mode switching transfer characteristic | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Set RGB brightness data to maximum (FE). 2. Input signal 4 (signal amplitude = 1.5 Vp-p) from pin 49. 3. Measure input/output transfer characteristics using pin 43 according to the figure T-2. 4. Repeat the steps 2 and 3 above with the following pins: Input from pin 34 and measure pin 42. Input from pin 33 and measure pin 41. 5. Calculate maximum inter-axial rise/fall transfer delay time, using the data measured above. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---|-----------------|-----|-----|------|------|------|--------|--------|--------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T26 | Text ACL characteristic | A | B | B | A | A | B | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pin 49. 3. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 35. 4. Measure pin 43 picture period amplitude, vTXACL1. 5. Apply "pin 53 DC voltage – 0.8 V" to pin 53 from external power supply, and measure pin 43-picture period amplitude, vTXACL2. 6. Apply "pin 53 DC voltage – 1.3 V" to pin 53 from external power supply, and measure pin 43-picture period amplitude, vTXACL3. 7. $TXACL_1 = -20 \times \log (vTXACL2/vTXACL1)$ $TXACL_2 = -20 \times \log (vTXACL3/vTXACL1)$ |
| T27 | Analog OSD gain | A | B | B | A | A | A | A or B | A or B | A or B | <ol style="list-style-type: none"> 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pins 50 and 51. 3. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 39. 4. Measure pin 43 picture period amplitude, v43R. 5. Repeat the steps 3 and 4 above with the following pins: Input from pin 38, and measure pin 42. Input from pin 37 and measure pin 41. (v42G and v41B) 6. Calculate the following equations. $GOSDR = v43R/0.2$ $GOSDG = v42G/0.2$ $GOSDB = v41B/0.2$ |
| T28 | Analog OSD input white peak slice level | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pins 50 and 51. 3. Input signal 2 from pin 39. Gradually increase picture amplitude, and measure picture period amplitude voltage when output from pin 43 is clipped. 4. Repeat the step 3 above with the following pins: Input from pin 38, and measure pin 42. Input from pin 37, and measure pin 41. |
| T29 | Analog OSD black peak limit level | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Apply 5-V external voltage to pins 50 and 51. 3. Input signal 2 from pin 39. Gradually decrease picture amplitude, and measure picture period amplitude voltage when output from pin 43 is clipped. 4. Repeat the step 3 above with the following pins: Input from pin 38, and measure pin 42. Input from pin 37, and measure pin 41. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---|-----------------|-----|-----|------|------|------|--------|--------|--------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T30 | OSD contrast adjustment characteristic | A | B | B | A | A | A | A or B | A or B | A or B | <ol style="list-style-type: none"> Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. Apply 5-V external voltage to pins 50 and 51. Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 39. Change OSD contrast data to (11), (10), (01), and (00). Measure pin 43 picture period amplitude V_{uOSDR} (11), (10), (01), and (00) respectively. Repeat the steps 3 and 4 above with the following pins: Input from pin 38, and measure pin 42, V_{uOSDG} (11), (10), (01), and (00). Input from pin 37, and measure pin 41, V_{uOSDB} (11), (10), (01), and (00). |
| T31 | Analog OSD brightness adjustment characteristic | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> Input signal 1($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. Apply 5-V external voltage to pins 50 and 51. Change OSD brightness data (subaddress 1D) to (38), (78), (B8), and (F8), and measure picture period voltage of pins 43, 42, and 41 respectively. <ul style="list-style-type: none"> Data (38) = V_{brOSD0} Data (78) = V_{brOSD1} Data (B8) = V_{brOSD2} Data (F8) = V_{brOSD3} |
| T32 | Analog OSD mode switching transfer characteristic | C | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> Set OSD brightness data to maximum (11). Input signal 4 (signal amplitude = 4.5 Vp-p) from pin 50. Measure input/output transfer characteristics using pin 43 according to the figure T-2. Repeat the steps 2 and 3 above, and measure pins 42 and 41. Calculate maximum inter-axial rise/fall transfer delay time, using the data measured above. Repeat the steps 1 to 5 above with the following pin. Input signal 4 (signal amplitude 4.5 Vp-p) from pin 51. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|------------------------|-----------------|-----|-----|------|------|------|------|------|------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T33 | OSD ACL characteristic | A | B | B | A | A | A | A | A | B | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. Control drive gain adjustment data so that pins 41 and 42 picture period amplitude equals that of pin 43. 2. Set subaddress (07) data to (01). 3. Apply 5-V external voltage to pins 50 and 51. 4. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 39. 5. Measure pin 43 picture period amplitude, vOSDACL1. 6. Apply "pin 53 DC voltage – 0.8 V" to pin 53 from external power supply, and measure pin 43-picture period amplitude, vOSDACL2. 7. Apply "pin 53 DC voltage – 1.3 V" to pin 53 from external power supply, and measure pin 43-picture period amplitude, vOSDACL3. 8. $OSDACL_1 = -20 \times \log (vOSDACL2/vOSDACL1)$ $OSDACL_2 = -20 \times \log (vOSDACL3/vOSDACL1)$ 9. OSDACL3、 OSDACL4 Change subaddress (07) data to (80), and repeat the steps 6 to 8 above to measure OSDACL3 and OSDACL4. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-----------------------------|-----------------|-----|-----|------|------|------|-------------|-------------|-------------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T34 | OSD blending characteristic | A ↓ C | B | B | A | A | A | A ↓ B | A ↓ B | B ↓ B | <ol style="list-style-type: none"> 1. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pin 3. 2. Measure pins 41, 42, and 43 picture period amplitude, v41a, v42a, and v43a. 3. Apply 5-V external voltage to pin 51. 4. Measure pins 41, 42, and 43 picture period amplitude, v41b, v42b, and v43b. 5. Calculate v41b amplitude in relation to v41a, v42b amplitude in relation to v42a, and v43b amplitude in relation to v43a in decibel: α_{41TV1}, α_{42TV1}, and α_{43TV1}. 6. Apply 5-V external voltage to pin 50, and repeat the steps 3 to 5 above: α_{41TV2}, α_{42TV2}, and α_{43TV2}. 7. Apply 5-V external voltage to pins 50 and 51, and repeat the steps 3 to 5 above: α_{41TV3}, α_{42TV3}, and α_{43TV3}. 8. Set SW3 to C. Set SW37, 38, and 39 to B. 9. Input signal 1 ($f_0 = 100$ kHz, picture period amplitude = 0.2 Vp-p) from pins 37, 38, and 39. 10. Apply 5-V external voltage to pins 50 and 51. 11. Measure pins 41, 42, and 43 picture period amplitude, v41c, v42c, and v43c. 12. Apply 5-V external voltage to pin 50. 13. Measure pins 41, 42, and 43 picture period amplitude, v41d, v42d, and v43d. 14. Calculate v41d amplitude in relation to v41c, v42d amplitude in relation to v42c, and v43d amplitude in relation to v43c in decibel: α_{41OSD1}, α_{42OSD1}, and α_{43OSD1}. 15. Apply 5-V external voltage to pin 51, and repeat the steps 12 to 14 above: α_{41OSD2}, α_{42OSD2}, and α_{43OSD2}. 16. Apply 5-V external voltage to pins 50 and 51, and repeat the steps 12 to 14 above: α_{41OSD3}, α_{42OSD3}, and α_{43OSD3}. |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-------------------------|-----------------|-----|-----|------|------|------|------|------|------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T35 | Blue stretch point/gain | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input RAMP signal 0.7 Vp-p from pin 3. 2. Set subcontrast data to maximum. 3. Set subaddress (15) data to (0C). 4. Set subaddress (1A) data to (C0), monitor pin 41, and measure blue stretch start point using the figure below (BLP_{min}). 5. Set subaddress (1A) data to (CC), and repeat the step 4 above. (BLP_{max}) 6. Set subaddress (1A) data to (C4). 7. Monitor pin 41 and measure gradient at blue stretch ON in decibel in relation to the one at blue stretch OFF according to the figure below. (BLG_{max}) 8. Set subaddress (15) data to (04), and repeat the step 7 above. (BLG_{min}) <p>Note: Calculate blue stretch start point in IRE as setting positive amplitude at pedestal level of output signal to 2.3 Vp-p = 100 IRE.</p> |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|-------------------------------|-----------------|-----|-----|------|------|------|------|------|------|---|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T36 | Blue stretch gamma correction | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> 1. Input RAMP signal 0.7 Vp-p from pin 3. 2. Set subcontrast data to maximum. 3. Set subaddress (15) data to (08). 4. Set subaddress (09) data to (81). 5. Monitor pin 41 and measure amplitude of the intersection point of blue stretch γ OFF and blue stretch γ ON according to the figure below. Calculate pin 41 output amplitude in IRE as setting positive amplitude at pedestal level of output signal to 2.3 Vp-p = 100 IRE. 6. Set subaddress (1A) data to (C4), (C8), and (CC). Repeat the step 5 above. (BLγ2, BLγ3, and BLγ4) |

| Note No. | Characteristics | Test Conditions | | | | | | | | | Test Method |
|----------|---------------------------|-----------------|-----|-----|------|------|------|------|------|------|--|
| | | SW Mode | | | | | | | | | |
| | | SW3 | SW4 | SW5 | SW33 | SW34 | SW35 | SW37 | SW38 | SW39 | |
| T37 | White letters improvement | A | B | B | A | A | A | A | A | A | <ol style="list-style-type: none"> Apply a pulse to pin 3 as shown in Figure A. Monitor # 43 output waveform. Plot # 43 output amplitude when changing # 3 input signal amplitude from 0 to 120 IRE (0.857 Vp-p) (See Figure B below). Set subaddress (19) data to (80). Monitor # 43 output waveform. Plot # 43 output amplitude when changing # 3 input signal amplitude from 0 to 120 IRE (0.857 Vp-p). Then, compare to the plot in the step 2, calculate a point where a gradient changes (WPL1). Repeat the step 4 above by changing subaddress (19) data to (83) and (86). Calculate points where gradients change (WPL2, WPL3). |

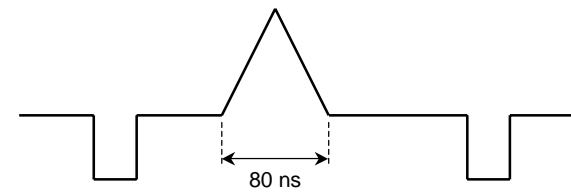


Figure A

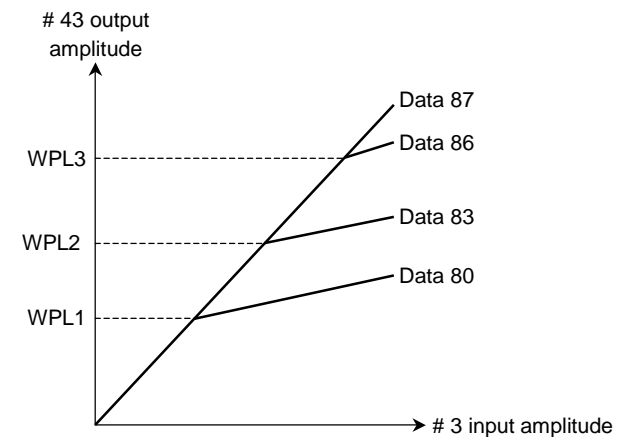
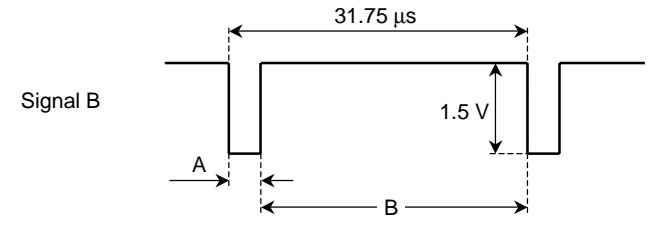
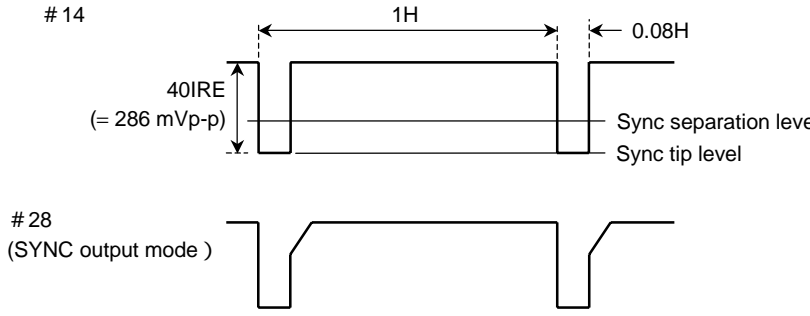




Figure B



Test Condition for Synchronization Block



Common Test Conditions for Synchronization Block: unless otherwise specified, $V_{CC} = 9\text{ V}$, $T_a = 25^\circ\text{C}$, bus data; preset value, SW3 = A, SW14 = A, SW INPUT = B, SW20 = ON, SW22 = OPEN, SW23 = B, SW24a = B, SW24b = OPEN, SW26 = B


| Note | Characteristics | Test Conditions |
|------|----------------------------------|---|
| HA01 | Sync input horizontal sync phase | <ol style="list-style-type: none"> Input signal A (as shown in the figure below) to TPA. Set subaddress (00) data to 82H. Monitor # 14 (Sync input) and #20 (AFC filter) waveforms. Measure phase difference (S_{PH}). |
| HA02 | HD input horizontal sync phase | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (as shown in the figure below) to TP 16. Monitor # 16 (Sync input) and #20 (AFC filter) waveforms. Measure phase difference (HD_{PH}). |



| Note | Characteristics | Test Conditions |
|------|--------------------------------|--|
| HA03 | Polarity detection range | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (as shown in the figure below) to TP16 pin. Decrease signal B duty from 10% (to shorter negative polarity period) and measure signal B duty (HD_{DUTY1}) when #16 input signal phase no longer locks with that of #26 (H-OUT). Increase signal B duty from 10% (to longer negative polarity period) and measure signal B duty (HD_{DUTY2}) when #24 (FBP input) phase changes in relation to signal B. Further increase signal B duty (to longer negative polarity period) and measure signal B duty (HD_{DUTY3}) when #16 input signal phase no longer locks with that of #26 (H-OUT). Decrease signal B duty from 90 % (to shorter negative polarity period) and measure signal B duty (HD_{DUTY4}) when #24 (FBP input) phase changes in relation to signal B.  <p>Duty = $A/B \times 100\%$ (0 to 100%)</p> |
| HA04 | Sync input threshold amplitude | <ol style="list-style-type: none"> Set subaddress (00) data to 82H, and TEST mode to 01. Connect variable power supply to #14 via 20-kΩ resistor. Set variable power supply voltage to 0 V, and measure #14 voltage. (SYNC_TIP_00) Also check that #28 voltage is set to Low (GND level). Increase variable power supply voltage so that #28 voltage becomes High (VCC level). Measure #14 voltage. (SYNC_OFF_00) Calculate the following equation to determine SYNC input separation level at SYNC separation level is 00. $V_{thS00} = (SYNC_OFF_00 - SYNC_TIP_00)/0.286 \times 100$ Change SYNC separation level to 01, 10, and 11. Calculate following equations to determine V_{thS01}, V_{thS10}, and V_{thS11}. $V_{thS01} = (SYNC_OFF_01 - SYNC_TIP_01)/0.286 \times 100$ $V_{thS10} = (SYNC_OFF_10 - SYNC_TIP_10)/0.286 \times 100$ $V_{thS11} = (SYNC_OFF_11 - SYNC_TIP_11)/0.286 \times 100$  |

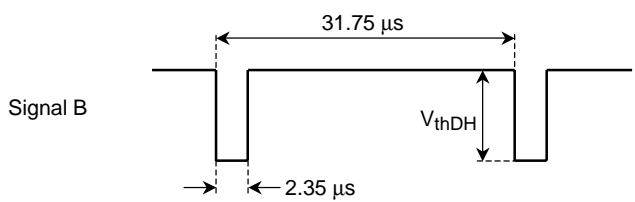
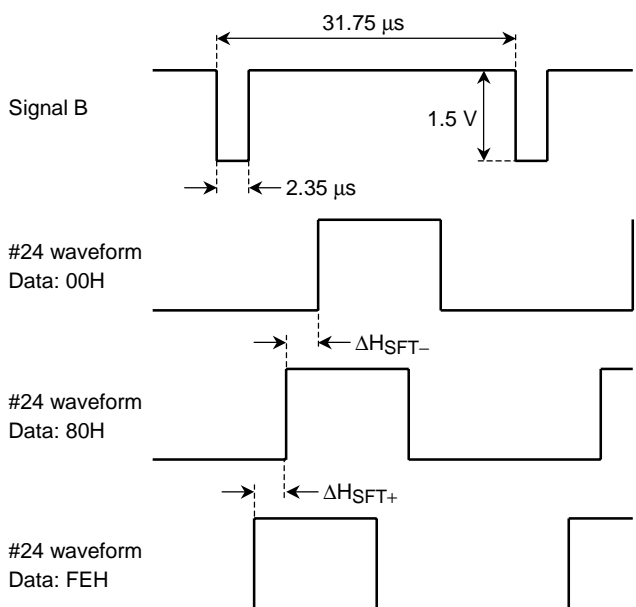
| Note | Characteristics | Test Conditions |
|------|--|--|
| HA05 | HD input threshold amplitude | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (as shown in the figure below) to TP 16. Increase signal B amplitude from 0 V_{p-p}. When #26 (H-OUT) phase locks with that of signal B, measure signal B amplitude V_{thDH}.  |
| HA06 | Horizontal picture phase adjustment variable range | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (the figure is shown below) to TP16. Change subaddress (01) data from 80H to 00H, and measure phase change amount ΔH_{SFT-} of #24 (H-OUT) waveform. Change slave address (01) data from 80H to FEH, and measure phase change amount ΔH_{SFT+} of #24 (H-OUT) waveform.  |
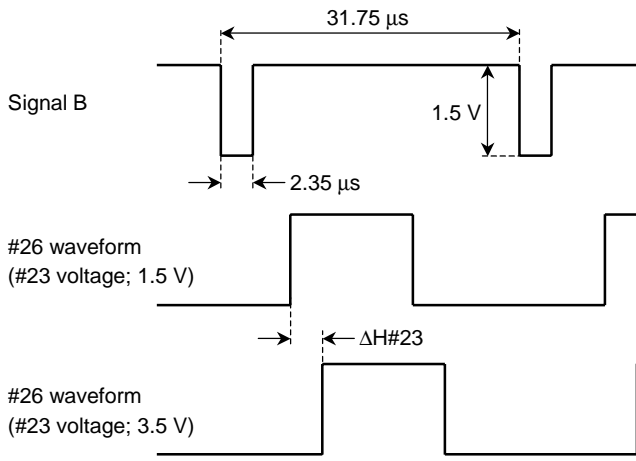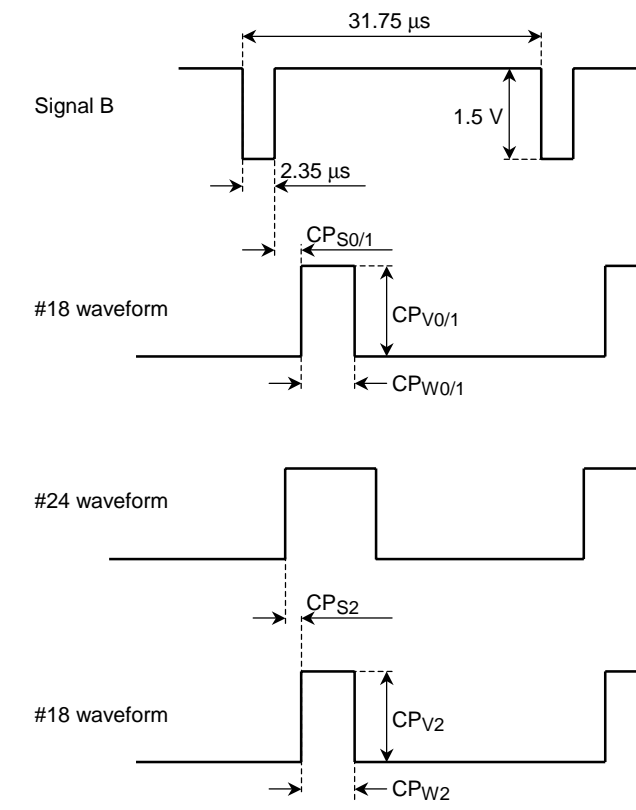
| Note | Characteristics | Test Conditions |
|------|------------------------------------|--|
| HA07 | Curve correction amount | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (as shown in the figure below) to TP16. Connect external voltage to #23 (curve correction), and measure phase change amount ($\Delta H\#23$) of #26 (H-OUT) output waveform at 1.5 V and 3.5 V.  |
| HA08 | Clamp pulse phase, width and level | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (as shown in the figure below) to TP16. Measure #18 (SCP output) clamp pulse phase (CP_{S0}), width (CP_{W0}), and output level (CP_{V0}) in relation to signal B. Set subaddress (01) data to 81H, and repeat the step 3 above to measure (CP_{S1}), (CP_{W1}), and (CP_{V1}). Apply no signal input to TP16. Measure #18 clamp pulse phase (CP_{S2}), width (CP_{W2}), and output level (CP_{V2}) in relation to #24.  |
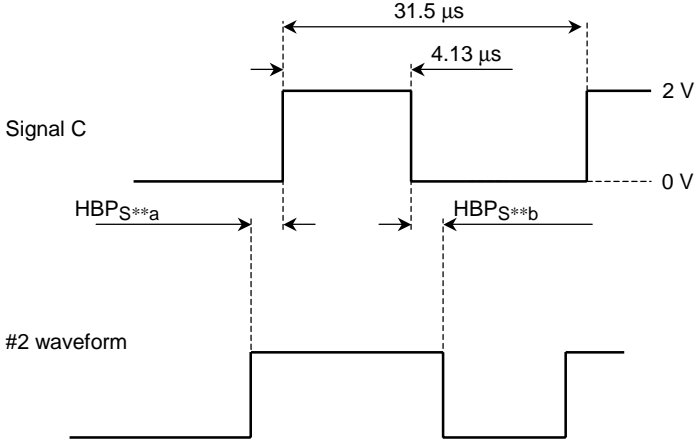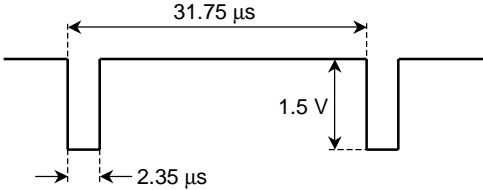
| Note | Characteristics | Test Conditions |
|------|--|---|
| HA09 | Black peak detection pulse phase and level | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Set SW2 to C, SW3 to C, and SW24A to OPEN Input signal C (as the figure shown below) to #24 (FBP input). Measure #2 (BPH filter) black peak detection pulse phase (HBP_{S00a} and HBP_{S00b}) in relation to signal C. Set HBP-PHS 1/2 to (01), (10), and (11). Measure black peak detection pulse phase.  |
| HA10 | FBP input threshold | <ol style="list-style-type: none"> Set subaddress (00) data to 40H. Input signal B (as shown in the figure below) to TP16. Increase amplitude of FBP signal to be input to #24 (FBP input) from 0 Vp-p. When #26 (H-OUT) phase locks with that of signal B, measure #24 input amplitude V_{thFBP}.  |
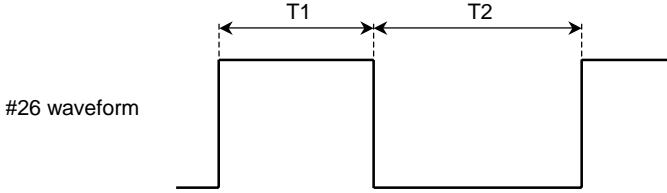
| Note | Characteristics | Test Conditions |
|------|---|---|
| HB01 | H-OUT pulse duty | <ol style="list-style-type: none"> No signal input. Measure T1 and T2 (as shown in the figure below) from #26 (H-OUT) output waveform when subaddress (00) data is 80H and A0H. Calculate duties (TH_A and TH_B) using the following equation: $TH = T1 / (T1 + T2) \times 100 \%$  <p>The diagram shows a square wave pulse labeled '#26 waveform'. The pulse width is marked as T1, and the time from the start of the pulse to the start of the next pulse is marked as T2. Dashed vertical lines indicate the measurement points for T1 and T2.</p> |
| HB02 | Horizontal free-run frequency | <ol style="list-style-type: none"> Set SW20 to open. Set subaddress (00) data to 01H and measure horizontal free-run frequency (F15K) according to #26 (H-OUT) output waveform. Set subaddress (00) data to 00H, 41H, 81H, C0H, and C1H. Measure horizontal free-run frequency F28K, F31K, F33K, F37K, and F45K as in the step 2 above. |
| HB03 | Horizontal oscillation frequency variable range | <ol style="list-style-type: none"> Set subaddress (00) data to 01H. Connect 10-kΩ resistor between #20 and V_{CC}. Measure horizontal frequency (F15K_{MIN}) according to #26 (H-OUT) output waveform. Connect 68-kΩ resistor between #20 and GND. Measure horizontal frequency (F15K_{MAX}) according to #26 (H-OUT) output waveform. Set subaddress (00) data to 00H, 41H, 81H, C0H, and C1H. Repeat the steps 2 and 3 above and measure horizontal frequencies F28K_{MIN}, F28K_{MAX}, F31K_{MIN}, F31K_{MAX}, F33K_{MIN}, F33K_{MAX}, F37K_{MIN}, F37K_{MAX}, F45K_{MIN}, and F45K_{MAX}. |
| HB04 | Horizontal oscillation control sensitivity | <ol style="list-style-type: none"> Set SW20 to open. Connect external power supply to TP 20, and set subaddress (00) data to 01H. Apply V₂₀ + 0.05 V, and V₂₀ - 0.05 V to TP 20. Measure frequencies FA and FB according to #26 (H-OUT) output waveform. Calculate frequency change rate (BH15K) using the following equation. $BH15K = (FB - FA) / 0.1$ Set subaddress (00) data to 00H, 41H, 81H, C0H, and C1H. Repeat the step 2 above, and measure frequency change rate BH28K, BH31K, BH33K, BH37K, and BH45K |
| HB05 | H-OUT output voltage | <ol style="list-style-type: none"> Set SW26 to open. Measure voltage at High (V26_H) and Low (V26_L) of #26 (H-OUT) output waveform. |
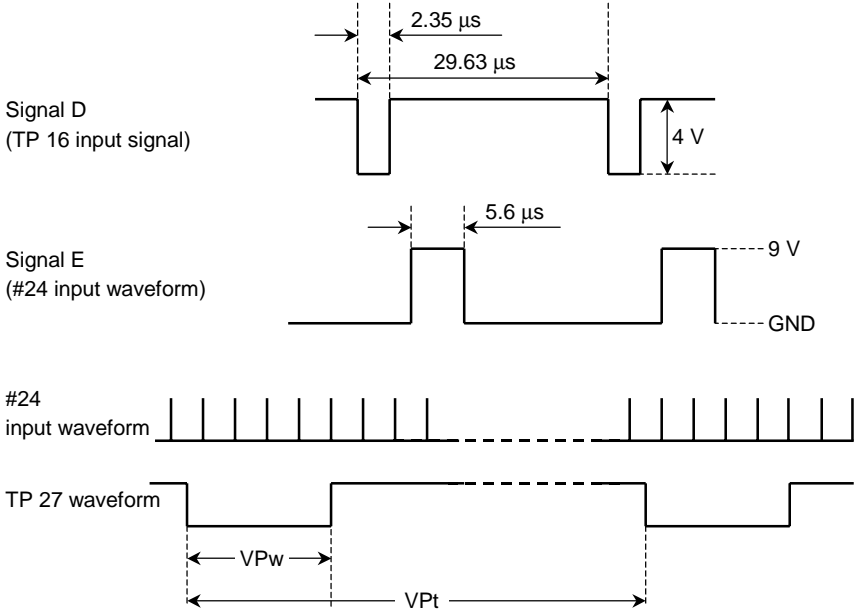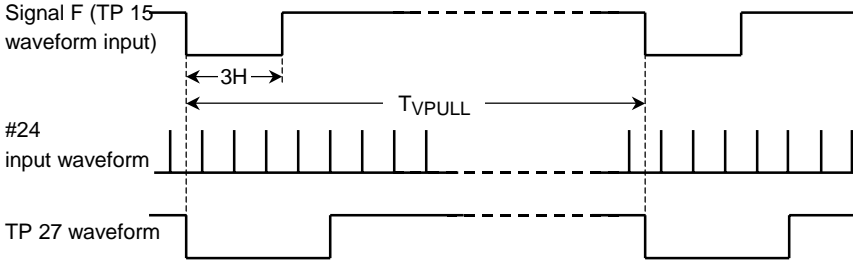
| Note | Characteristics | Test Conditions |
|------|--|---|
| V01 | VP output pulse width, Vertical free-run (maximum pull-in range) | <ol style="list-style-type: none"> Input signal D (shown in the figure below) to TP 16, and signal E (shown in the figure below) to #24 (FBP input). Measure VP output pulse width (VPw) according to TP 27 output waveform. Measure VP pull-in range (VPt0) according to TP 27 output waveform. Set subaddress (03) data to 01H, 02H, 03H, 04H, 05H, and 06H. Measure pull-in range VPt1, VPt2, VPt3, VPt4, VPt5, and VPt6 as in the step 3 above.  |
| V02 | Vertical minimum pull-in range | <ol style="list-style-type: none"> Repeat the step 1 of Note# V01. Input signal F (shown in the figure below) to TP 15. Increase signal-F cycle from 30H. Measure the cycle (T_{VPULL}) when phase locks with that of TP 27.  |
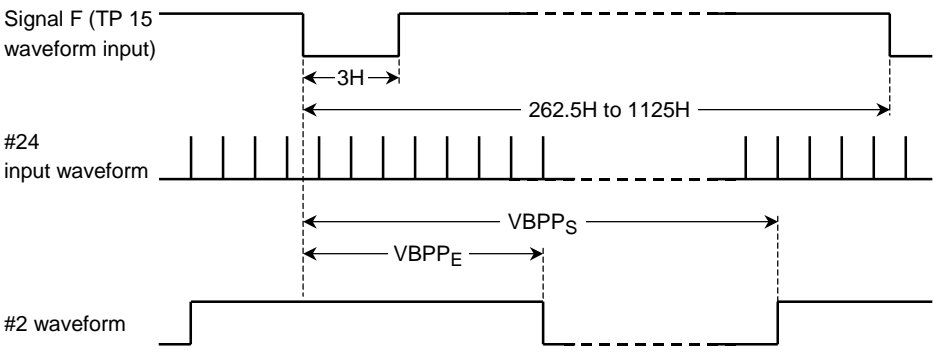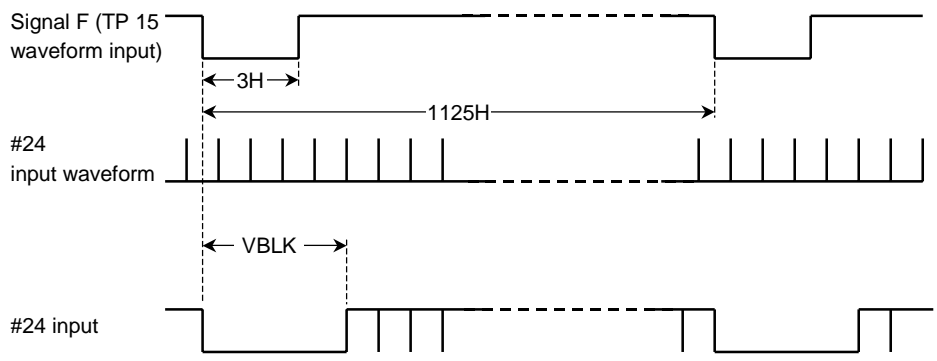
| Note | Characteristics | Test Conditions |
|------|-------------------------------------|---|
| V03 | Vertical black peak detection pulse | <p>1. Repeat the step 1 of Note# V01. Set SW2 to C, and SW3 to C.</p> <p>2. Input signal F (shown in the figure below) to TP 15.</p> <p>3. Measure phase differences VBPP_{0E} and VBPP_{0S} according to #2 output waveform.</p> <p>4. Set subaddress (03) data to 01H, 02H, 03H, 04H, 05H, and 06H. Measure phase differences VBPP_{1E}, VBPP_{1S}, VBPP_{2E}, VBPP_{2S}, VBPP_{3E}, VBPP_{3S}, VBPP_{4E}, VBPP_{4S}, VBPP_{5E}, VBPP_{5S}, VBPP_{6E}, and VBPP_{6S} as in the step 3 above.</p>  |
| V04 | Vertical blanking stop phase | <p>1. Repeat the step 1 of Note# V01.</p> <p>2. Input signal F (shown in the figure below) to TP 15.</p> <p>3. Set subaddress (03) data to 00H and F0H. Measure blanking stop phase VBLK_{MIN} and VBLK_{MAX} according to #43 output waveform.</p>  |

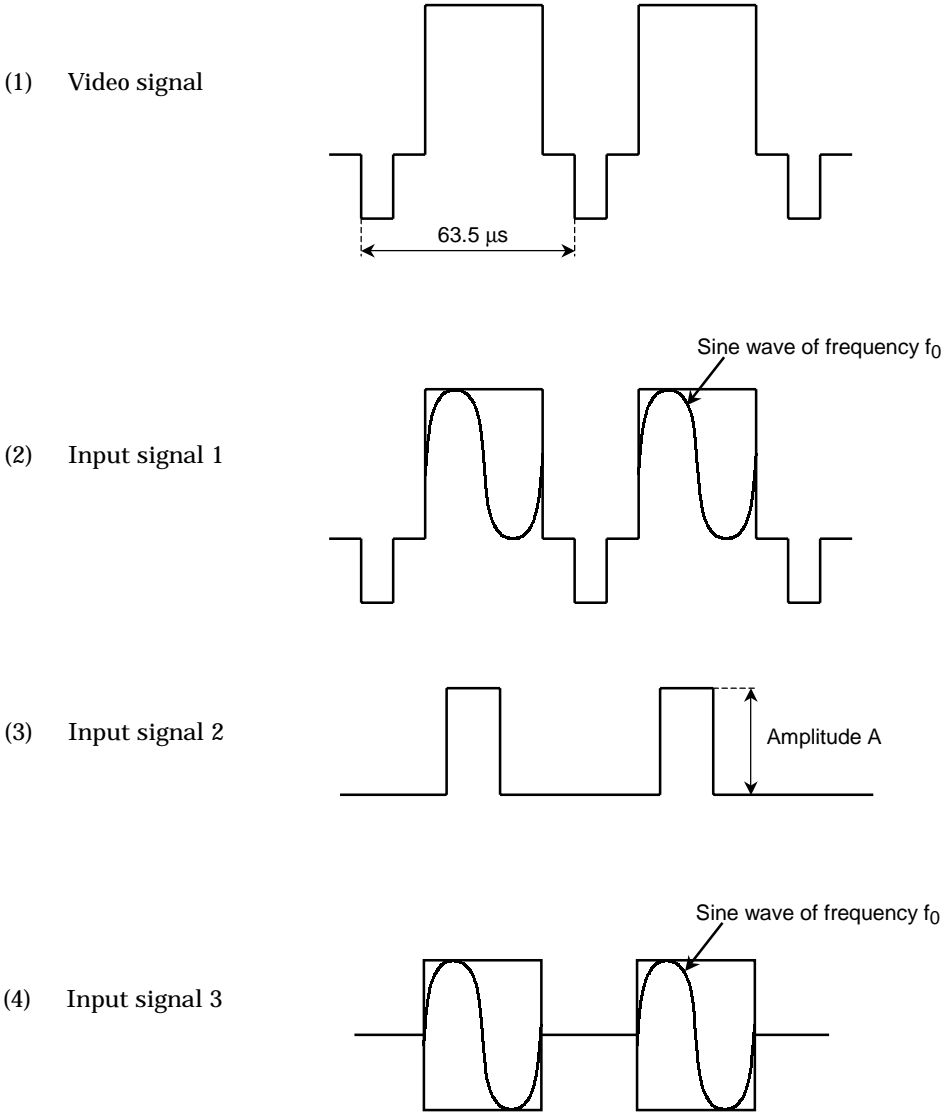


Figure T-1 Signals for Text/Color Difference Signal 2



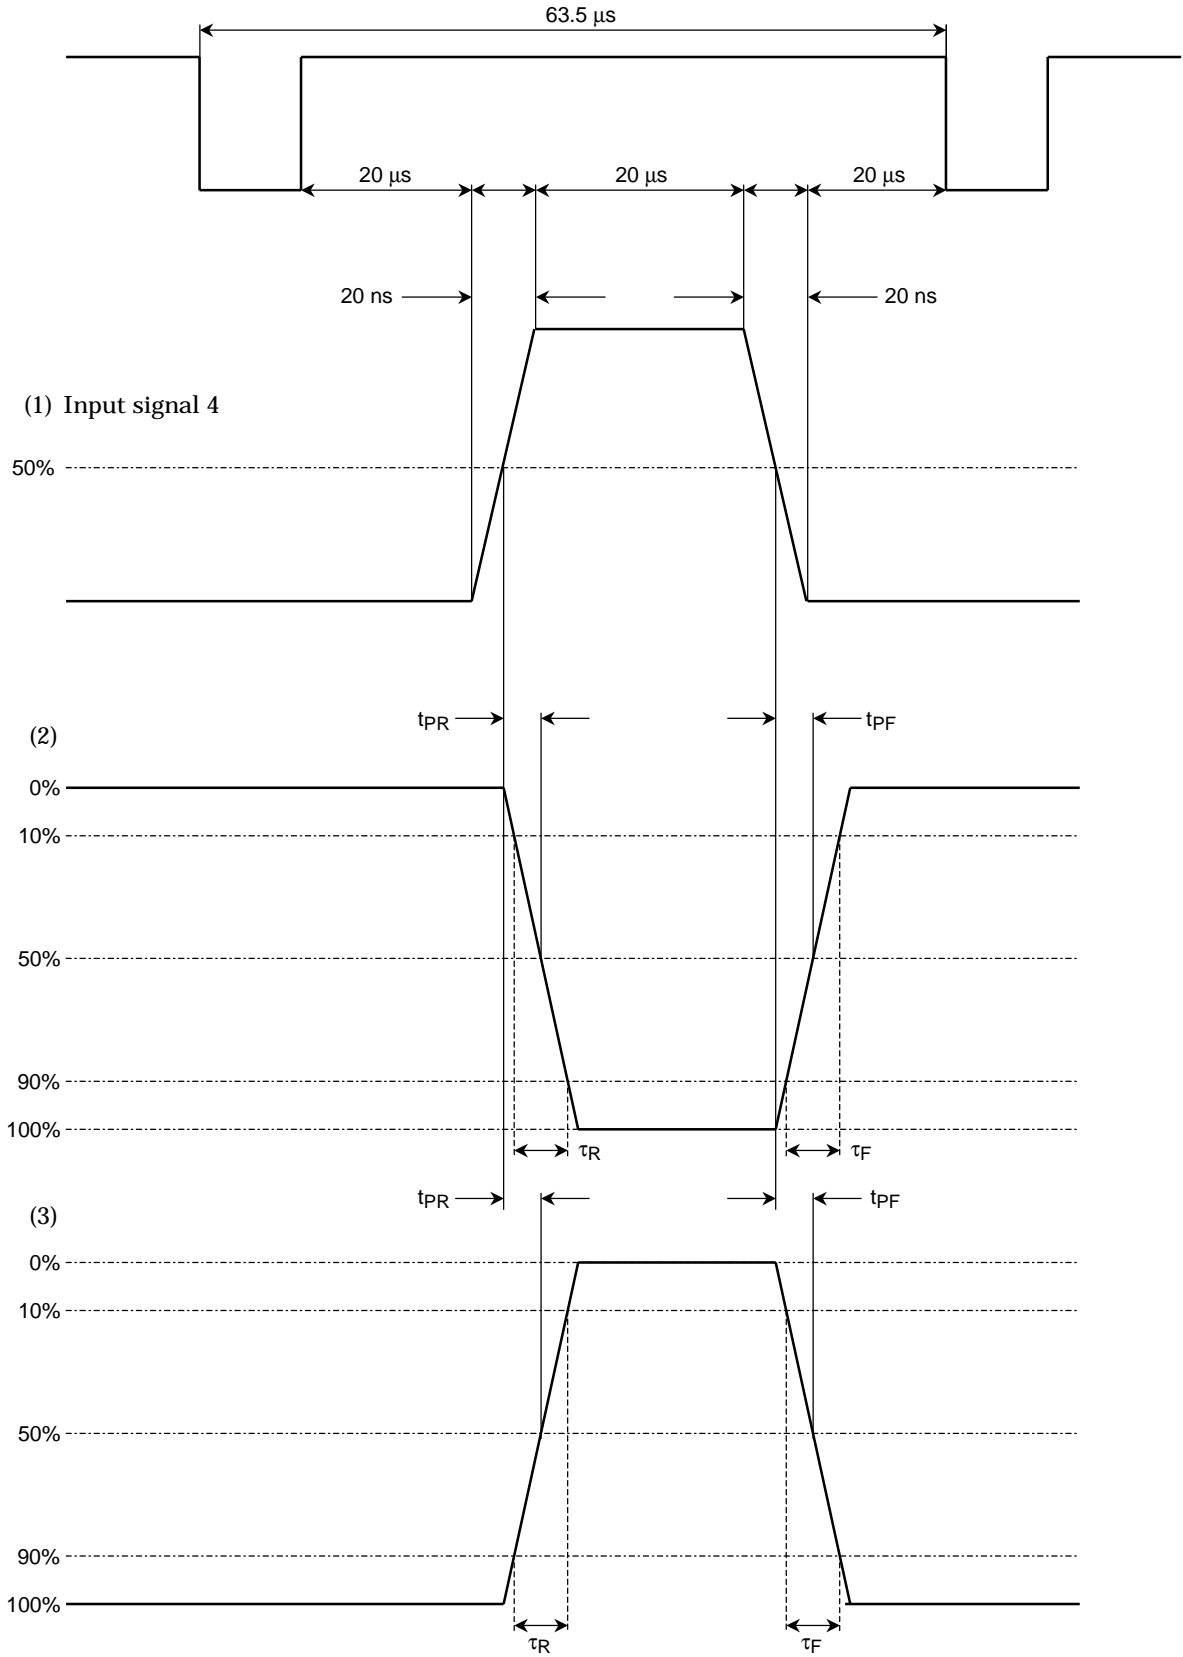


Figure T-2 Test Pulses for Text/Color Difference Signal 2

Test Circuit

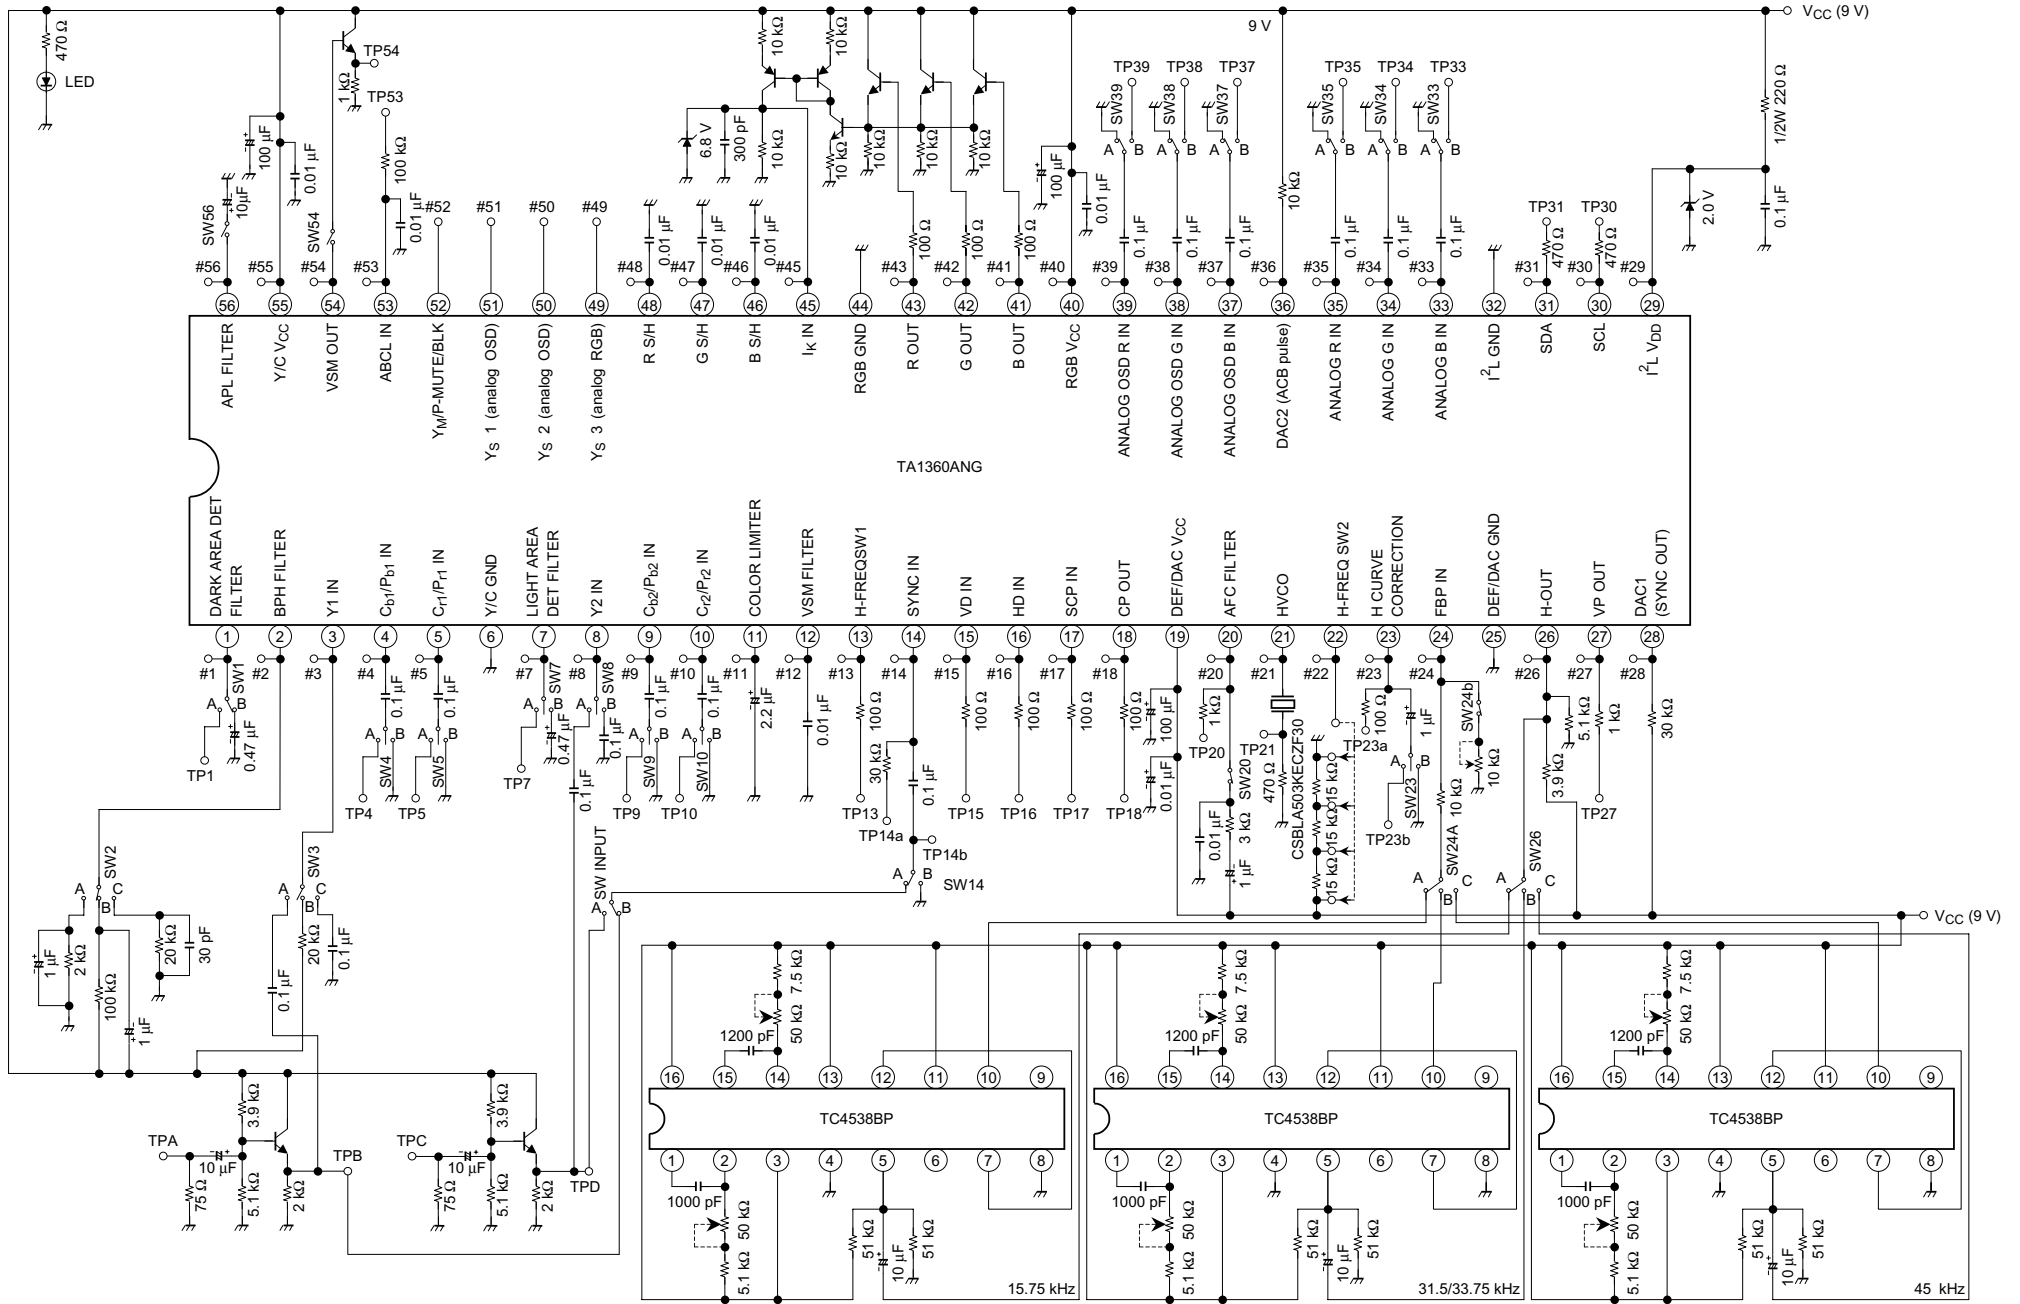

Application Circuit

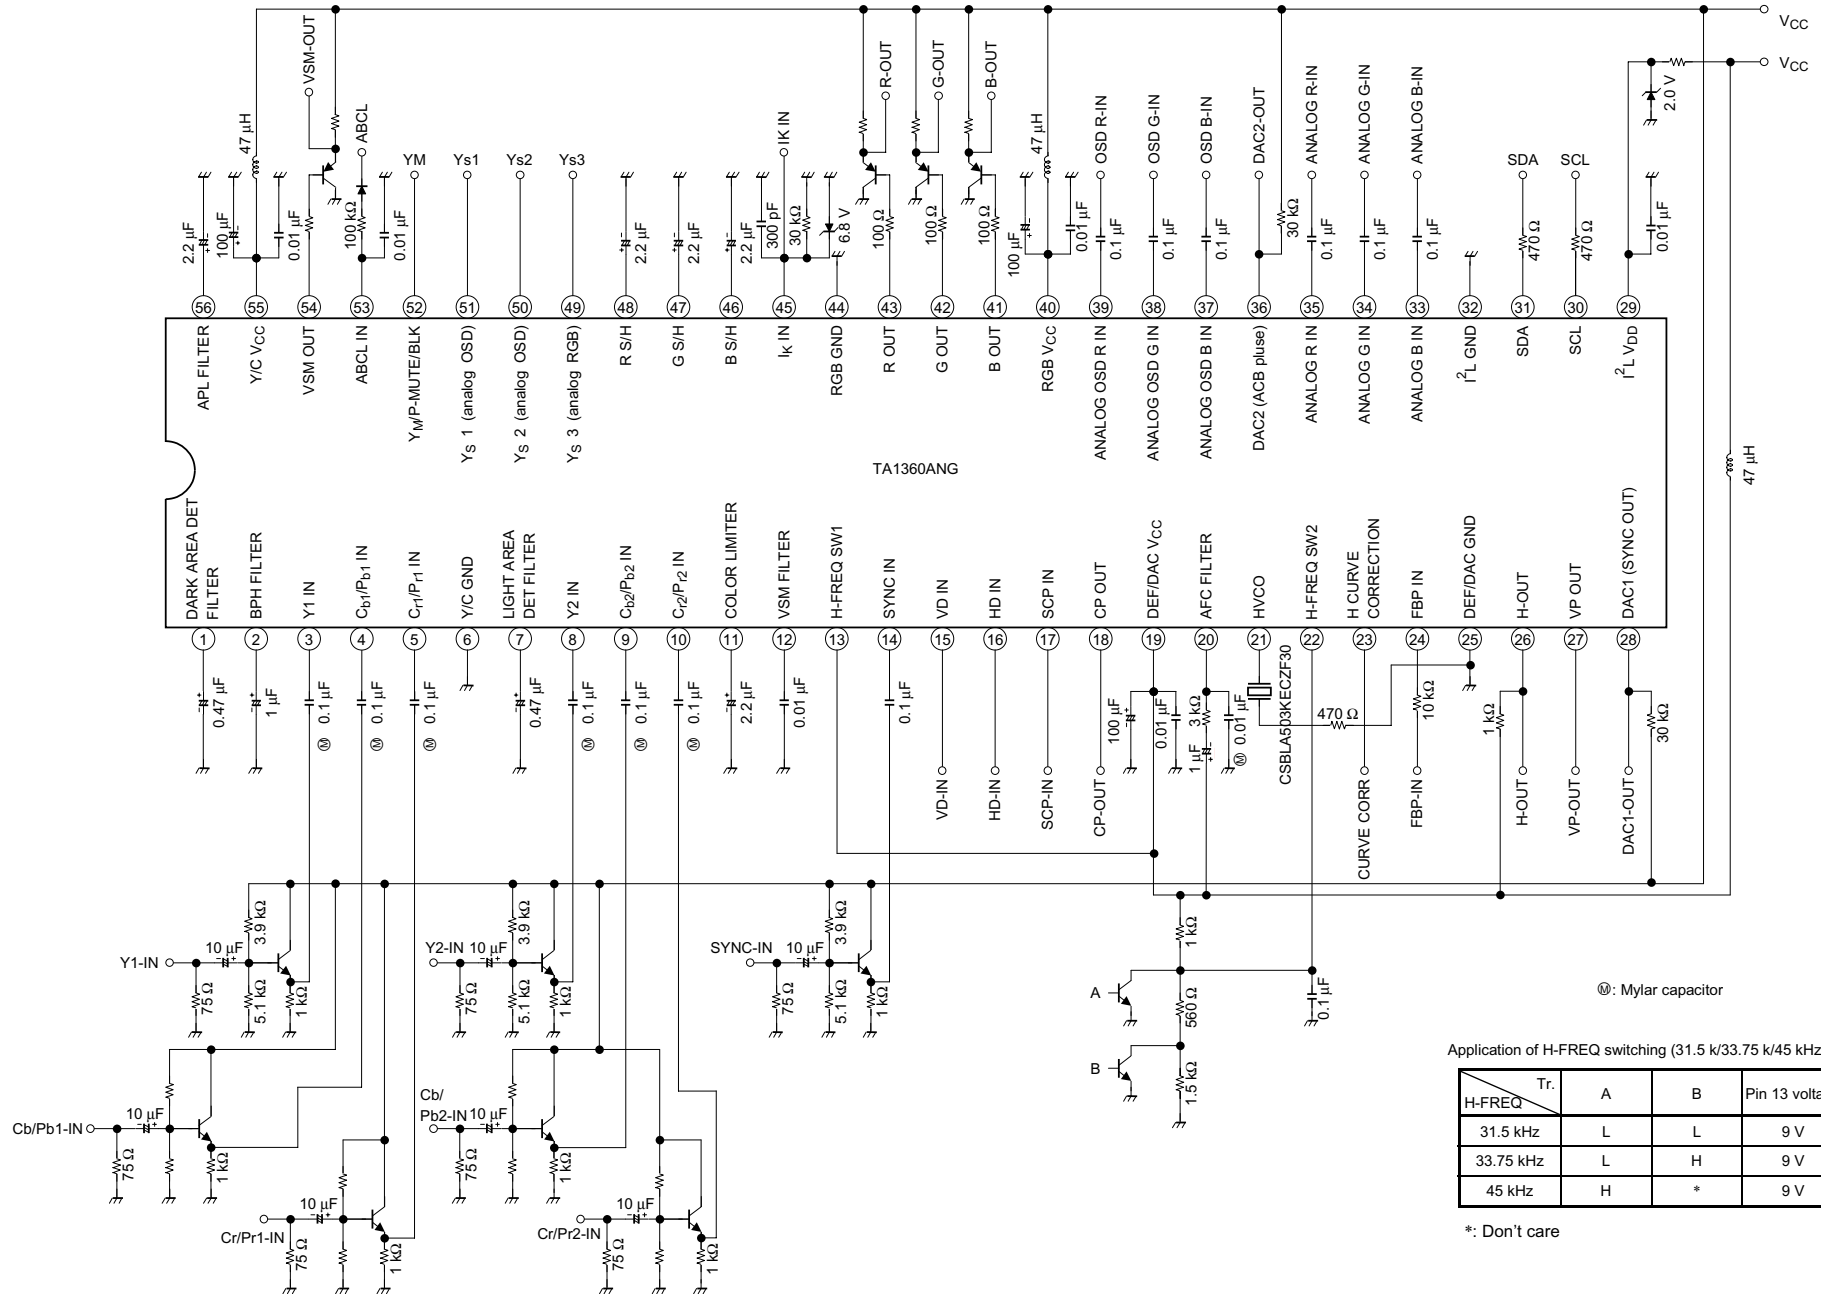


Ⓜ: Mylar capacitor

Application of H-FREQ switching (31.5 k/33.75 k/45 kHz)

| H-FREQ \ Tr. | A | B | Pin 13 voltage | Pin 22 voltage |
|--------------|---|---|----------------|----------------|
| 31.5 kHz | L | L | 9 V | 6 V |
| 33.75 kHz | L | H | 9 V | 3 V |
| 45 kHz | H | * | 9 V | 0 V |

*: Don't care


ACB Application Circuit

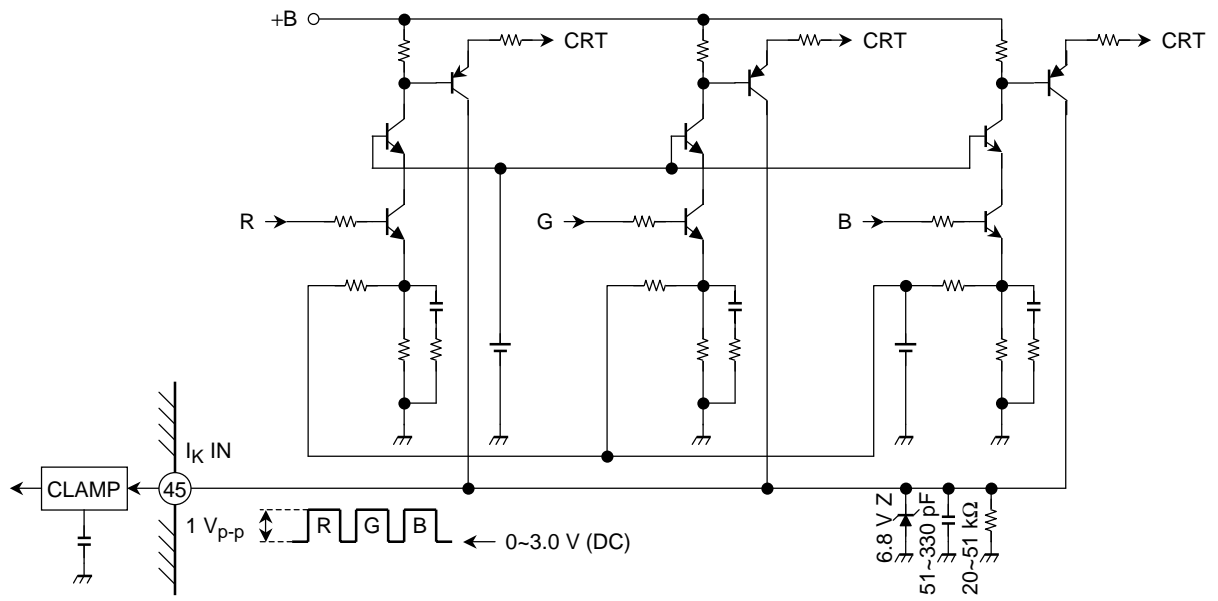

Package Dimensions

SDIP56-P-600-1.78

Unit : mm

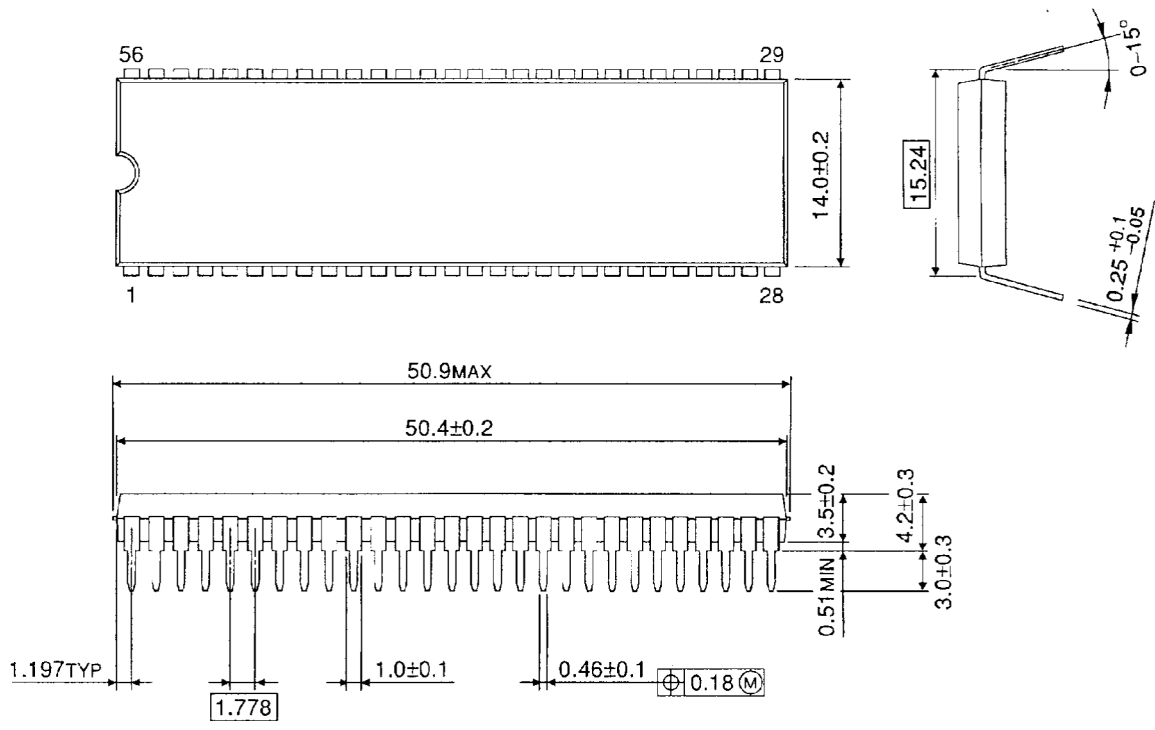

Weight: 5.55 g (typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.