
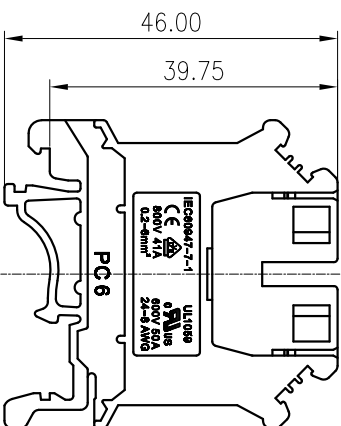

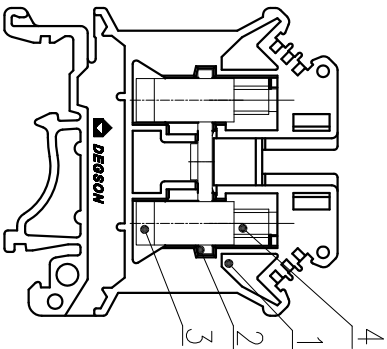


标注公差/General tolerances(mm)		
0	>3	>180
~	>6	>180
~	>10	>180
~	>18	>180
3	6	10
~	10	18
~	18	30
~	30	50
~	50	80
~	80	120
~	120	180
~	180	250
~	250	315
~	315	400
~	400	500
~	500	>500
~	>500	>500
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.57	±0.80
±0.93	±1.05	±1.15
±1.60	±2.20	±2.50
0.1/10	0.1/10	0.1/10
±Z	±Z	±Z

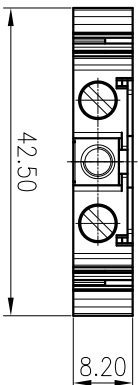

4	Screw	Copper Alloy	M4\Ni Plated
3	Cage	Copper Alloy	M4\Ni Plated
2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)	600/50	600/50	600/5	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级	III/3	/	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/41	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4. 1.2/10.53			
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~6/10~24(Sol/Str)&8(str)			
剥线长度/Stripping length(mm)	8.20			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			
标准颜色编号/Standard color number:				
PAVITONE / RAL	/			

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.04
 CHKD: Mao J 2020.06.04
 DRFT: LXX 2017.12.25

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: PC6-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------