

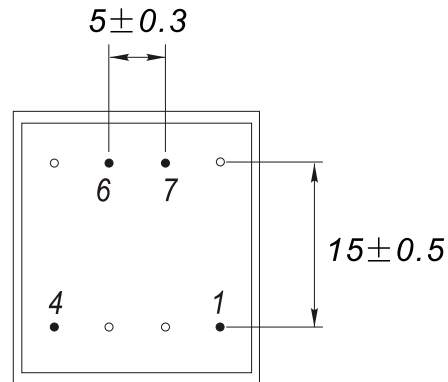


Rev.	Description	Date
A0	New release	2019.06.17

1. PHYSICAL CHARACTERISTICS (mm)

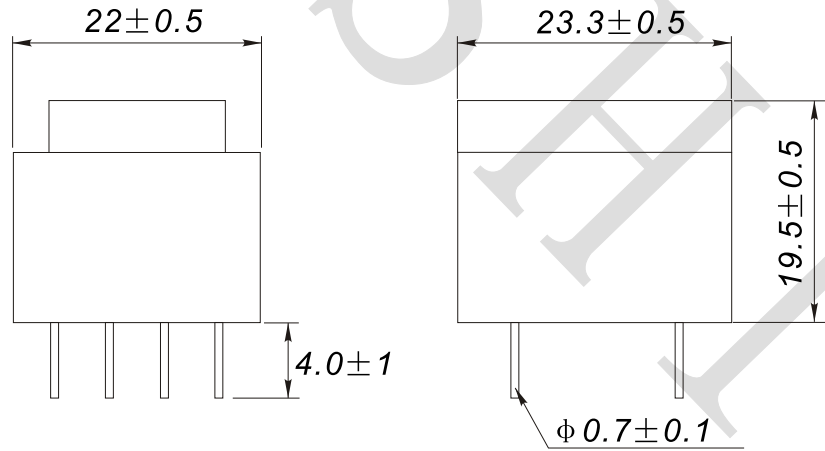

Marking




NOTES:

Temp 20°C 48%RH
RoHS Compliant

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization

2. ELECTRONICAL SCHEMATIC

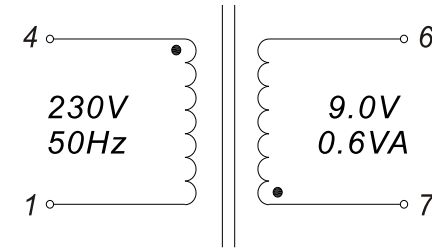

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz

Load Sec voltage: 9V@67mA

Hi-Pot: 3600V, 50Hz, 10mA, 2S Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: >28%

NAME:	Potting Transformer		
CUSTOMER P/N:		DATE:	2019-06-17
SHINHOM P/N:	PE201012	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD