
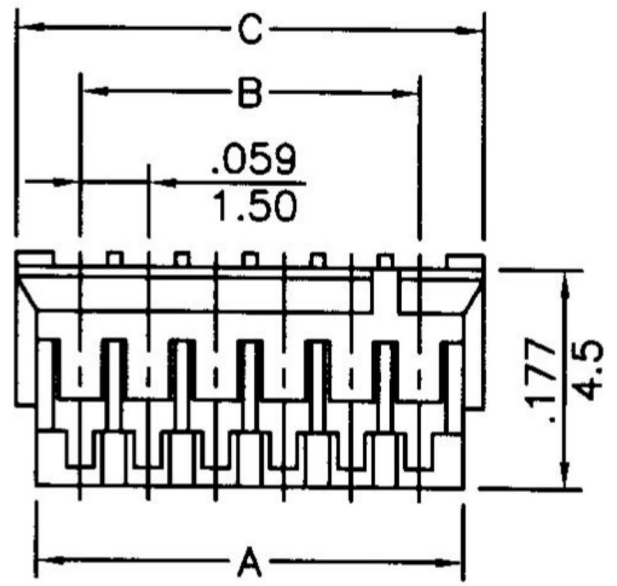



1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

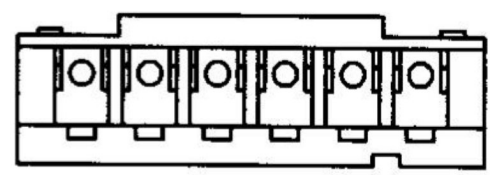

- * Poles: 2-13
- * Material: NYLON 66 UL94V-0
- * Suitable T1500-TPP00000R terminal
- * Mates with W1600 series wafer

- Specifications
- * Current rating: 0.7A AC, DC
 - * Voltage rating: 50V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 500MΩ min.
 - * Withstand voltage: 500V AC/minute

CIRCUITS	DIMENSION in.(mm)		
	A	B	C
2	0.130(3.3)	0.059(1.50)	0.177(4.5)
3	0.189(4.8)	0.118(3.00)	0.236(6.0)
4	0.248(6.3)	0.177(4.50)	0.295(7.5)
5	0.307(7.8)	0.236(6.00)	0.354(9.0)
6	0.366(9.3)	0.295(7.50)	0.413(10.5)
7	0.425(10.8)	0.354(9.00)	0.472(12.0)
8	0.484(12.3)	0.413(10.50)	0.531(13.5)
9	0.543(13.8)	0.472(12.00)	0.591(15.0)
10	0.602(15.3)	0.531(13.50)	0.650(16.5)
11	0.661(16.8)	0.591(15.00)	0.709(18.0)
12	0.720(18.3)	0.650(16.50)	0.768(19.5)
13	0.780(19.8)	0.709(18.00)	0.827(21.0)

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY	 TOLERANCE 容許公差 .0 ±0.3 .00 ± ANG. ± UNIT 單位 M M SCALE 比例 參考 SIZE 紙張尺寸 A 4 PAGE 張數 1 OF 1 REV. 版次 A	PART NAME 品名 1.50mm HOUSING XXP WHITE COLOR NYLON 66 UL94V-0 ROHS
DWG. 製圖 BETTY		DATE 制表日 2010/10/29

1 2 3 4 5 6 7 8