
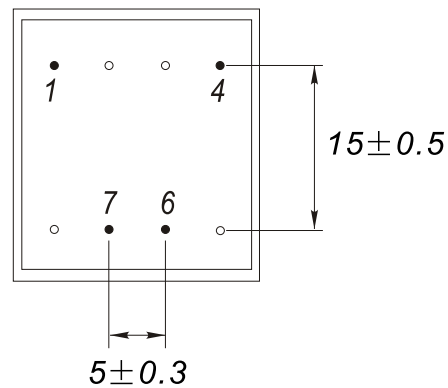


Rev.	Description	Date
A0	New release	2016.02.18

### 1. PHYSICAL CHARACTERISTICS (mm)

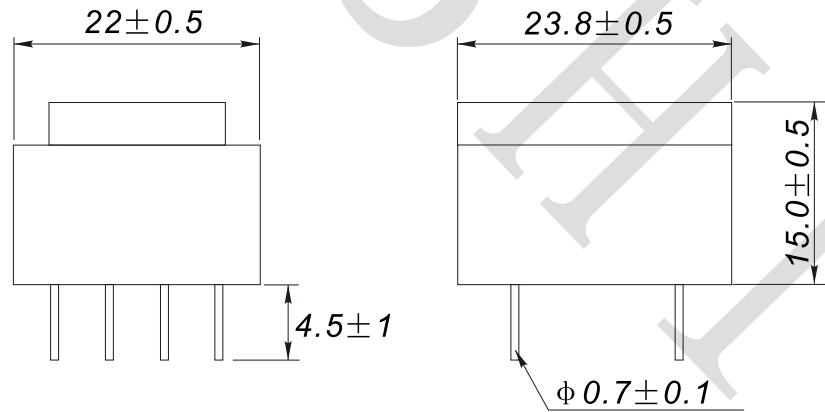


#### Marking

1	PE200602	8
	Pri: 230V, 50-60Hz 4-1	
	Sec: 9.0V, 39mA 7-6	
4	YYWW	5

#### NOTES:

Temp 20°C 48%RH  
RoHS Compliant

### 2. ELECTRONICAL SCHEMATIC

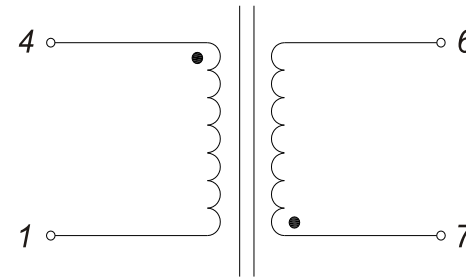

### 3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz

Sec load voltage: 9.0V@39mA

Output Power: 0.35VA

Hi-Pot: 3600V, 50Hz, 10mA, 2S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

NAME:	Power Transformer		
CUSTOMER P/N:		DATE:	2016-02-18
SHINHOM P/N:	PE200602	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



**SHINHOM**  
SHAANXISHINHOM ENTERPRISE CO.LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization