
Wi-Fi Flexible and PCB Antennas




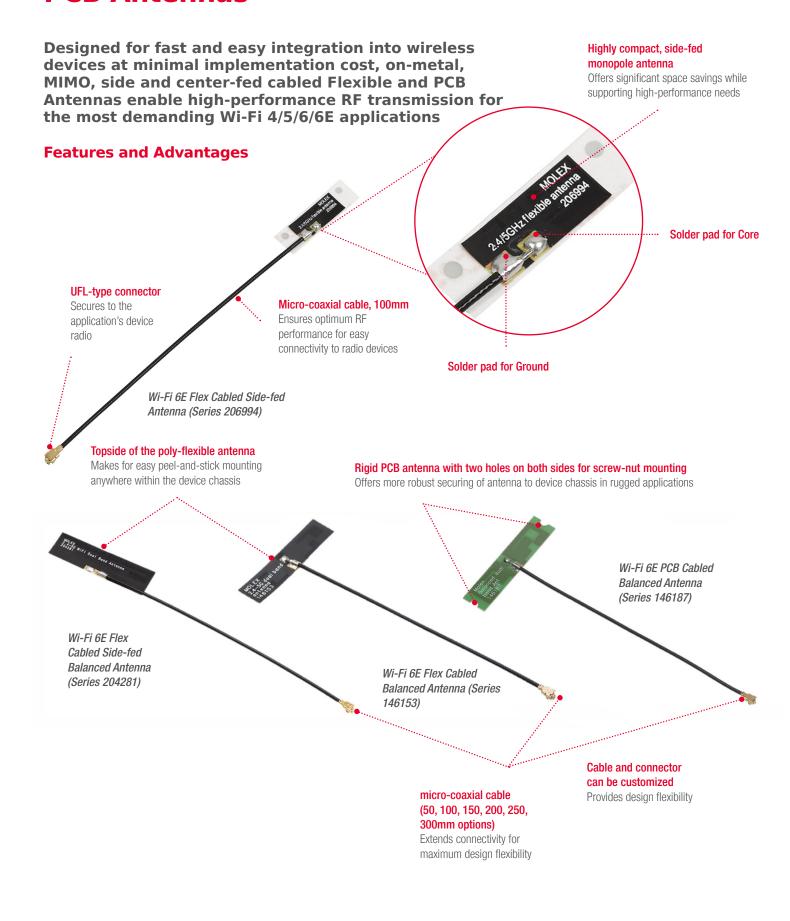

Wi-Fi Flexible and PCB Antennas

molex

Features and Advantages

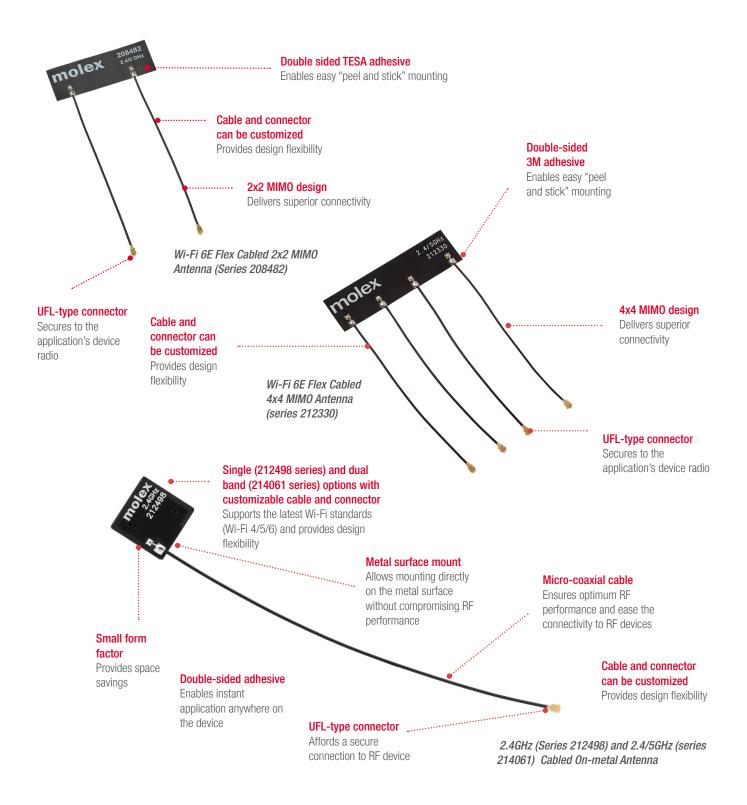

Wi-Fi Flexible and PCB Antennas

molex

Applications

Consumer

Connected Home

Smart Home

White goods

Smart lighting

Automotive

Connected Vehicle

Comfort and Infotainment

Industrial

Smart Cities

Medical

Connected diagnostics

Connected health







Smart Cities



Infotainment

Specifications

REFERENCE INFORMATION

Reference Information Packaging: PET Film

Mates with: Surface-mount, micro-coaxial jack

receptacle (Series: 73412) Designed In: Millimeters

RoHS: Yes Halogen Free: Yes Glow Wire Capable: No

ELECTRICAL

RF Power (Watt): 2 Return Loss:

Refer to Product Specifications Average Total Radiation Efficiency (%): Refer to Product Specifications Peak Gain (dBi):Refer to Product Specifications

Input Impedance (ohms): 50

MECHANICAL

Refer to Product Specifications

PHYSICAL

Material: Flexi (206994. 204281, 146187, 208482, 212330, 146186)
Plastic (212498, 214061);
FR4 PCB (146153, 146220)

Plating:

Refer to Sales Drawings
Operating Temperature: -30 to +85°C
-40 to +85°C (206995, 208482, 212330)

Ordering Information

Series No.	Standard	Substrate	Cable Feed	Dimensions (mm)	Cable Lengths (mm)
212498	Legacy Wi-Fi 1/2/3	Plastic	Side	20.20 by 20.20	100, 150, 200*
214061	Wi-Fi 4/5/6	Plastic	Side	20.20 by 20.20	100, 150, 200*
206994	Wi-Fi 4/5/6/6E	Flexi material	Side	15.00 by 6.00	100**
208482	Wi-Fi 4/5/6/6E	Flexi material	Center	55.20 by 19.20 by 0.16	100, 150, 200*
204281	Wi-Fi 4/5/6/6E	Flexi material	Side	35.00 by 11.00 by 0.10	50, 100, 150, 200, 250, 300*
146153	Wi-Fi 4/5/6/6E	Flexi material	Center	34.90 by 9.00 by 0.10	50, 100, 150, 200, 250, 300*
146187	Wi-Fi 4/5/6/6E	PCB (FR4)	Center	40.95 by 9.00 by 0.70	50, 100, 150, 200, 250, 300*
212330	Wi-Fi 4/5/6/6E	Flexi material	Center	70.00 by 20.00	100, 150, 200*
146186	Wi-Fi 4/5/6/6E + GNSS	Flexi material	Center	53.00 by 18.00	100, 150, 200, 250, 300*
146220	Wi-Fi 4/5/6/6E + GNSS	PCB	Center	53.00 by 16.60	100, 150, 200, 250, 300*

^{*} Cable and connector can be customized

^{**} Connector can be customized