

NOTE


- MATERIALS: HOUSING: NYLON 46 (DSM TS250F8) UL94V-0  
 COVER: PA9T UL94V-0  
 CONTACT: PHOSPHOR BRONZE  
 LATCH: BRASS

2.DIMENSION:


PIN	A	B	C	D	PIN	A	B	C	D
3	8.10	1.0	6.10	5.96	32	22.60	15.5	20.60	6.36
4	8.60	1.5	6.60	5.96	33	23.10	16.0	21.10	6.36
5	9.10	2.0	7.10	5.96	34	23.60	16.5	21.60	6.36
6	9.60	2.5	7.60	5.96	35	24.10	17.0	22.10	6.36
7	10.10	3.0	8.10	5.96	36	24.60	17.5	22.60	6.36
8	10.60	3.5	8.60	5.96	37	25.10	18.0	23.10	6.36
9	11.10	4.0	9.10	5.96	38	25.60	18.5	23.60	6.36
10	11.60	4.5	9.60	5.96	39	26.10	19.0	24.10	6.36
11	12.10	5.0	10.10	5.96	40	26.60	19.5	24.60	6.36
12	12.60	5.5	10.60	5.96	41	27.10	20.0	25.10	6.36
13	13.10	6.0	11.10	5.96	42	27.60	20.5	25.60	6.36
14	13.60	6.5	11.60	5.96	43	28.10	21.0	26.10	6.36
15	14.10	7.0	12.10	5.96	44	28.60	21.5	26.60	6.36
16	14.60	7.5	12.60	5.96	45	29.10	22.0	27.10	6.36
17	15.10	8.0	13.10	5.96	46	29.60	22.5	27.60	6.36
18	15.60	8.5	13.60	5.96	47	30.10	23.0	28.10	6.36
19	16.10	9.0	14.10	5.96	48	30.60	23.5	28.60	6.36
20	16.60	9.5	14.60	5.96	49	31.10	24.0	29.10	6.36
21	17.10	10.0	15.10	5.96	50	31.60	24.5	29.60	6.36
22	17.60	10.5	15.60	5.96	51	32.10	25.0	30.10	6.36
23	18.10	11.0	16.10	5.96	52	32.60	25.5	30.60	6.36
24	18.60	11.5	16.60	5.96	53	33.10	26.0	31.10	6.36
25	19.10	12.0	17.10	5.96	54	33.60	26.5	31.60	6.36
26	19.60	12.5	17.60	5.96	55	34.10	27.0	32.10	6.36
27	20.10	13.0	18.10	5.96	56	34.60	27.5	32.60	6.36
28	20.60	13.5	18.60	5.96	57	35.10	28.0	33.10	6.36
29	21.10	14.0	19.10	5.96	58	35.60	28.5	33.60	6.36
30	21.60	14.5	19.60	5.96	59	36.10	29.0	34.10	6.36
31	22.10	15.0	20.10	6.36	60	36.60	29.5	34.60	6.36

$B = 0.5(\text{No. of Contact} - 1)$   
 $C = B + 5.1\text{mm}$






**RoHS Compliant**



FFC/FPC DIMENSION  
 THICKNESS  $0.3^{+0.03}_{-0.00}\text{mm}$

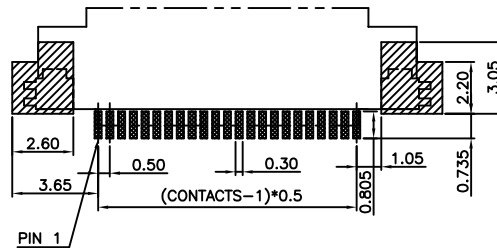

PC BOARD LAYOUT

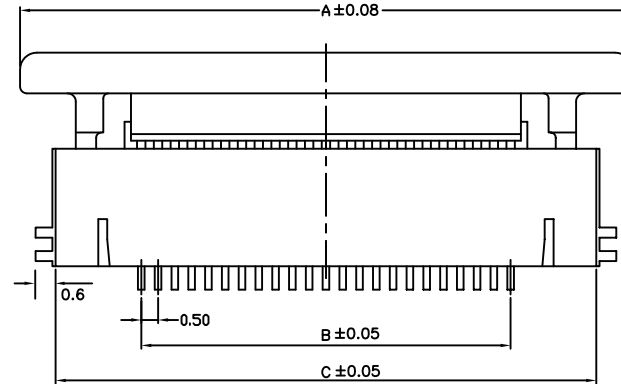

TOLERANCES ARE

- X ±
- .X ± 0.20
- .XX ± 0.10
- .XXX ±
- ANG ±