


FEATURES:

- Universal Input range from 100V–240V.
- Suitable for High Power LEDs lighting application.
- Power Factor : $Pf > 0.5$
- Fly leads 20AWG 15cm for rapid connection
- Waterproof: IP65 for dry and wet location
- Tc Point measured, Max case temperature: 70° C
- Protections: Short-Circuit / Over Load


Safety Approval:

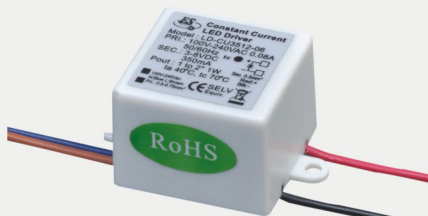

SPECIFICATION:

	Model No.	LD-CU3512-06	LD-CU3513-06	LD-CU7012-06
Input	Voltage Range (VAC)	100 Vac – 240 Vac		
	Frequency Range (Hz)	50 Hz / 60 Hz		
	AC Current	0.1A@115VAC / 0.04A@230VAC		
	Leakage Current	<1mA / 240 Vac		
Output	Voltage Range (VDC)	3–8Vdc	6–12Vdc	3–5 Vdc
	Rated Current Range (mA)	350mA ± 6%	350mA ± 6%	700mA ± 6%
	Rated Power (W)	2.4W Max	3.6W Max	3W Max
	Numbers of LEDs	1 to 2 x 1.2w LED	2 to 3 x 1.2w LED	1 x 3w LED
	Efficiency (Typ.)	65%	70%	60%
Environment	Operating Temp.	–20°C~50°C full load .		
	Operating Humidity	20% ~ 95% RH non-condensing.		
	Storage Temp. / Humidity	–20 ~ +80°C / 10% ~ 95% RH		
	Ambient Temp.	25°C at 240Vac		
Safety Approval	Safety Standards	CE EN61347 / EN55015		
Other	Cord code/ Cord Color	Primary: 1007/#20 15cm L: brown N: blue Secondary: 1007/#20 15cm +: red -: black		

Mechanical Dimension: 30Lx29Wx22H mm

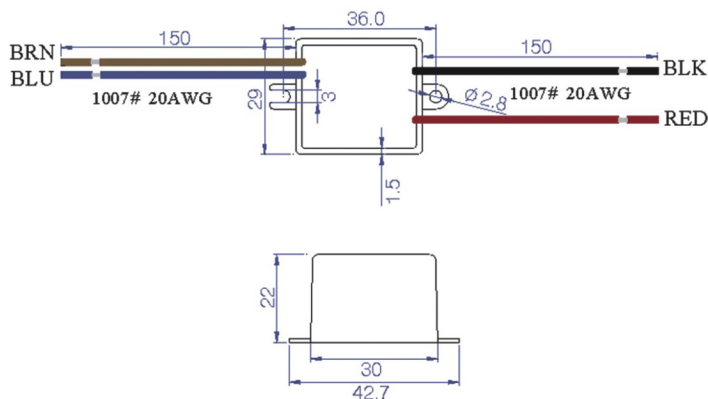

Note 1: Lamps must be wired in series, and total value of Vf should be under rated DC Voltage.

Note 2: Disconnect the mains supply before installing. Do not turn on/off from output port.

Note 3: Parameter measured at full load 25°C ambient temperature.

Note 4: Two years warranty