



Rev.	Description	Date
A0	New release	2023.01.09

1. PHYSICAL CHARACTERISTICS (mm)

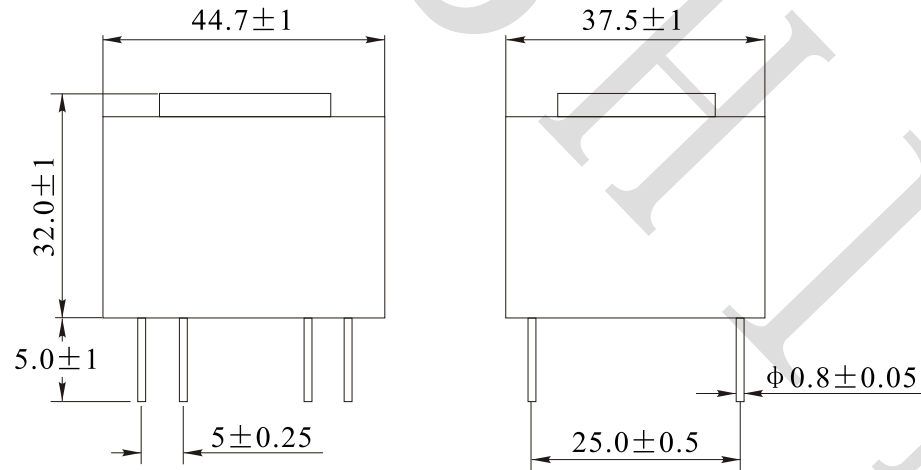


Bottom view

Top Marking



2. ELECTRONICAL SCHEMATIC

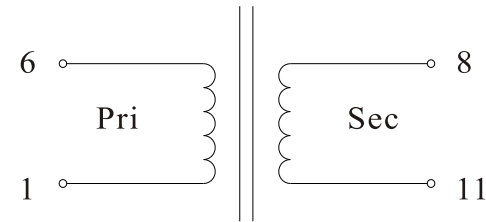

3. ELECTRONICAL SPECIFICATIONS

- Pri voltage: 230V, 50/60Hz
- Sec no-load voltage: $30V \pm 5\%$
- Sec load voltage: $24V \pm 5\%$ @ 208mA
- Power: 5.0VA
- Hi-Pot: 4000V/AC, 1mA, 10S Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: $>28\%$

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NAME:	Potting transformer		
CUSTOMER P/N:	44234	DATE:	2023-01-09
SHINHOM P/N:	PE421434	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM

SHANHOM SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization