
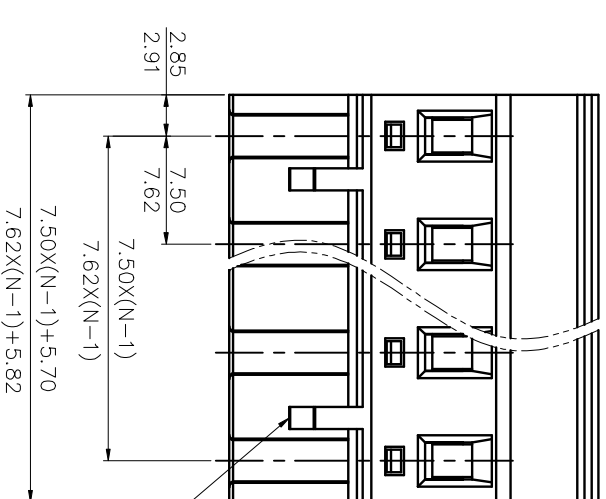
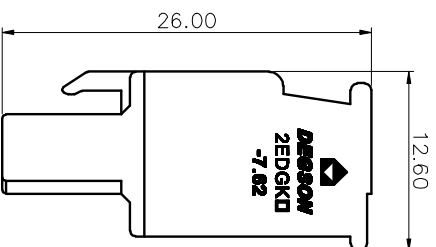
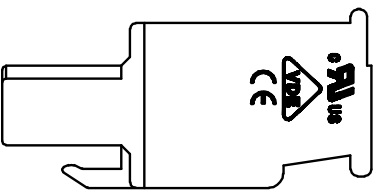


REVISION RECORD

REV	ECH	DESCRIPTION	DRFT	DATE

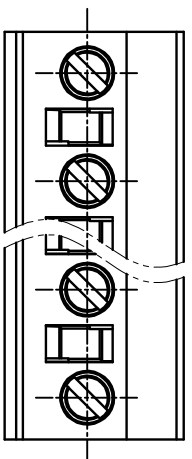

02P: Clasp on the right from this view

NOTES:

1. UL Standard
1. Rated voltage/current : 300V / 15A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M2.5 , 3.54Lb.in
4. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	400V
Rate Current(A)	18A

2. Torque value : M2.5 , 0.4N•m
3. Wire range : 2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.50/7.62mm, Poles : N=02~12P
3. Stripping length : 7~8mm
4. Operating temperature : -40C~+105C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension	range	mm
Over 10	Over 60	Over 100	Over 150
TO 6	TO 10	TO 30	TO 150
TO 10	TO 24	TO 30	TO 150
TO 10	TO 24	TO 30	TO 150
TO 10	TO 24	TO 30	TO 150
TO 6	TO 10	TO 24	TO 150
±0.15/±0.20	±0.30/±0.50	±0.50/±0.70	±1.00/±1.30
			±2°

6. RoHS Compliance

2EDGKA - 7.5/7.62 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch)
 (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

00A-(RoHS)
 00A-(Standard)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	NINGBO DEGSON ELECTRICAL CO.,LTD 宁波德森电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1