



| Rev. | Description | Date |
|------|-------------|------------|
| A0 | New release | 2023.02.22 |
| | | |
| | | |

1. PHYSICAL CHARACTERISTICS (mm)

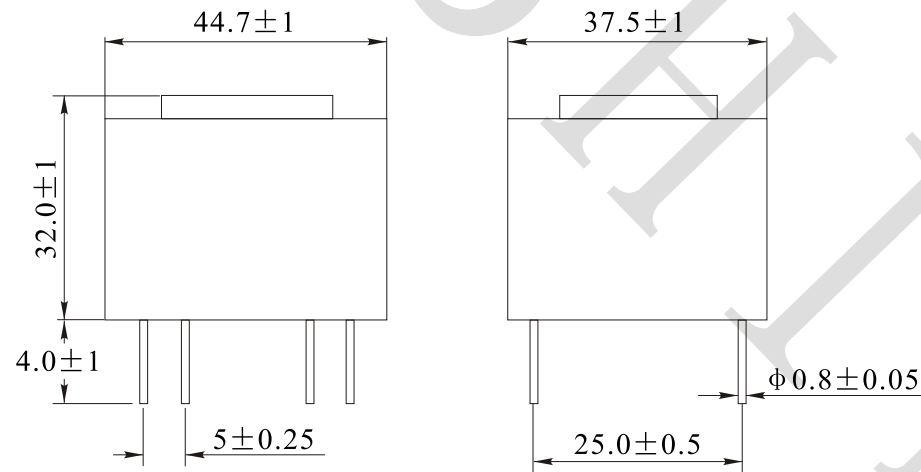


Bottom view

Top Marking



2. ELECTRONICAL SCHEMATIC

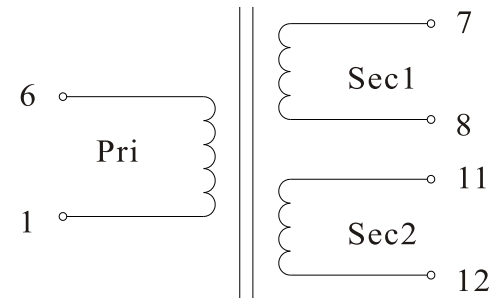

3. ELECTRONICAL SPECIFICATIONS

- Pri voltage: 230V, 50/60Hz
- Sec no load voltage: 2x15.4V ± 5%
- Sec1 load voltage: 12V ± 5% @ 208mA
- Sec2 load voltage: 12V ± 5% @ 208mA
- Power: 5.0VA
- Hi-Pot: 4000V/AC, 1mA, 10S Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: >28%

NOTES:

Temp 20°C 48%RH
RoHS Compliant

| | | | |
|---------------|---------------------|-------------|------------|
| NAME: | Potting transformer | | |
| CUSTOMER P/N: | 44237 | DATE: | 2023-02-22 |
| SHINHOM P/N: | PE421437 | REV: | A0 |
| DRAWN BY: | CHECKED BY: | APPROVE BY: | |