


RECOMMENDED P.C.BOARD HOLE DIMM.

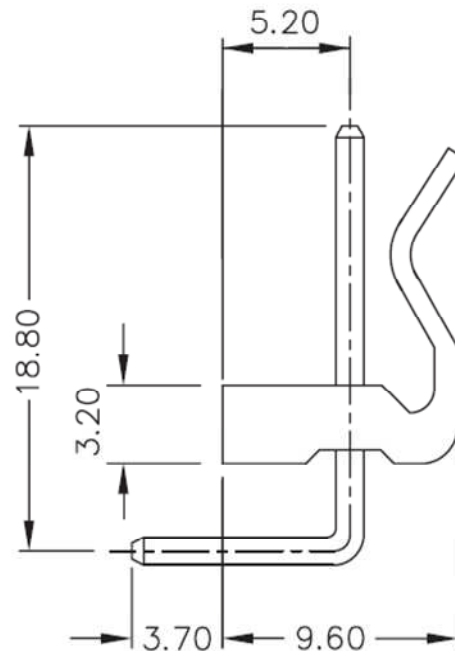

TOLERANCES ARE

- X. ± 0.30
- .X ± 0.30
- .XX \pm
- .XXX \pm
- ANG \pm

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Insulation Resistance: $1000\text{M}\Omega / \text{min.}$

Dielectric Withstanding Voltage: $1500\text{V AC} / \text{min.}$

Contact Resistance: $10\text{m}\Omega / \text{max.}$

Material

Material: Nylon66, UL94V-2

RoHS Compliant

Poles	Dimension mm (in.)		Part No.
	A	B	
2	3.96	8.00	PWL 02MR
3	7.92	12.00	PWL 03MR
4	11.88	15.90	PWL 04MR
5	15.84	20.00	PWL 05MR
6	19.80	24.00	PWL 06MR
7	23.76	27.90	PWL 07MR
8	27.72	31.90	PWL 08MR
9	31.86	35.80	PWL 09MR
10	35.64	39.90	PWL 10MR
11	39.60	43.90	PWL 11MR
12	43.56	47.80	PWL 12MR
13	47.52	51.80	PWL 13MR
14	51.48	55.70	PWL 14MR
15	55.44	59.80	PWL 15MR
16	59.40	63.80	PWL 16MR
17	63.36	67.70	PWL 17MR
18	67.32	71.70	PWL 18MR
19	71.28	75.60	PWL 19MR
20	75.24	79.80	PWL 20MR