BLM18AG331SN1#

"#" indicates a package specification code.

In Production RoHS REACH

< List of part numbers with package codes >
BLM18AG331SN1B BLM18AG331SN1D BLM18AG331SN1J

Appearance & Shape



Features

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.
BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.
The nickel barrier structure of the external electrodes provides excellent solder heat resistance.
BLM_A series generates an impedance from the relatively low frequencies. Therefore BLM_A series is effective in noise suppression in a wide frequency range (30MHz to several hundred MHz).

Applications

Other Usage	For general

Packaging Information

Packaging	Specifications	Minimum Order Quantity
B	Bulk(Bag)	1000
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

BLM18AG331SN1#

"#" indicates a package specification code.

Specifications

Shape	SMD
Size Code (in mm)	1608
Size Code (in inch)	0603
Length	1.6mm
Length Tolerance	±0.15mm
Width	0.8mm
Width Tolerance	±0.15mm
Thickness	0.8mm
Thickness Tolerance	±0.15mm
Impedance (at 100MHz)	330Ω
Impedance (at 100MHz) Tolerance	±25%
Rated Current (at 85℃)	600mA
Rated Current (at 125℃)	600mA
DC Resistance(max.)	0.3Ω
Operating Temperature Range	-55℃ to 125℃
Mass(typ.)	0.005g
Number of Circuit	1

BLM18AG331SN1#

"#" indicates a package specification code.

Product Data

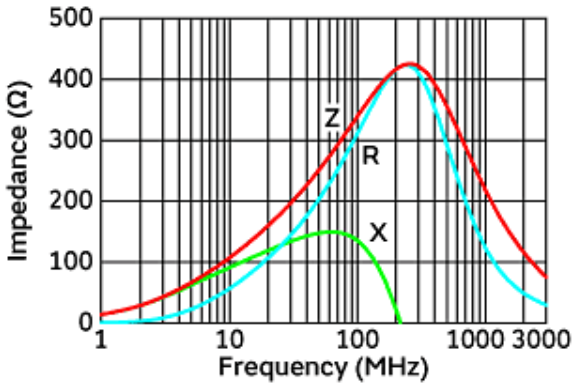

Impedance-Frequency Characteristics

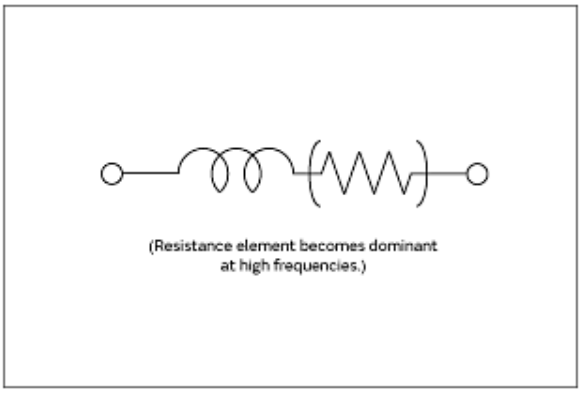

Equivalent Circuit