

Is Now Part of



# **ON Semiconductor**®

# To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="https://www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="https://www.onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an equif prese



August 2016

## 2N7000 / 2N7002 / NDS7002A N-Channel Enhancement Mode Field Effect Transistor

#### Features

- High Density Cell Design for Low R<sub>DS(ON)</sub>
- Voltage Controlled Small Signal Switch
- Rugged and Reliable
- High Saturation Current Capability

#### Description

These N-channel enhancement mode field effect transistors are produced using Fairchild's proprietary, high cell density, DMOS technology. These products have been designed to minimize on-state resistance while providing rugged, reliable, and fast switching performance. They can be used in most applications requiring up to 400 mA DC and can deliver pulsed currents up to 2 A. These products are particularly suited for low-voltage, low-current applications, such as small servo motor control, power MOSFET gate drivers, and other switching applications.





## Ordering Information

Part Number	Marking	Package	Packing Method	Min Order Qty / Immediate Pack Qty
2N7000	2N7000	TO-92 3L	Bulk	10000 / 1000
2N7000_D74Z	2N7000	TO-92 3L	Ammo	2000 / 2000
2N7000_D75Z	2N7000	TO-92 3L	Tape and Reel	2000 / 2000
2N7000_D26Z	2N7000	TO-92 3L	Tape and Reel	2000 / 2000
2N7002	702	SOT-23 3L	Tape and Reel	3000 / 3000
NDS7002A	712	SOT-23 3L	Tape and Reel	3000 / 3000

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_c = 25^{\circ}C$  unless otherwise noted.

Symbol	Devenetor	Value			L Init	
Symbol	Parameter	2N7000	2N7002	NDS7002A	Unit	
V <sub>DSS</sub>	Drain-to-Source Voltage		60		V	
V <sub>DGR</sub>	Drain-Gate Voltage ( $R_{GS} \le 1 M\Omega$ )		V			
V <sub>GSS</sub>	Gate-Source Voltage - Continuous		±20		V	
	Gate-Source Voltage - Non Repetitive (tp < 50 $\mu$ S)					
Ι <sub>D</sub>	Maximum Drain Current - Continuous	200	115	280	mA	
	Maximum Drain Current - Pulsed	500	800	1500		
PD	Maximum Power Dissipation Derated above 25°C	400	200	300	mW	
		3.2	1.6	2.4	mW/°C	
T <sub>J,</sub> T <sub>STG</sub>	Operating and Storage Temperature Range	-55 to	150	-65 to 150	°C	
ΤL	Maximum Lead Temperature for Soldering Purposes, 1/16-inch from Case for 10 Seconds		300		°C	

#### **Thermal Characteristics**

Values are at  $T_C = 25^{\circ}C$  unless otherwise noted.

Symbol	Parameter		Value		Unit
Symbol	Falanielei	2N7000	2N7002	NDS7002A	Unit
$R_{\thetaJA}$	Thermal Resistance, Junction to Ambient	312.5	625	417	°C/W

## **Electrical Characteristics**

Values are at  $T_{\rm C}$  = 25°C unless otherwise noted.


Symbol	Parameter	Conditions	Туре	Min.	Тур.	Max.	Unit
Off Char	acteristics						
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	$V_{GS}$ = 0 V, I <sub>D</sub> = 10 $\mu$ A	All	60			V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 48 V, V <sub>GS</sub> = 0 V	2N7000			1	μA
		$V_{DS} = 48 V, V_{GS} = 0 V,$ $T_{C} = 125^{\circ}C$				1	mA
		V <sub>DS</sub> = 60 V, V <sub>GS</sub> = 0 V	2N7002 NDS7002A			1	μA
		V <sub>DS</sub> = 60 V, V <sub>GS</sub> = 0 V, T <sub>C</sub> = 125°C				0.5	mA
I <sub>GSSF</sub>	Gate - Body Leakage, Forward	V <sub>GS</sub> = 15 V, V <sub>DS</sub> = 0 V	2N7000			10	nA
		$V_{GS}$ = 20 V, $V_{DS}$ = 0 V	2N7002 NDS7002A			100	nA
I <sub>GSSR</sub>	Gate - Body Leakage, Reverse	V <sub>GS</sub> = -15 V, V <sub>DS</sub> = 0 V	2N7000			-10	nA
		V <sub>GS</sub> = -20 V, V <sub>DS</sub> = 0 V	2N7002 NDS7002A			-100	nA

Symbol	Parameter	Conditions	Туре	Min.	Тур.	Max.	Unit
n Char	acteristics		1		1		
V <sub>GS(th)</sub>	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $I_D = 1 \text{ mA}$	2N7000	0.8	2.1	3	V
		$V_{DS}$ = $V_{GS}$ , $I_D$ = 250 $\mu$ A	2N7002 NDS7002A	1	2.1	2.5	
R <sub>DS(ON)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA	2N7000		1.2	5	Ω
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA, T <sub>C</sub> = 125°C			1.9	9	
		V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 75 mA			1.8	5.3	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA	2N7002		1.2	7.5	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA, T <sub>C</sub> = 100°C			1.7	13.5	
		V <sub>GS</sub> = 5 V, I <sub>D</sub> = 50 mA			1.7	7.5	
		V <sub>GS</sub> = 5 V, I <sub>D</sub> = 50 mA, T <sub>C</sub> = 100°C			2.4	13.5	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA	NDS7002A		1.2	2	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA, T <sub>C</sub> = 125°C			2	3.5	
		V <sub>GS</sub> = 5 V, I <sub>D</sub> = 50 mA			1.7	3	
		V <sub>GS</sub> = 5 V, I <sub>D</sub> = 50 mA, T <sub>C</sub> = 125°C			2.8	5	
V <sub>DS(ON)</sub>	Drain-Source On-Voltage	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 500 mA	2N7000		0.6	2.5	V
		V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 75 mA			0.14	0.4	
		$V_{GS} = 10 V,$ I <sub>D</sub> = 500 mA	2N7002		0.6	3.75	
		V <sub>GS</sub> = 5.0 V, I <sub>D</sub> = 50 mA V <sub>GS</sub> = 10 V,	NDS7002A		0.09	1.5	-
		$V_{GS} = 10 \text{ V},$ $I_D = 500 \text{ mA}$ $V_{GS} = 5.0 \text{ V},$			0.6	1	
		I <sub>D</sub> = 50 mA			0.09	0.15	
I <sub>D(ON)</sub>	On-State Drain Current	V <sub>GS</sub> = 4.5 V, V <sub>DS</sub> = 10 V	2N7000	75	600		mA
		$\begin{array}{l} V_{GS} = 10 \text{ V}, \\ V_{DS} \geq 2  V_{DS(on)} \end{array}$	2N7002	500	2700		Κ,
			NDS7002A	500	2700		
9 <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 200 mA	2N7000	100	320		mS
		$\begin{array}{l} V_{DS}{\geq}~2V_{DS(ON)},\\ I_{D}=200~\text{mA} \end{array}$	2N7002	80	320		
		V <sub>DS</sub> ≥ 2V <sub>DS(ON)</sub> , I <sub>D</sub> = 200 mA	NDS7002A	80	320		


Symbol	Parameter	Conditions	Туре	Min.	Тур.	Max.	Unit
Dynamic	Characteristics			•		•	
C <sub>iss</sub>	Input Capacitance		All		20	50	pF
C <sub>oss</sub>	Output Capacitance		All		11	25	
C <sub>rss</sub>	Reverse Transfer Capacitance		All		4	5	
t <sub>on</sub>	Turn-On Time		2N7000			10	ns
			2N7002 NDS7002A			20	
t <sub>off</sub> Turn-Off Time	Turn-Off Time		2N7000			10	ns
			2N7002 NDS7002A			20	
Drain-Sc	ource Diode Characterist	tics and Maximum Rati	ngs				
۱ <sub>S</sub>	Maximum Continuous Drain-Source Diode Forward Current		2N7002			115	mA
			NDS7002A			280	
I <sub>SM</sub>	Maximum Pulsed Drain-Source Diode Forward		2N7002			0.8	А
	Current		NDS7002A			1.5	
$V_{SD}$	Drain-Source Diode Forward Voltage	$V_{GS} = 0 V,$ $I_{S} = 115 \text{ mA}^{(1)}$	2N7002		0.88	1.5	V
		$V_{GS} = 0 V,$ $I_{S} = 400 \text{ mA}^{(1)}$	NDS7002A		0.88	1.2	

#### Note:


1. Pulse test : Pulse Width  $\leq$  300 µs, Duty Cycel  $\leq$  2 %.

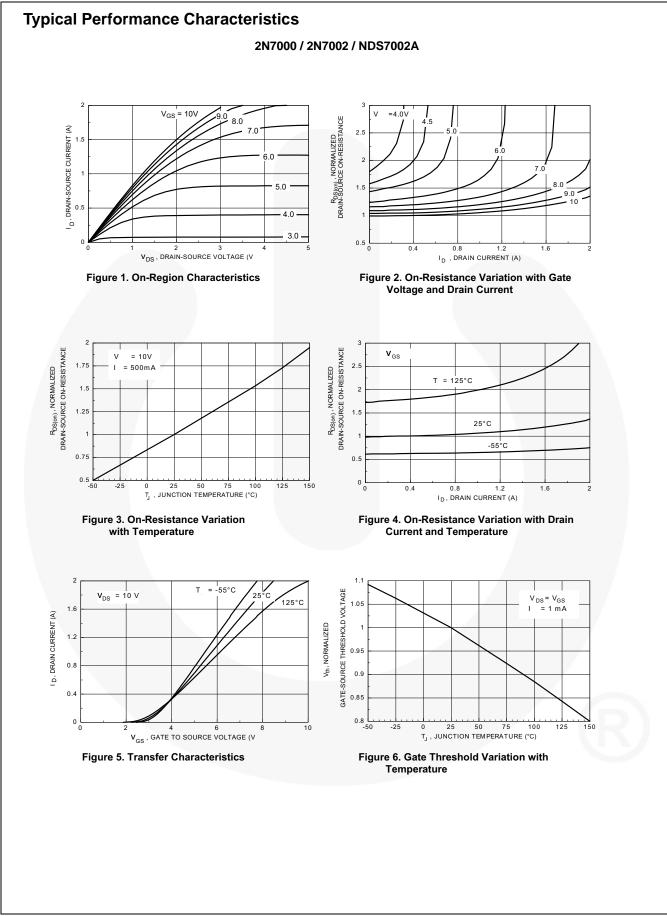



2N7000 / 2N7002 / NDS7002A — N-Channel Enhancement Mode Field Effect Transistor

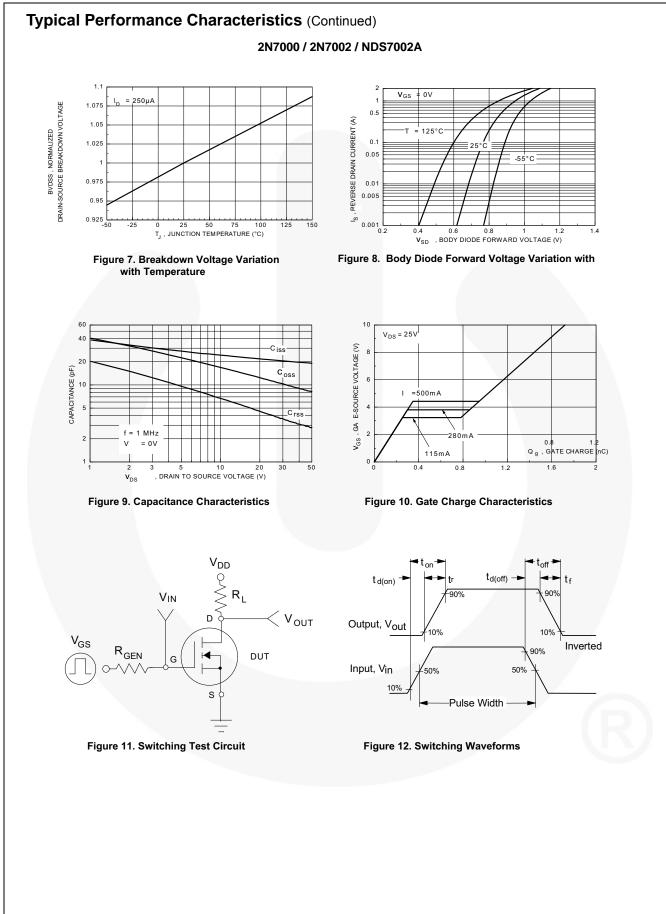

6

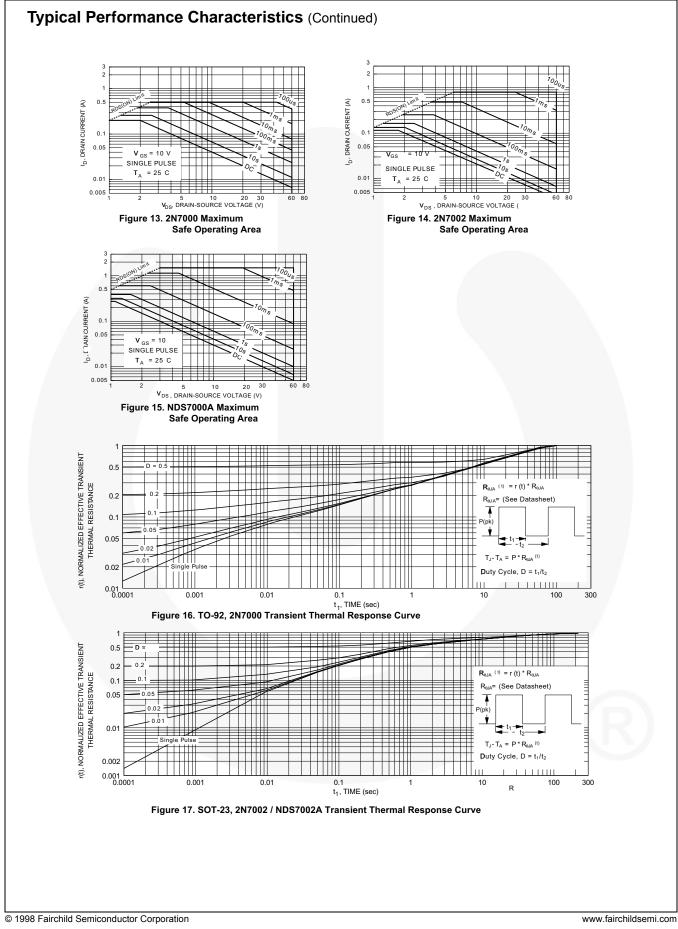

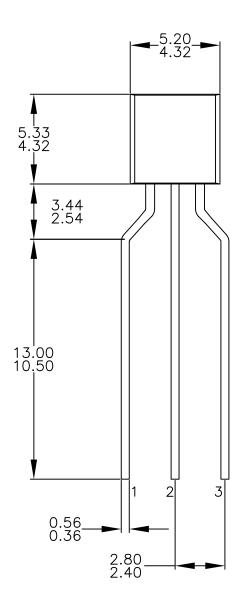


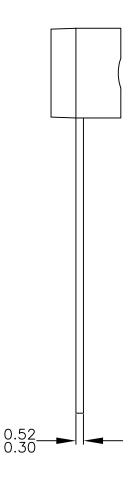



NOTES: UNLESS OTHERWISE SPECIFIED

- DRAWING CONFORMS TO JEDEC MS-013, VARIATION AC. ALL DIMENSIONS ARE IN MILLIMETERS. DRAWING CONFORMS TO ASME Y14.5M-2009. DRAWING FILENAME: MKT-ZA03FREV3. FAIRCHILD SEMICONDUCTOR. Α.

- В. С. D. Е.

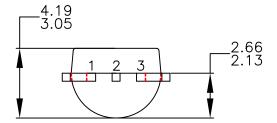

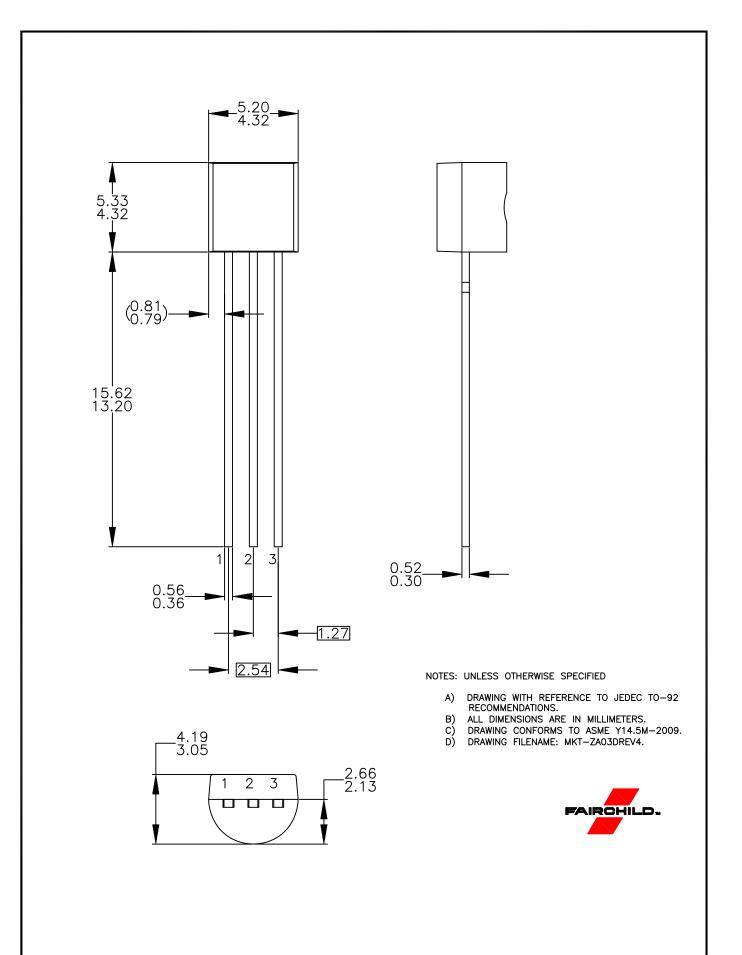

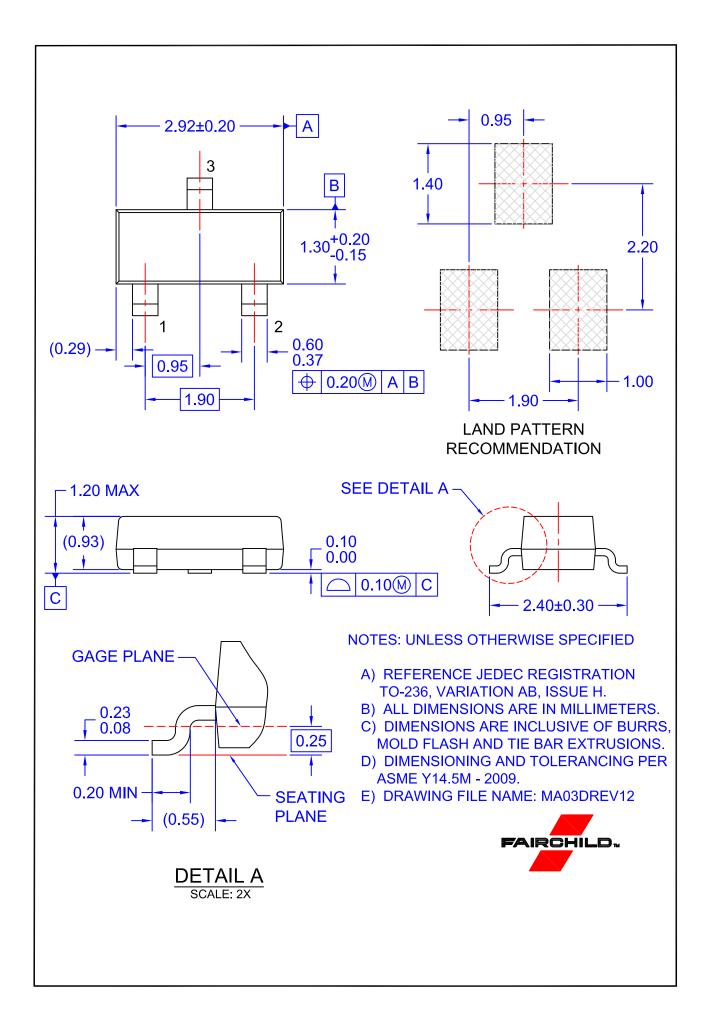

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly ori indirectly, any claim of personal injury or death

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC