

**Micro Commercial Components** 



**Micro Commercial Components** 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

### **Features**

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Halogen free available upon request by adding suffix "-HF" Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Built-in strain relief
- Super fast switching speed under 35ns
- Marking : Cathode band and type number (No '-L' Suffix)

## aximum Ratinus

- Operating Temperature: -65℃ to +175℃
- Storage Temperature: -65°C to +175°C

MCC	Maximum		Maximum DC
Part Number	Recurrent	Maximum	Blocking
	Peak Reverse	RMS Voltage	Voltage
	Voltage	RIVIS VOItage	voltage
ER2A-L	50V	35V	50V
ER2B-L	100V	70V	100V
ER2D-L	200V	140V	200V
ER2G-L	400V	280V	400V
ER2J-L	600V	420V	600V

### Electrical Characteristics @ 25°C Unless Otherwise Specified


			-
Average Forward Current	I <sub>F(AV)</sub>	2.0A	T <sub>L</sub> = 110°C
Peak Forward Surge Current	I <sub>FSM</sub>	50A	8.3ms, half sine
Maximum Instantaneous Forward Voltage ER2A-L-ER2D-L ER2G-L ER2J-L	VF	.95V 1.25V 1.70V	I <sub>FM</sub> = 2.0A;
Maximum DC Reverse Current At Rated DC Blocking Voltage	I <sub>R</sub>	5μΑ 0.35mA	T <sub>A</sub> = 25℃ T <sub>A</sub> = 125℃
Maximum Reverse Recovery Time	T <sub>rr</sub>	35ns	I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, I <sub>rr</sub> =0.25A
Typical Junction Capacitance	CJ	15pF	Measured at 1.0MHz, V <sub>R</sub> =4.0V

2 Amp Super Fast **Recovery Rectifier** 50 to 600 Volts


ER2A-L

ER2J-L

**THRU** 

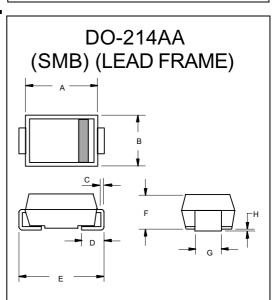

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.160	.185	4.06	4.70	
В	.130	.155	3.30	3.94	
С	.006	.012	0.15	0.31	
D	.030	.060	0.76	1.52	
E	.200	.220	5.08	5.59	
F	.079	.096	2.00	2.44	
G	.075	.087	1.91	2.21	
н	.002	.008	0.05	0.203	

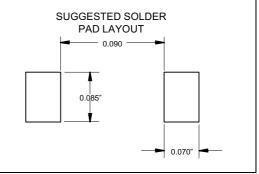


Notes: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7.


## www.mccsemi.com


# ER2A-L thru ER2J-L





#### Micro Commercial Components




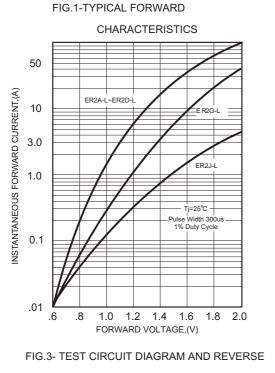




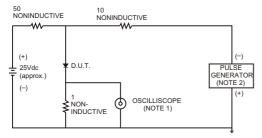







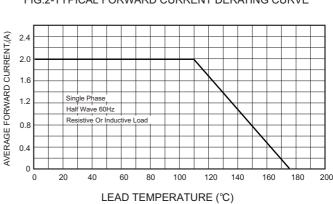



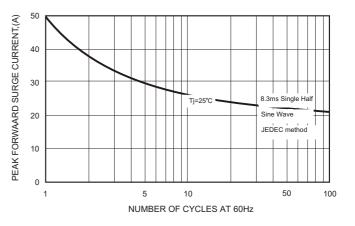



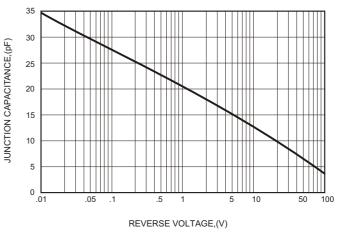

## www.mccsemi.com



### **Ordering Information :**

Device	Packing	
ER2A-LTP~ER2J-LTP	Tape&Reel: 3Kpcs/Reel	

Note : Adding "-HF" suffix for halogen free, eg. ER2A-LTP-HF~ER2J-LTP-HF

### **\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

# www.mccsemi.com