Technical Data Sheet

1.9mm Round Subminiature "Gull Wing"Lead Phototransistor

Features

- Fast response time
- High photo sensitivity
- Small junction capacitance
- Compatible with infrared and vapor phase reflow solder process.
- Pb free
- The product itself will remain within RoHS compliant version.

Descriptions

• PT91-21C/TR7 is a phototransistor in miniature SMD package which is molded in water clear plastic with spherical top view lens. The device is spectrally matched to infrared emitting diode.

Applications

- Miniature switch
- Counters and sorter
- Position sensor
- Infrared applied system

Device Selection Guide

LED Part No.	Chip Material	Lens Color
РТ	Silicon	Water clear


<u>PT91-21C/TR7</u>




Everlight Electronics Co., Ltd. Device No : DTT-091-004 http://www.everlight.com Prepared date : 07-26-2005 Rev 2 Page: 1 of 10 Prepared by : jaine tsai



Package Dimensions



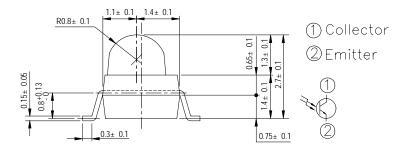

Notes: 1.All dimensions are in millimeters 2.Tolerances unless dimensions ±0.1mm

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units	
Collector-Emitter Voltage	V _{CEO}	30	V	
Emitter-Collector-Voltage	V _{ECO}	5	V	
Collector Current	I _C	20	mA	
Operating Temperature	T _{opr}	-25 ~ +85	°C	
Storage Temperature	T _{stg}	-40 ~ +85	°C	
Soldering Temperature	T_{sol}	260	°C	
Power Dissipation at(or below)	Pc	75	mW	
25°C Free Air Temperature				

Notes: *1:Soldering time \leq 5 seconds.

http://www.everlight.com Prepared date : 07-26-2005




Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition Min		Тур	Max	Unit
Rang Of Spectral Bandwidth	$\lambda_{0.5}$		400		1100	nm
Wavelength Of Peak Sensitivity	$\lambda_{ m P}$			940		nm
Collector-Emitter Breakdown Voltage	B _{VCEO}	$I_{C}=100\mu A$ Ee=0mW/cm ²	30			V
Emitter-Collector Breakdown Voltage	B _{VECO}	$I_E=100\mu A$ Ee=0mW/cm ²	5			V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =2mA Ee=1m W/cm ²			0.4	V
Collector Dark Current	I _{CEO}	V _{CE} =20V Ee=0mW/cm ²			100	nA
On State Collector Current	I _{C(ON)}	V _{CE} =5V Ee=1mW /cm ²	1.0	1.5		mA
Rise Time	t _r	V _{CE} =5V		15		
Fall Time	tf	$I_{C}=1mA$ R _L =1000Ω		15		μS



Typical Electro-Optical Characteristics Curves Fig.1Collector Power Dissipation vs.

Ambient Temperature

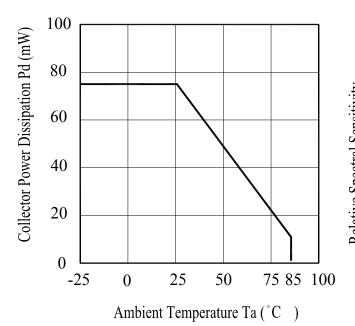






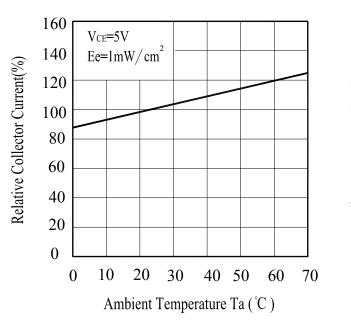


Fig.2 Spectral Sensitivity





Irradiance



Everlight Electronics Co., Ltd. Device No : DTT-091-004 http://www.everlight.com Prepared date : 07-26-2005 Rev 2 Page: 4 of 10 Prepared by : jaine tsai




Typical Electro-Optical Characteristics Curves

Fig.5 Collector Dark Current vs.

Ambient Temperature

Fig.6 Collector Current vs.

Collector-Emitter Voltage

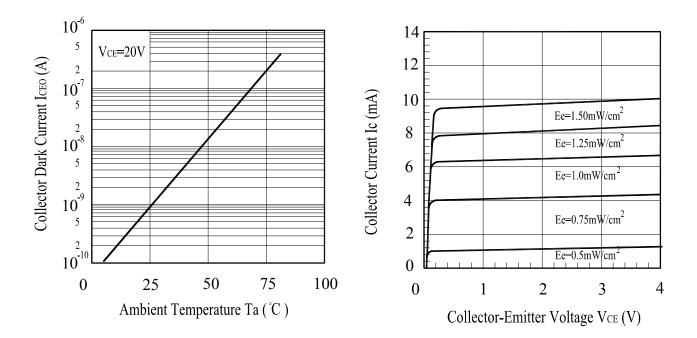




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30° C or less and 90° RH or less.
 - 2.3 The LEDs should be used within a year.
 - 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70° RH or less.
 - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

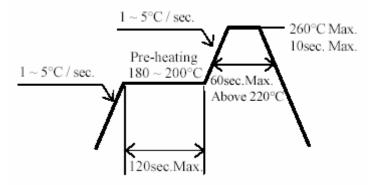

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

http://www.everlight.com Prepared date : 07-26-2005




4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

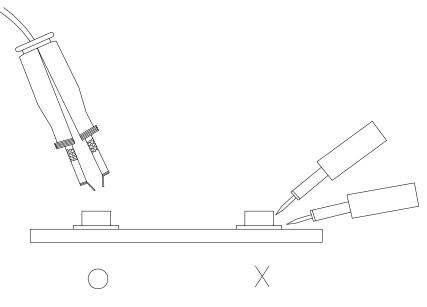



Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%


LTPD: 10%

NO.	Item	Test Conditions	Test Hours/	Sample	Failure	Ac/Re
			Cycles	Sizes	Judgement	
					Criteria	
1	REFLOW	TEMP. : $260^{\circ}C\pm 5^{\circ}C$	6Mins	22pcs		0/1
		5secs				
2	Temperature Cycle	H : 100°C 15mins	50Cycles	22pcs	$I_L {\leq} L { imes} 0.8$	0/1
		5mins				
		L : -40°C 15mins			L: Lower	
3	Thermal Shock	H :+100°C ▲ 5mins	50Cycles	22pcs	Specification	0/1
		▼ 10secs			Limit	
		$L:-10^{\circ}C$ 5mins				
4	High Temperature	TEMP. : +100°C	1000hrs	22pcs	-	0/1
	Storage			-		
5	Low Temperature	TEMP. : -40°C	1000hrs	22pcs		0/1
	Storage					
6	DC Operating Life	V _{CE} =5V	1000hrs	22pcs		0/1
7	High Temperature/	85°C / 85% R.H	1000hrs	22pcs		0/1
	High Humidity					


http://www.everlight.com Prepared date : 07-26-2005



Package Dimensions

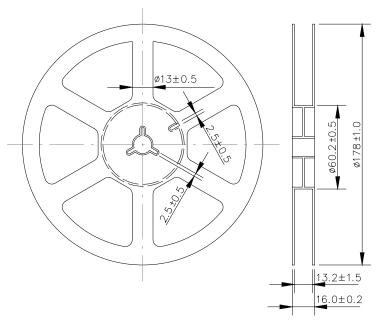

Loaded Quantity Per Reel 1000PCS/Reel

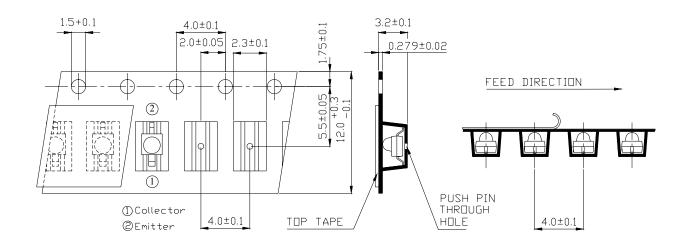

Unit :mm

Everlight Electronics Co., Ltd. Device No : DTT-091-004 http://www.everlight.com Prepared date : 07-26-2005 Rev 2 Page: 9 of 10 Prepared by : jaine tsai



Packing Quantity Specification

 $1.1000 Pcs/1 Volume \ , \ 1 Volume/1 Bag$

2.10Boxes/1Carton

Label Form Specification



CPN: Customer's Production Number P/N : Production Number QTY: Packing Quantity CAT: Ranks HUE: Peak Wavelength REF: Reference LOT No: Lot Number MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd,	Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306	
Tucheng, Taipei 236, Taiwan, R.O.C	http://www.everlight.com	

Everlight Electronics Co., Ltd. Device No : DTT-091-004 http://www.everlight.com Prepared date : 07-26-2005 Rev 2 Page: 10 of 10 Prepared by : jaine tsai