
# WH2002L Character20x2

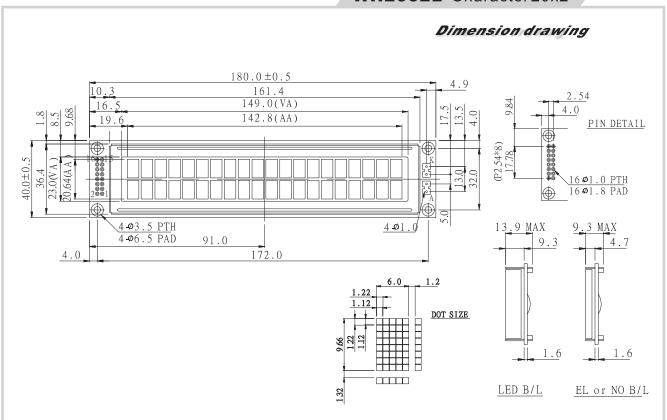

## Feature

- 1.5x8 dots includes cursor
- 2. Built-in controller (ST 7066 or Equivalent)
- 3.+5V power supply (Also available for +3V)
- 4. 1/16 duty cycle
- 5. LED can be driven by pin1,pin2,pin15,pin16 or A and K
- 6. N.V. optional for +3V power supply

Pin NO.	Symbol	Function
1	Vss	GND
2	Vdd	+3V or + 5V
3	Vo	Contrast Adjustment
4	RS	H/L Register select signal
5	$R/\overline{W}$	H/L Read / write signal
6	Е	H→L Enable signal
7	DB0	H/L Data bus line
8	DB1	H/L Data bus line
9	DB2	H/L Data bus line
10	DB3	H/L Data bus line
11	DB4	H/L Data bus line
12	DB5	H/L Data bus line
13	DB6	H/L Data bus line
14	DB7	H/L Data bus line
15	A/Vee	+4.2V for LED(RA=OΩ)/Negative Voltage output
16	K	Power supply for B/L (0V)

## Mechanical Data

Item	Standard Value	Unit
Module Dimension	180.0x40.0	mm
Viewing Area	149.0x23.0	mm
Mounting hole	172.0x 32.0	mm
Character Size	6.0x9.66	mm

#### Absolute Maximum Rating

Item	Symbol	Stan	Unit				
item	Syllibol	min.	typ.	max.	Omi		
Power Supply	VDD-VSS	-0.3		7.0	٧		
Input Voltage	VI	-0.3		VDD	V		

Note : VSS=0 Volt, VDD=5.0 Volt.

# Electronical Characteristics

Liettionical Gharacteristics												
Item	Cumahal	Condition	Stan									
item	Symbol	Condition	min.	typ.	max.	Unit						
Innut\/altaga	VDD	VDD=+5V	4.7	5.0	5.3	>						
Input Voltage	VDD	VDD=+3V	2.7	3.0	5.3	>						
Supply Current IDD		VDD=5V		1.5	1.8	mA						
	VDD-V0	-20°C	5.0	5.1	5.7							
Recommended LC Driving		0°C	4.6	4.8	5.2							
Voltage for Normal Temp.		25°C	4.1	4.5	4.7	٧						
Version module		50°C	3.9	4.2	4.5							
		70°C	3.7	3.9	4.3							
LED Forward Voltage	VF	25°C		4.2	4.6	>						
LED Forward Current	IF	25°C		360	720	mA						
EL Power Supply Current	IEL	Ve <b>l</b> =110VAC;400Hz			5.0	mA						

### Display Character Address Code:

Display position	1	2	3	4	5	6	7	8	9	10	11	12	13	 	20
DD RAM Address	00	01													13
DD RAM Address	40	41													53



type