



SMALL SIGNAL SCHOTTKY BARRIES SWITCHING DIODES


VOLTAGE 20 to 40 Volt CURRENT 0.35 Ampere

FEATURES

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Low Reverse Recovery Time
- Low Reverse Capacitance
- Lead free in compliance with EU RoHS 2011/65/EU directive

MECHANICAL DATA

- Case: Molded Glass MINI MELF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: See Diagram Below
- Approx. Weight: 0.001 ounces, 0.03 grams

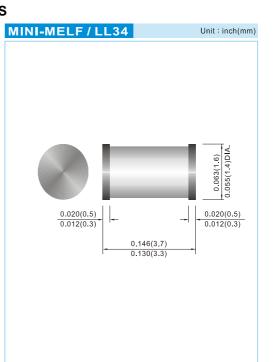

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TJ=25°C unless otherwise noted)

PARAMETER	SYMBOL	LLSD103A	LLSD103B	LLSD103C	UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	40	30	20	V
RMS Reverse Voltage	V _{rms}	28	21 14		V
Max. Average Rectified Current	I _{F(AV)}		mA		
Peak Forward Surge Current, t <u><</u> 0.3ms	I _{FSM}		A		
Power Dissipation Derate Above 25ºC	P _D		mW		
Maximum Forward Voltage, I _F = 20mA I _F = 200mA	V _F		V		
Maximum Reverse Current	I _R	5@30V	5@20V 5@10V		μA
Typical Junction Capacitance(Note 1)	C		рF		
Typical Reverse Recovery (Note 2)	t _{rr}		ns		
Typical Thermal Resistance	R _{eja}		°C / W		
Storage Temperature Range	T _{stg}		°C		

NOTE:


1. CJ at VR=0, f=1MHZ

2. From IF=50mA to IR=200mA, RL=100 Ω






RATING AND CHARACTERISTIC CURVES

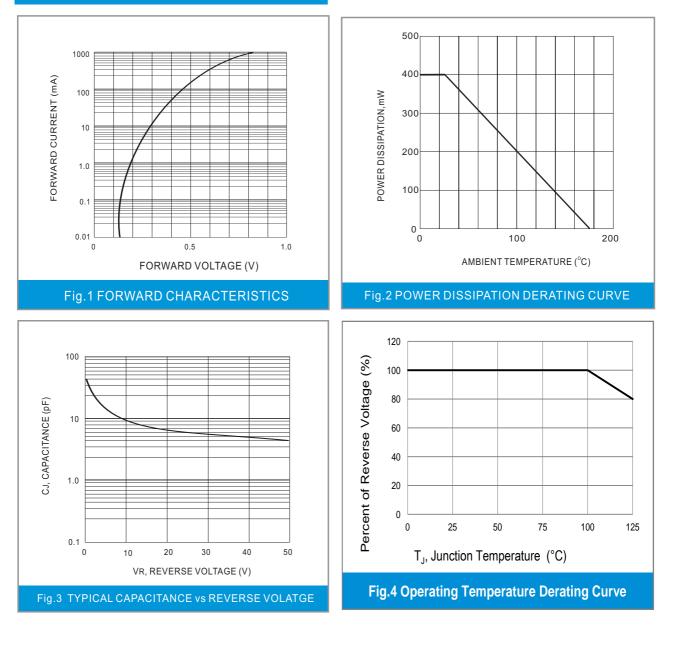





MOUNTING PAD LAYOUT

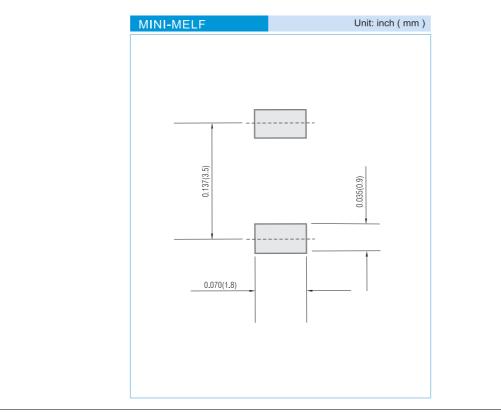

ORDER INFORMATION

Packing information
T/R - 10K per 13" plastic Reel
T/R - 2.5K per 7" plastic Reel






Part No_packing code_Version

LLSD103A_R1_10001 LLSD103A_R2_10001

For example :

RB500V-40_R2_00001





• Packing type means T/R

Packing Code XX					Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code		
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number		
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number		
Bulk Packing (B/P)	В	13"	2					
Tube Packing (T/P)	т	26mm	X					
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y					
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U					
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D					





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.