Pai Semi

Enhanced ESD, 3.0 kV rms 10Mbps Single-Channel Digital Isolators

Data Sheet

FEATURES

Ultra-low power consumption (1Mbps): 0.75mA/Channel High data rate: 10Mbps High common-mode transient immunity: 75 kV/µs typical High robustness to radiated and conducted noise Low propagation delay: 8 ns typical for 5 V operation 9 ns typical for 3.3 V operation Isolation voltages: AC 3000Vrms High ESD rating: ESDA/JEDEC JS-001-2017 Human body model (HBM) ±8kV Safety and regulatory approvals: UL certificate number: E494497 3000Vrms for 1 minute per UL 1577 **CSA Component Acceptance Notice 5A** VDE certificate number: 40053041 DIN VDE V 0884-11:2017-01 VIORM = 565V peak CQC certification per GB4943.1-2011 3 V to 5.5 V level translation Wide temperature range: -40°C to 125°C 8-lead, RoHS-compliant, SOIC package APPLICATIONS **General-purpose Single-channel isolation** Industrial field bus **Isolation Industrial automation systems**

Isolated switch mode supplies Isolated ADC, DAC

Motor control

GENERAL DESCRIPTION

The $\pi 1 xxxxx$ is a 2PaiSemi digital isolators product family that includes over hundreds of digital isolator products. By using maturated standard semiconductor CMOS technology and 2PaiSEMI *iDivider*[®] technology, these isolation components provide outstanding performance characteristics and reliability superior to alternatives such as optocoupler devices and other integrated isolators.

Intelligent voltage divider technology (*iDivider*[®] technology) is a new generation digital isolator technology invented by 2PaiSEMI. It uses the principle of capacitor voltage divider to transmit voltage signal directly cross the isolator capacitor without signal modulation and demodulation.

The π 1xxxxx isolator data channels are independent and are available in a variety of configurations with a withstand voltage rating of 1.5 kV rms to 6.0 kV rms and the data rate from DC up to

600Mbps (see the Ordering Guide). The devices operate with the supply voltage on either side ranging from 3.0 V to 5.5 V, providing compatibility with lower voltage systems as well as enabling voltage translation functionality across the isolation barrier. The fail-safe state is available in which the outputs transition to a preset state when the input power supply is not applied.

π110M3

FUNCTIONAL BLOCK DIAGRAMS

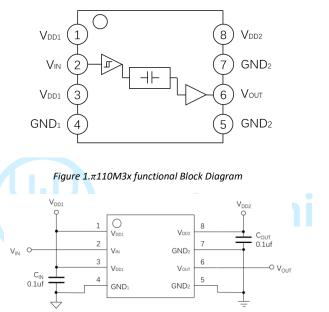


Figure 2.π110M3x Typical Application Circuit

Rev.1.8

Information furnished by 2Pai semi is believed to be accurate and reliable. However, no responsibility is assumed by 2Pai semi for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of 2Pai semi. Trademarks and registered trademarks are the property of their respective owners.

PIN CONFIGURATIONS AND FUNCTIONS

Table $1.\pi 110M3x$ Pin Function Descriptions

Pin No.	Name	Description
1	V _{DD1}	Supply Voltage for Isolator Side 1.
2	VIN	Logic Input.
3	V _{DD1}	Supply Voltage for Isolator Side 1.
4	GND ₁	Ground 1. This pin is the ground reference for Isolator Side 1.
5	GND ₂	Ground 2. This pin is the ground reference for Isolator Side 2.
6	Vout	Logic Output.
7	GND ₂	Ground 2. This pin is the ground reference for Isolator Side 2.
8	V _{DD2}	Supply Voltage for Isolator Side 2.




Figure 3. π 110M3x Pin Configuration

ABSOLUTE MAXIMUM RATINGS

 $T_A = 25$ °C, unless otherwise noted.

Table 2.Absolute Maximum Ratings⁴

Parameter	Rating			
Supply Voltages (V _{DD1} -GND ₁ , V _{DD2} -GND ₂)	–0.5 V to +7.0 V			
Input Voltages ¹	–0.5 V to V _{DDx} + 0.5 V			
Output Voltages ¹	-0.5 V to V _{DDx} + 0.5 V			
Average Output Current per Pin ² Side 1 Output Current (I ₀₁)	–10 mA to +10 mA			
Average Output Current per Pin ² Side 2 Output Current (I ₀₂)	–10 mA to +10 mA			
Common-Mode Transients Immunity ³	-200 kV/µs to +200 kV/µs			
Storage Temperature (T _{ST}) Range	-65°C to +150°C			
Ambient Operating Temperature (T _A) Range	-40°C to +125°C			

Notes:

 $^1\,V_{\text{DDx}}$ is the side voltage power supply V_DD, where x = 1 or 2.

² See Figure 4 for the maximum rated current values for various temperatures.

³ See Figure 11 for Common-mode transient immunity (CMTI) measurement.

⁴ Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Тур	Max	Unit
Supply Voltage	V _{DDx} ¹	3		5.5	V
High Level Input Signal Voltage	VIH	0.7*V _{DDx} ¹		V _{DDx} ¹	V
Low Level Input Signal Voltage	VIL	0		0.3*V _{DDx} ¹	V
High Level Output Current	Іон	-6			mA
Low Level Output Current	lol			6	mA
Data Rate		0		10	Mbps
Junction Temperature	ΤJ	-40		150	°C
Ambient Operating Temperature	T _A	-40		125	°C

Table 3 Recommended Operating Conditions

Notes:

 1 V_{DDx} is the side voltage power supply V_{DD}, where x = 1 or 2.

Table 4. π 110xxx Truth Table

V _{Ix} Input ¹	V_{DDI} State ¹	V _{DDO} State ¹	Default Low Vox Output ¹	Default High Vox Output ¹	Test Conditions /Comments
Low	Powered ²	Powered ²	Low	Low	Normal operation
High	Powered ²	Powered ²	High	High	Normal operation
Open	Powered ²	Powered ²	Low	High	Default output
Don't Care ⁴	Unpowered ³	Powered ²	Low	High	Default output⁵
Don't Care ⁴	Powered ²	Unpowered ³	High Impedance	High Impedance	

Notes:

 $^{1}V_{lx}/V_{0x}$ are the input/output signals of a given channel (A or B). V_{DDI}/V_{DD0} are the supply voltages on the input/output signal sides of this given channel.

 2 Powered means V_DDx ≥ 2.95 V

 3 Unpowered means V_{DDx} < 2.30V

⁴ Input signal (V_{lx}) must be in a low state to avoid powering the given V_{DDl} ¹ through its ESD protection circuitry.

⁵ If the V_{DDI} goes into unpowered status, the channel outputs the default logic signal after around 1us. If the V_{DDI} goes into powered status, the channel outputs the input status logic signal after around 1us.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Table 5.Switching Specifications

 $V_{DD1} - V_{GND1} = V_{DD2} - V_{GND2} = 3.3V_{DC} \pm 10\%$ or $5V_{DC} \pm 10\%$, $T_A = 25^{\circ}C$, unless otherwise noted.

Parameter	Symbol	Min	Тур	Max	Unit	Test Conditions/Comments
Minimum Pulse Width	PW			100	ns	Within pulse width distortion (PWD) limit
Maximum Data Rate		10			Mbps	Within PWD limit
Propagation Dolay Time1		5.5	8	12.5	ns	@ 5V _{DC} supply
Propagation Delay Time ¹	tpнL, tpLH	6.5	9	13.5	ns	@ 3.3V _{DC} supply
Pulse Width Distortion	PWD	0	0.3	3.0	ns	The max different time between t_{pHL} and t_{pLH} @ $5V_{DC}$ supply. And The value is $ t_{pHL} - t_{pLH} $
		0	0.3	3.0	ns	@ 3.3V _{DC} supply
Part to Part Propagation Delay Skew	tрsk			2	ns	The max different propagation delay time between any two devices at the same temperature, load and voltage @ 5V _{DC} supply
				2	ns	@ 3.3V _{DC} supply
Output Signal Rise/Fall Time ⁴	t _r /t _f		1.5		ns	See Figure 7.
Dynamic Input Supply Current per Channel	DDI (D)		9		μA /Mbps	Inputs switching, 50% duty cycle square wave, CL = 0 pF @ 5V _{DC} Supply
Dynamic Output Supply Current per Channel	Iddo (d)		38		μA /Mbps	Inputs switching, 50% duty cycle square wave, $CL = 0 \text{ pF} @ 5V_{DC}$ Supply
Dynamic Input Supply Current per Channel	Iddi (d)		5		μA /Mbps	Inputs switching, 50% duty cycle square wave, $CL = 0 \text{ pF } @ 3.3V_{DC}$ Supply
Dynamic Output Supply Current per Channel	Iddo (d)		23		μA /Mbps	Inputs switching, 50% duty cycle square wave, $CL = 0 \text{ pF } @ 3.3V_{DC}$ Supply
Common-Mode Transient Immunity ³	CMTI		75		kV/μs	$V_{IN} = V_{DDx}^2$ or 0V, $V_{CM} = 1000$ V
littor			120		ps p-p	Coo the litter Measurement costion
Jitter		20		ps rms	See the Jitter Measurement section	
ESD(HBM - Human body model)	ESD		±8		kV	

Notes:

 $^{1}t_{pLH}$ = low-to-high propagation delay time, t_{pHL} = high-to-low propagation delay time. See Figure 8.

 $^2\,V_{\text{DDx}}$ is the side voltage power supply $V_{\text{DD}},$ where x = 1 or 2.

 $^{\scriptscriptstyle 3}$ See Figure 11 for Common-mode transient immunity (CMTI) measurement.

⁴ tr means is the time from 10% amplitude to 90% amplitude of the rising edge of the signal, tf means is the time from 90% amplitude to 10% amplitude of the falling edge of the signal.

Table 6.DC Specifications

VDD1 - VGND1 = VDD2 - VGND2 = 3.3VDC±10% or 5VDC±10%, TA=25°C, unless otherwise noted.

	Symbol	Min	Тур	Max	Unit	Test Conditions/Comments
Rising Input Signal Voltage Threshold	V _{IT+}		$0.6*V_{DDx}^{1}$	0.7*V _{DDx} ¹	V	
Falling Input Signal Voltage Threshold	VIT-	0.3* V _{DDX} ¹	$0.4* V_{DDX}^1$		V	
Lligh Lovel Output Veltage	V _{OH} ¹	V _{DDx} - 0.1	V _{DDx}		V	–20 μA output current
High Level Output Voltage	VOH -	V _{DDx} - 0.2	V _{DDx} - 0.1		V	-2 mA output current
Low Lovel Output Veltage	Mar		0	0.1	V	20 μA output current
Low Level Output Voltage	Vol		0.1	0.2	V	2 mA output current
Input Current per Signal Channel	l _{IN}	-10	0.5	10	μΑ	$0 V \leq Signal voltage \leq V_{DDX}^{1}$
V _{DDx} ¹ Undervoltage Rising Threshold	VDDxUV+	2.45	2.75	2.95	V	
V _{DDx} ¹ Undervoltage Falling Threshold	VDDxUV-	2.30	2.60	2.75	V	
V _{DDx} ¹ Hysteresis	VDDxUVH		0.15		V	

Notes:

 $^1\,V_{\text{DDx}}$ is the side voltage power supply V_DD, where x = 1 or 2.

Table 7. Quiescent Supply Current

VDD1 - VGND1 = VDD2 - VGND2 = 3.3VDC±10% or 5VDC±10%, TA=25°C, CL = 0 pF, unless otherwise noted.

Part	Symbol	Min	Тур	Max	Unit	Test (Conditions	
Fait	Symbol	IVIIII	тур	IVIAX	Onic	Supply voltage	Input signal	
	DD1 (Q)	0.06	0.08	0.10	mA		VI=0V for π110M30 VI=5V for π110M31	
	DD2 (Q)	0.47	0.59	0.76	mA	5V _{DC}		
	DD1 (Q)	0.15	0.19	0.25	mA	JVDC	VI=5V for π110M30	
π110M3x	DD2 (Q)	0.44	0.55	0.72	mA		VI=0V for π110M31	
NITONI2X	DD1 (Q)	0.06	0.08	0.10	mA		VI=0V for π110M30	
	DD2 (Q)	0.46	0.58	0.75	mA	2 21/	VI=3.3V for <i>π</i> 110M31	
	DD1 (Q)	0.11	0.14	0.18	mA	3.3V _{DC}	VI=3.3V for <i>π</i> 110M30	
	DD2 (Q)	0.43	0.53	0.69	mA		VI=0V for π110M31	

Table 8.Total Supply Current vs. Data Throughput (CL = 0 pF)

VDD1 - VGND1 = VDD2 - VGND2 = 3.3VDC±10% or 5VDC±10%, TA=25°C, CL = 0 pF, unless otherwise noted.

Part Sym	Symbol	150 Kbps				1 Mbps			10 Mbps			Supply	
	Symbol	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Unit	voltage	
	DD1		0.12	0.18		0.13	0.20		0.30	0.50	mA	~ ^	F)/
-110142.	DD2		0.57	0.86		0.61	0.92		1.06	1.58		5V _{DC}	
π110M3x	DD1		0.10	0.15		0.11	0.17		0.16	0.24		2.21/	
	IDD2		0.56	0.84		0.58	0.87		0.86	1.29	mA	3.3V _{DC}	

INSULATION AND SAFETY RELATED SPECIFICATIONS

Table 9. Insulation Specifications

Parameter	Symbol	Value	Unit	Test Conditions/Comments
Rated Dielectric Insulation Voltage		3000	V rms	1-minute duration
Minimum External Air Gap (Clearance)	L (CLR)	≥4	mm	Measured from input terminals to output terminals, shortest distance through air
Minimum External Tracking (Creepage)	L (CRP)	≥4	mm	Measured from input terminals to output terminals, shortest distance path along body
Minimum Internal Gap (Internal Clearance)		≥11	μm	Insulation distance through insulation
Tracking Resistance (Comparative Tracking Index)	СТІ	>400	V	DIN EN 60112 (VDE 0303-11):2010-05
Material Group		II		IEC 60112:2003 + A1:2009

PACKAGE CHARACTERISTICS

Table 10.Package Characteristics

Parameter	Symbol	Typical Value	Unit	Test Conditions/Comments
Resistance (Input to Output) ¹	Rio	1011	Ω	
Capacitance (Input to Output) ¹	Сю	0.6	pF	@1MHz
Input Capacitance ²	Cı	3.0	pF	@1MHz
IC Junction to Ambient Thermal	0	100	°C/W	Thermocouple located at center of package
Resistance	ALθ	100	C/ VV	underside

Notes:

¹The device is considered a 2-terminal device; SOIC-8 Pin 1 - Pin 4 are shorted together as the one terminal, and SOIC-8 Pin 5 - Pin 8 are shorted together as the other terminal.

²Testing from the input signal pin to ground.

REGULATORY INFORMATION

See Table 11 for details regarding recommended maximum working voltages for specific cross isolation waveforms and insulation levels. Table 11.Regulatory

Regulatory	π110M3x
	Recognized under UL 1577
	Component Recognition Program ¹
UL	Single Protection, 3000 V rms Isolation Voltage
	File (E494497)
	DIN VDE V 0884-11:2017-01
VDE	Basic insulation, V _{IORM} = 565V peak, V _{IOSM} = 3615 V peak
	File (40053041)
	Certified under CQC11-471543-2012, GB4943.1-2011
	Basic insulation at 500 V rms (707 V peak) working voltage
CQC	Reinforced insulation at 250 V rms (353 V peak)
	NB SOIC-8 File (CQC20001260211)

Notes:

¹ In accordance with UL 1577, each π 110M3x is proof tested by applying an insulation test voltage \geq 3600 V rms for 1 sec

² In accordance with DIN V VDE V 0884-11, each π110M3x is proof tested by applying an insulation test voltage ≥ 848V peak for 1 sec (partial discharge detection limit = 5 pC).

DIN V VDE V 0884-11 (VDE V 0884-11) INSULATION CHARACTERISTICS

Table 12.VDE Insulation Characteristics

Description	Test Conditions/Comments	Symbol	Characteristic	Unit
Installation Classification per DIN VDE 0110				
For Rated Mains Voltage ≤ 150 V rms			l to IV	
For Rated Mains Voltage ≤ 300 V rms			l to III	
For Rated Mains Voltage ≤ 400 V rms			l to III	
Climatic Classification			40/105/21	
Pollution Degree per DIN VDE 0110, Table 1			2	
Maximum repetitive peak isolation voltage		VIORM	565	Vpeak
Input to Output Test Voltage, Method B1	$V_{IORM} \times 1.5 = V_{pd (m)}, 100\%$ production test, $t_{ini} = t_m = 1$ sec, partial discharge < 5 pC	Vpd (m)	848	Vpeak
Input to Output Test Voltage, Method A				
After Environmental Tests Subgroup 1	$V_{IORM} \times 1.2 = V_{pd (m)}, t_{ini} = 60 \text{ sec, } t_m$ = 10 sec, partial discharge < 5 pC	V _{pd (m)}	678	Vpeak
After Input and/or Safety Test Subgroup 2 and	$V_{IORM} \times 1.2 = V_{pd (m)}$, $t_{ini} = 60 \text{ sec}$, t_m		678	Vpeak
Subgroup 3	= 10 sec, partial discharge < 5 pC		0,0	· peak
Highest Allowable Overvoltage		VIOTM	4200	Vpeak

π110M3

Description	Test Conditions/Comments	Symbol	Characteristic	Unit	
Surge Isolation Voltage Basic	Basic insulation, 1.2/50 μs combination wave, VTEST = 1.3 × VIOSM (qualification) ¹	Viosm	3615	Vpeak	
Safety Limiting Values	Maximum value allowed in the event of a failure (see <i>Figure 4</i>)				
Maximum Safety Temperature		Ts	150	°C	
Maximum Power Dissipation at 25°C		Ps	1.25	W	
Insulation Resistance at Ts	V _{IO} = 500 V	Rs	>109	Ω	

Notes:

¹In accordance with DIN V VDE V 0884-11, π 1xxx3x is proof tested by applying a surge isolation voltage 4700 V.

Typical Thermal Characteristic





Figure 4. Thermal Derating Curve, Dependence of Safety Limiting Values with Ambient Temperature per VDE





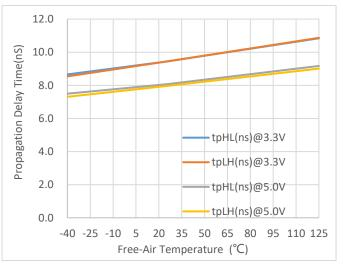


Figure 6. Propagation Delay Time vs. Free-Air Temperature

Timing test information

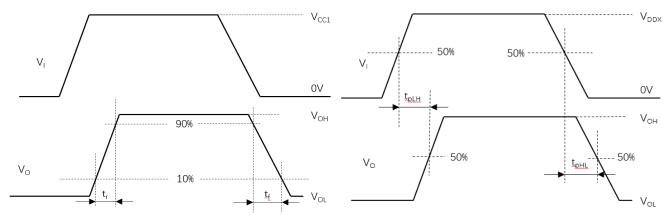


Figure 7.Transition time waveform measurement

Figure 8. Propagation delay time waveform measurement



π110M3

APPLICATIONS INFORMATION

OVERVIEW

The $\pi 1 \times \times \times \times a$ are 2PaiSemi digital isolators product family based on 2PaiSEMI unique *iDivider*[®] technology. Intelligent voltage **Divider** technology (*iDivider*[®] technology) is a new generation digital isolator technology invented by 2PaiSEMI. It uses the principle of capacitor voltage divider to transmit signal directly cross the isolator capacitor without signal modulation and demodulation. Compare to the traditional Opto-couple technology, icoupler technology, OOK technology, *iDivider*[®] is a more essential and concise isolation signal transmit technology which leads to greatly simplification on circuit design and therefore significantly improves device performance, such as lower power consumption, faster speed, enhanced anti-interference ability, lower noise.

By using maturated standard semiconductor CMOS technology and the innovative *iDivider*[®] design, these isolation components provide outstanding performance characteristics and reliability superior to alternatives such as optocoupler devices and other integrated isolators. The $\pi 1 \times \times \times \times$ isolator data channels are independent and are available in a variety of configurations with a withstand voltage rating of 1.5 kV rms to 5.0 kV rms and the data rate from DC up to 600Mbps (see the Ordering Guide).

The π 110M3x are the outstanding 10 Mbps single-channel digital isolators with the enhanced ESD capability. the devices transmit data across an isolation barrier by layers of silicon dioxide isolation.

The devices operate with the supply voltage on either side ranging from 3.0 V to 5.5 V, offering voltage translation of 3.3 V, and 5 V logic. The π 110M3x have very low propagation delay and high speed. The input/output design techniques allow logic and supply voltages over a wide range from 3.0 V to 5.5 V, offering voltage translation of 3.3 V, and 5 V logic. The architecture is designed for high common-mode transient immunity and high immunity to electrical noise and magnetic interference.

See the Ordering Guide for the model numbers that have the failsafe output state of low or high.

PCB LAYOUT

The low-ESR ceramic bypass capacitors must be connected between V_{DD1} and GND_1 and between V_{DD2} and GND_2 . The bypass capacitors are placed on the PCB as close to the isolator device as possible. The recommended bypass capacitor value is between 0.1 μF and 10 μF . To enhance the robustness of a design, the user may also include resistors (50–300 Ω) in series with the inputs and outputs if the system is excessively noisy.

Avoid reducing the isolation capability, Keep the space underneath the isolator device free from metal such as planes, pads, traces and vias.

To minimize the impedance of the signal return loop, keep the solid ground plane directly underneath the high-speed signal path, the closer the better. The return path will couple between the nearest ground plane to the signal path. Keep suitable trace width for controlled impedance transmission lines interconnect.

To reduce the rise time degradation, keep the length of input/output signal traces as short as possible, and route low inductance loop for the signal path and It's return path.




Figure 9.Recommended Printed Circuit Board Layout

JITTER MEASUREMENT

The eye diagram shown in the figure below provides the jitter measurement result for the π 110M3x. The Keysight 81160A pulse function arbitrary generator works as the data source for the π 110M3x, which generates 10Mbps pseudo random bit sequence (PRBS). The Keysight DSOS104A digital storage oscilloscope captures the π 110M3x output waveform and recoveries the eye diagram with the SDA tools and eye diagram analysis tools. The result shows a typical measurement jitter data.




Figure 10.π110M3x Eye Diagram

CMTI MEASUREMENT




Figure 11.Common-mode transient immunity (CMTI) measurement

To measure the Common-Mode Transient Immunity (CMTI) of $\pi 1xxxxx$ isolator under specified common-mode pulse magnitude (VCM) and specified slew rate of the common-mode pulse (dVCM/dt) and other specified test or ambient conditions, The common-mode pulse generator (G1) will be capable of providing fast rise and fall pulses of specified magnitude and duration of the common-mode pulse (VCM), such that the maximum common-mode slew rates (dVCM/dt) can be applied to $\pi 1xxxxx$ isolator coupler under measurement. The common-mode pulse is applied between one side ground GND1 and the other side ground GND2 of $\pi 1xxxxx$ isolator, and shall be capable of providing positive transients as well as negative transients.

OUTLINE DIMENSIONS

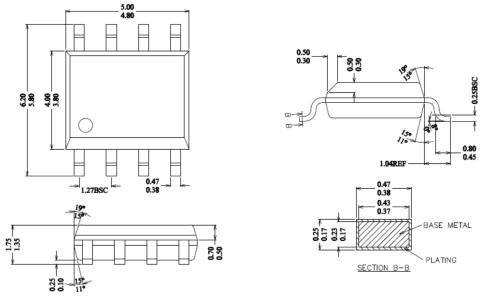


Figure 12.8-Lead Narrow Body SOIC [NB SOIC-8] Package-dimension unit(mm)

Land Patterns

8-Lead Narrow Body SOIC [NB SOIC-8]

The figure below illustrates the recommended land pattern details for the π 1xxxxx in an 8-pin narrow-body SOIC. The table below lists the values for the dimensions shown in the illustration.




Figure 13.8-Lead Narrow Body SOIC [NB SOIC-8] Land Pattern

Table 13.8-Lead Narrow Body SOIC Land Pattern Dimensions

Dimension	Feature	Parameter	Unit	
C1	C1 Pad column spacing 5.40		mm	
E	Pad row pitch	1.27	mm	
X1	Pad width	0.60	mm	
Y1	Pad length	1.55	mm	

Note:

1. This land pattern design is based on IPC -7351.


2.All feature sizes shown are at maximum material condition and a card fabrication tolerance of 0.05 mm is assumed.

Top Marking



Line 1	Product name		
Line 2	YY = Work Year		
	WW = Work Week		
	ZZ=Manufacturing code from assembly house		
Line 3 XXXX, no special meaning			
Figure 14.Top Making			

REEL INFORMATION

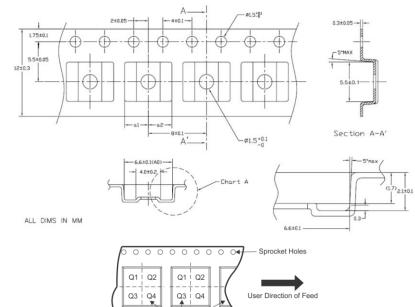

Note: The Pin 1of the chip is in the quadrant Q1 Figure 15.NB SOIC-8 Reel Information-dimension unit(mm)

ORDERING GUIDE

Model 1 Name ¹	Temperature Range	No. of Inputs, V _{DD1} Side	No. of Inputs, V _{DD2} Side	Isolation Rating (kV rms)	Fail-Safe Output State	Package	MSL Peak Temp ²	MOQ/ Quantity per reel ³
π110M31	-40~125°C	1	0	3	High	NB SOIC-8	Level-3-260C-168 HR	4000
π110M30	-40~125°C	1	0	3	Low	NB SOIC-8	Level-3-260C-168 HR	4000

Note:


 $^{\rm 1.}$ Pai1xxxxx is equals to $\pi {\rm 1xxxxx}$ in the customer BOM

² MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Pocket Quadrants

^{3.} MOQ, minimum ordering quantity.

PART NUMBER NAMED RULE

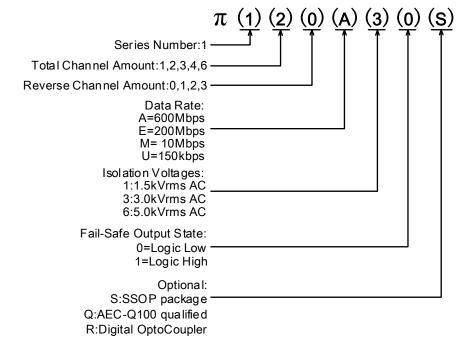

Notes:Pai1xxxxx is equals to π 1xxxxx in the customer BOM

Figure 16. Part Number Named Rule

IMPORTANT NOTICE AND DISCLAIMER

2Pai semi intends to provide customers with the latest, accurate, and in-depth documentation. However, no responsibility is assumed by 2Pai semi for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Characterization data, available modules, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. 2Pai semi reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. 2Pai semi shall have no liability for the consequences of use of the information supplied herein.

Trademarks and registered trademarks are the property of their respective owners. This document does not imply, or express copyright licenses granted hereunder to design or fabricate any integrated circuits.

Room 307-309, No.22, Boxia Road, Pudong New District, Shanghai, 201203, China 021-50850681

2Pai Semiconductor Co., Limited. All rights reserved.

http://www.rpsemi.com/

REVISION HISTORY

Revision	Date	Page	Change Record			
1.0	2018/09/17	All	Initial version			
1.1	2018/11/28	P11	Changed the recommended bypass capacitor value.			
1.2	2019/09/08	Page1	Changed the contact address. Add <i>iDivider</i> technology description in General Description. Changed propagation delay time, CMTI and HBM ESD. Added WB SOIC-16 Lead information.			
1.3	2019/12/20	Page1,11,14	Changed description of π 1xxx6x.			
1.4	2020/02/16	Page1	Changed propagation delay time.			
1.5	2020/02/25	Page5	Changed Pulse Width Distortion.			
1.6	2020/03/16	Page6	Changed VDDx Undervoltage Threshold and Regulatory Information. Added information of Land Patterns and Top Marking			
1.7	2020/04/16	Page12	Optimize description and format to make it consistent with the Chinese version.			
1.8	2021/05/17	Page 11	Changed part number named rule			

