



# **Power Resistor Thick Film Technology**



#### **FEATURES**

 100 W at 25 °C case temperature heatsink mounted




- Direct mounting ceramic on heatsink
- Broad resistance range: 0.015  $\Omega$  to 1 M $\Omega$
- RoHS COMPLIANT

- Non inductive
- TO-247 package: compact and easy to mount
- AEC-Q200 qualified
- Material categorization: for definitions of compliance please see <a href="https://www.vishay.com/doc?99912">www.vishay.com/doc?99912</a>

### **LINKS TO ADDITIONAL RESOURCES**



LTO series are the extension of RTO types. We used the direct ceramic mounting design (no metal tab) of our RCH power resistors applied to semiconductor packages.

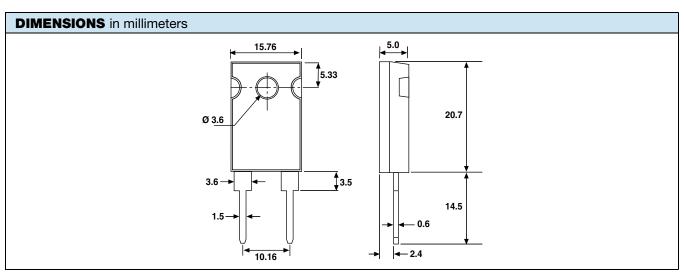

#### Note

• Tolerances unless stated: ± 0.3 mm

STANDARD ELECTRICAL SPECIFICATIONS							
MODEL	SIZE	RESISTANCE RANGE Ω	RATED POWER  P <sub>25 °C</sub> W	LIMITING ELEMENT VOLTAGE U <sub>L</sub> V	TOLERANCE ± %	TEMPERATURE COEFFICIENT ± ppm/°C	CRITICAL RESISTANCE
LTO 100	TO-247	0.015 to < 0.2	100	500	5, 10	350, 900	n/a
LTO 100	TO-247	0.2 to 1M	100	500	1, 2, 5, 10	200, 350	2.5 K

MECHANICAL SPECIFICATIONS					
Mechanical Protection Molded					
Resistive Element	Thick film				
Substrate	Alumina				
Connections	Tinned copper				
Weight	3.5 g max.				
Mounting Torque	1 Nm				

ENVIRONMENTAL SPECIFICATIONS				
Temperature Range	-55 °C to +175 °C			
Climatic Category	55 / 175 / 56			
Flammability	IEC 60695-11-5 Application time: $t_a = 10 \text{ s}$ Burning duration: $t_b < 30 \text{ s}$			



# Vishay Sfernice

TECHNICAL SPECIFICATIONS				
Dissipation and Associated	Onto a heatsink			
Power Rating and Thermal Resistance of the Component	100 W at +25 °C (case temp.)  R <sub>TH (j - c)</sub> : 1.5 °C/W  Free air:  3.5 W at +25 °C			
Temperature Coefficient	See Performance table ± 150 ppm/°C			
Dielectric Strength MIL STD 202	3000 V <sub>RMS</sub> - 1 min 10 mA max.			
Insulation Resistance	≥ 10 <sup>4</sup> MΩ			
Inductance	≤ 0.1 µH			

PERFORMANCE				
TESTS	CONDITIONS	REQUIREMENTS		
Momentary Overload	EN 60115-1 1.5 Pr/5 s U <sub>S</sub> < 1.5 U <sub>L</sub>	± (0.5 % + 0.005 Ω)		
Load Life	EN 60115-1 1000 h Pr at +25 °C	$\pm (0.5 \% + 0.005 \Omega)$		
High Temperature Exposure	AEC-Q200 rev. D conditions: MIL-STD-202 method 108 1000 h, +175 °C, unpowered	$\pm (0.25 \% + 0.005 \Omega)$		
Temperature Cycling	AEC-Q200 rev. D conditions: JESD22 method JA-104 1000 cycles, -55 °C to +125 °C dwell time -15 min	$\pm (0.5 \% + 0.005 \Omega)$		
Biased Humidity	AEC-Q200 rev. D conditions: MIL-STD-202 method 103 1000 h, 85 °C, 85 % RH	± (1 % + 0.005 Ω)		
Operational Life	AEC-Q200 rev. D conditions: MIL-STD-202 method 108 2000 h, 90/30, powered, +125 °C	$\pm$ (0.5 % + 0.005 $\Omega$ )		
ESD Human Body Model	AEC-Q200 rev. D conditions: AEC-Q200-002 25 kV <sub>AD</sub>	± (0.5 % + 0.005 Ω)		
Vibration	AEC-Q200 rev. D conditions: MIL-STD-202 method 204 5 g's for 20 min, 12 cycles test from 10 Hz to 2000 Hz	± (0.2 % + 0.005 Ω)		
Mechanical Shock	AEC-Q200 rev. D conditions: MIL-STD-202 method 213 100 g's, 6 ms, 3.75 m/s 3 shocks/direction	± (0.2 % + 0.005 Ω)		
Terminal Strength	AEC-Q200 rev. D conditions: AEC-Q200-006 2 kgf, 60 s	± (0.25 % + 0.01 Ω)		

SPECIAL FEATURES						
Resistance Values	≥ 0.015	≥ 0.1	≥ 0.2	≥ 20		
Tolerances	5 %, 10 %		1 %, 2 %, 5 %, 10 %			
Typical Temperature Coefficient (-55 °C to +155 °C)	± 900 ppm/°C	± 350 ppm/°C	± 350 ppm/°C	± 200 ppm/°C		





#### CHOICE OF THE HEATSINK

The user must choose according to the working conditions of the component (power, room temperature).

Maximum working temperature must not exceed 175 °C. The dissipated power is simply calculated by the following ratio:

$$P \; = \; \frac{\Delta T}{[R_{TH \; (j \; - \; c)}] + [R_{TH \; (c \; - \; h)}] + [R_{TH \; (h \; - \; a)}]}^{(1)}$$

P: Expressed in W

 $\Delta T$ : Difference between maximum working temperature and room temperature

R<sub>TH (j - c)</sub>: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the

component

R<sub>TH (c - h)</sub>: Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance

of the interface (grease, thermal pad), and the quality of the fastening device.

 $R_{TH (h-a)}$ : Thermal resistance of the heatsink.

#### **Example:**

R<sub>TH (c - h)</sub> + R<sub>TH (h - a)</sub> for LTO 100 power rating 10 W at ambient temperature +25 °C

Thermal resistance R<sub>TH (j - c)</sub>: 1.5 °C/W

Considering equation (1) we have:


$$\begin{array}{l} \Delta T = 175~^{\circ}C - 25~^{\circ}C = 150~^{\circ}C \\ R_{TH~(j~-c)} + R_{TH~(c~-h)} + R_{TH~(h~-a)} = \frac{\Delta T}{P} = \frac{150}{10} = 15~^{\circ}C/W \\ R_{TH~(c~-h)} + R_{TH~(h~-a)} = 15~^{\circ}C/W - 1.5~^{\circ}C/W = 13.5~^{\circ}C/W \end{array}$$

with a thermal grease  $R_{TH (c-h)} = 1$  °C/W, we need a heatsink with  $R_{TH (h-a)} = 12.5$  °C/W.

#### **POWER RATING**

The temperature of the case should be maintained within the limits specified.

To improve the thermal conductivity, surfaces in contact should be coated with a silicone grease and the torque applied on the screw for tightening should be around 1 Nm.

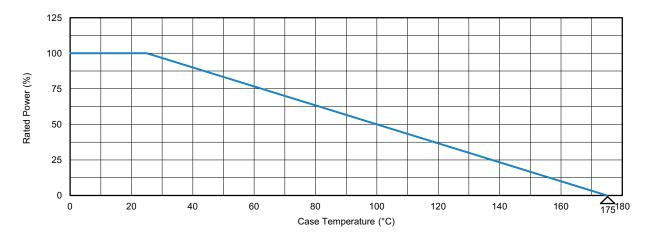


#### **OVERLOADS**

In any case the applied voltage must be lower than the maximum overload voltage of 750 V.


The values indicated on the graph below are applicable to resistors in air or mounted onto a heatsink.




### **ENERGY CURVE**

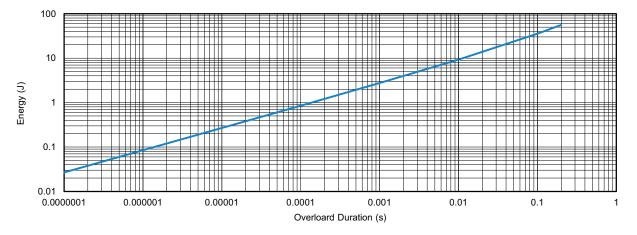

#### **POWER CURVE**

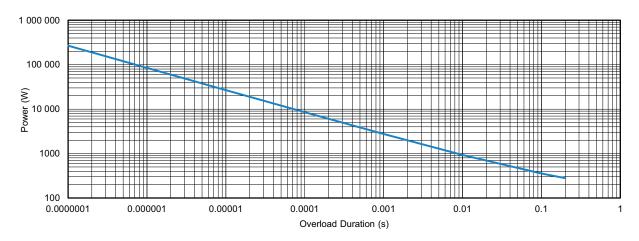

#### **IMPEDANCE CURVE** 10 $\Omega$ to 1 k $\Omega$ from 100 kHz to 300 MHz

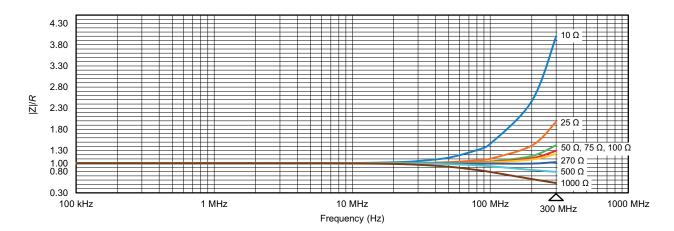



www.vishay.com


# Vishay Sfernice

PACKAGING	
Tube of 30 units	

### **MARKING**

Model, style, resistance value (in  $\Omega$ ), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

ORDERING INFORMATION							
LTO	100	F	<b>2.7 k</b> Ω	± 1 %	xxx	TU30	e3
MODEL	STYLE	CONNECTIONS	RESISTANCE VALUE	TOLERANCE	CUSTOM DESIGN	PACKAGING	LEAD (Pb)-FREE
				± 1 % ± 2 % ± 5 % ± 10 %	Optional on request: special TCR, shape etc.		

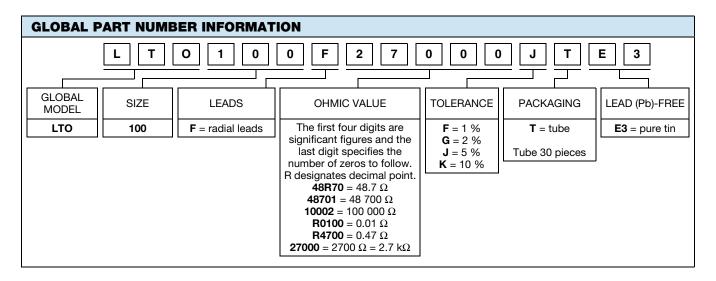



## **Legal Disclaimer Notice**

Vishay

### **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.