

Note: This datasheet may be out of date

Please download the latest datasheet of NCP21WF104J03RA from the official website of Murata Manufacturing

Co., Ltd

https://www.murata.com/en-eu/products/productdetail?partno=NCP21WF104J03RA

NCP21WF104J03RA












Appearance & Shape










- 1. Excellent solderability and high stability in environment
- 2. Excellent long time aging stability
- 3. High accuracy in resistance and B-constant
- 4. Flow / Reflow soldering possible
- 5. Same B-Constant in the same resistance in the three sizes (0805 size / 0603 size / 0402 size)

Easy to use smaller size in the circuits

- 6. Lead is not contained in the product.
- 7. NCP series are recognized by UL/cUL (UL1434, File No.E137188).



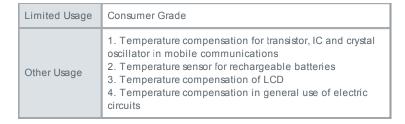



Packaging Information

Packaging	Specifications	Minimum Order Quantity
RA	180mm Embossed Tape	4000

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



URL: https://www.murata.com/

Last updated : 2018/08/23

Note: This datasheet may be out of date

Please download the latest datasheet of NCP21WF104J03RA from the official website of Murata Manufacturing

 $\underline{\text{Co., Ltd.}} \\ \text{https://www.murata.com/en-eu/products/productdetail?partno=NCP21WF104J03RA} \\$

NCP21WF104J03RA



Resistance (25°C)	100kΩ
Resistance Value Tolerance (at 25°C)	±5%
B-Constant (25/50°C)	4250K
B-Constant (25/50°C) Tolerance	±3%
B-Constant(25/80°C)(Reference Value)	4303K
B-Constant(25/85°C)(Reference Value)	4311K
B-Constant(25/100°C)(Reference Value)	4334K
Max. Voltage	5V
Maximum Operating Current (25°C)	0.045mA
Typical Dissipation Constant (25°C)	2mW/℃
Operating Temperature Range	-40°C to 125°C
Size Code (in mm)	2.0x1.25mm
Size Code (in inch)	0.8x0.5inch
Shape	SMD
Mass	0.0094g

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering




URL: https://www.murata.com/


Note: This datasheet may be out of date

Please download the latest datasheet of NCP21WF104J03RA from the official website of Murata Manufacturing Co., Ltd. https://www.murata.com/en-eu/products/productdetail?partno=NCP21WF104J03RA

NCP21WF104J03RA







Resistance-Temperature Characteristics

Maximum Operating Voltage Reduction Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



URL: https://www.murata.com/